

Product data sheet

Specifications



Variable speed drive, Altivar Process ATV600, Compact System ATV660, 800/630 kW, 480 V, IP23

ATV660C71T4X1

Main

| | |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range Of Product | Altivar Process ATV600 |
| Product Or Component Type | Variable speed drive |
| Product Specific Application | Process and utilities |
| Device Short Name | ATV660 |
| Product Destination | Synchronous motors Asynchronous motors |
| Assembly Style | In floor-standing enclosure compact version |
| Provided Equipment | Enclosure Spacial SF Graphical operating panel in the enclosure door Frequency inverter Main switch Line choke Terminal block main supply Terminal block motor |
| Cable Entry | Bottom |
| Colour Of Enclosure | Light grey (RAL 7035) |
| Ip Degree Of Protection | IP23 conforming to IEC 61800-5-1 |
| Type Of Cooling | Forced convection |
| [Us] Rated Supply Voltage | 480 V +/- 10 % |
| Supply Frequency | 50/60 Hz +/-5 % |
| Network Number Of Phases | 3 phases |
| Overvoltage Category | III |
| Asynchronous Motor Control Profile | Variable torque standard Constant torque standard Optimized torque mode |
| Synchronous Motor Control Profile | Permanent magnet motor |
| Output Voltage | <= power supply voltage |
| Permissible Temporary Current Boost | 1.1 x In during 60 s (normal duty) 1.5 x In during 60 s (heavy duty) |
| Nominal Switching Frequency | 2.5 kHz |
| Switching Frequency | 2...8 kHz adjustable with derating factor |
| Speed Drive Output Frequency | 0.1...500 Hz |
| Motor Power Kw | 800 kW for normal duty 630 kW for heavy duty |
| Continuous Output Current | 1260 A at 2.5 kHz for normal duty 1020 A at 2.5 kHz for heavy duty |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum Transient Current | 1386 A during 60 s per 10 min (normal duty) 1530 A during 60 s per 10 min (heavy duty) |
| Line Current | 1119 A at 480 V (normal duty) 893 A at 480 V (heavy duty) |
| Apparent Power | 931 kVA at 480 V (normal duty) 742 kVA at 480 V (heavy duty) |
| Maximum Thdi | <38 % full load conforming to IEC 61000-3-12 |
| Short-Circuit Protection | Internal: 400.0 A 5 aR fuse Upstream: 1600.0 A gG fuse (normal duty) Upstream: 1250.0 A gG fuse (heavy duty) |
| Energy Efficiency Ratio | 0.98 |
| Power Dissipation In W | 17600 W, total (normal duty) 13000 W, total (heavy duty) 1900 W, control part (normal duty) 1300 W, control part (heavy duty) |
| Volume Of Cooling Air | 2900 m3/h for power 420 m3/h for control |
| Noise Level | 74 dB conforming to 86/188/EEC - physical agents (noise) directive |
| Prospective Line Isc | 50 kA for 100 ms |
| Electrical Connection | Removable screw terminals, clamping capacity: 0.5...1.5 mm² for control M12 bar for main supply M12 bar for motor |
| Motor Recommended Cable Cross Section | 5 x (3 x 185 mm²) (normal duty) 6 x (3 x 150 mm²) (normal duty) 4 x (3 x 185 mm²) (heavy duty) 5 x (3 x 150 mm²) (heavy duty) |
| Width | 1400 mm |
| Height | 2150 mm |
| Depth | 664 mm |
| Net Weight | 1100 kg |
| Number Of Preset Speeds | 16 preset speeds |
| Communication Port Protocol | Modbus serial EtherNet/IP Modbus TCP |
| Option Card | Slot A: communication module, Profibus DP V1 Slot A: communication module, PROFINET Slot A: communication module, DeviceNet Slot A: communication module, Modbus TCP/EtherNet/IP Slot A: communication module, CANopen daisy chain RJ45 Slot A: communication module, CANopen SUB-D 9 Slot A: communication module, CANopen screw terminals Slot A/slot B: digital and analog I/O extension module Slot A/slot B: output relay extension module |
| Safety Function | STO (safe torque off), level SIL 3 for <= 100 ms |
| Emc Filter | Integrated conforming to EN/IEC 61800-3, category C3, shielded cable with 150 m Integrated conforming to EN/IEC 61800-3, category C4, unshielded cable with 250 m |

Complementary

| | |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Motor Slip Compensation | Not available in permanent magnet motor law Automatic whatever the load Adjustable Can be suppressed |
| Acceleration And Deceleration Ramps | S, U or customized Linear adjustable separately from 0.01 to 9000 s |
| Braking To Standstill | By DC injection |

| | |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protection Type | Motor: thermal protection Motor: safe torque off Motor: motor phase break Drive: thermal protection Drive: safe torque off Drive: overheating Drive: overcurrent (between output phases and earth) Drive: overload (output) Drive: short-circuit protection Drive: motor phase break Drive: overvoltage (DC bus) Drive: line supply overvoltage Drive: line supply undervoltage Drive: line supply phase loss Drive: overspeed Drive: break on the control circuit Drive: short-circuit protection with semi-conductor fuse (main supply) Drive: fan monitoring |
| Frequency Resolution | Display unit: 0.1 Hz Analog input: 0.012/50 Hz |
| Connector Type | RJ45 (on the control block) for Modbus serial RJ45 (on the control block) for Ethernet IP/Modbus TCP |
| Physical Interface | 2-wire RS 485 for Modbus serial |
| Transmission Frame | RTU for Modbus serial |
| Transmission Rate | 10/100 Mbit/s for Ethernet IP/Modbus TCP 4.8, 9.6, 19.2, 38.4 kbit/s for Modbus serial |
| Exchange Mode | Half duplex, full duplex, autonegotiation Ethernet IP/Modbus TCP |
| Data Format | 8 bits, configurable odd, even or no parity for Modbus serial |
| Type Of Polarization | No impedance for Modbus serial |
| Number Of Addresses | 1...247 for Modbus serial |
| Method Of Access | Slave Modbus TCP |
| Supply | External supply for digital inputs: 24 V DC (10...30 V), <1.25 mA, protection type: overload and short-circuit protection Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection Internal supply for digital inputs and STO: 24 V DC (21...27 V), <200 mA, protection type: overload and short-circuit protection |
| Local Signalling | LCD display unit front door operation function, status and configuration |
| Analogue Input Number | 3 |
| Analogue Input Type | AI1, AI2, AI3 software-configurable voltage: 0...10 V DC, impedance: 30 kOhm, resolution 12 bits AI1, AI2, AI3 software-configurable current: 0...20 mA, impedance: 250 Ohm, resolution 12 bits |
| Discrete Input Number | 8 |
| Discrete Input Type | DI1...DI6 programmable, 24 V DC (<= 30 V), impedance: 3.5 kOhm DI5, DI6 programmable as pulse input: 0...30 kHz, 24 V DC (<= 30 V) STOA, STOB safe torque off, 24 V DC (<= 30 V), impedance: > 2.2 kOhm |
| Input Compatibility | DI1...DI6: discrete input level 1 PLC conforming to EN/IEC 61131-2 DI5, DI6: discrete input level 1 PLC conforming to IEC 65A-68 STOA, STOB: discrete input level 1 PLC conforming to EN/IEC 61131-2 |
| Discrete Input Logic | Positive logic (source) (DI1...DI6), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (DI1...DI6), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (DI5, DI6), < 0.6 V (state 0), > 2.5 V (state 1) Positive logic (source) (STOA, STOB), < 5 V (state 0), > 11 V (state 1) |
| Analogue Output Number | 2 |
| Analogue Output Type | Software-configurable voltage AQ1, AQ2: 0...10 V DC impedance 470 Ohm, resolution 10 bits Software-configurable current AQ1, AQ2: 0...20 mA, resolution 10 bits |

| | |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sampling Duration | 2 ms +/- 0.5 ms (DI1...DI4) - discrete input 5 ms +/- 1 ms (DI5, DI6) - discrete input 5 ms +/- 1 ms (AI1, AI2, AI3) - analog input 10 ms +/- 1 ms (AQ1, AQ2) - analog output |
| Accuracy | +/- 0.6 % AI1, AI2, AI3 for a temperature variation 60 °C analog input +/- 1 % AQ1, AQ2 for a temperature variation 60 °C analog output |
| Linearity Error | AI1, AI2, AI3: +/- 0.15 % of maximum value for analog input AQ1, AQ2: +/- 0.2 % for analog output |
| Relay Output Number | 3 |
| Relay Output Type | Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles Configurable relay logic R2: sequence relay NO electrical durability 100000 cycles Configurable relay logic R3: sequence relay NO electrical durability 100000 cycles |
| Refresh Time | Relay output (R1, R2, R3): 5 ms (+/- 0.5 ms) |
| Minimum Switching Current | Relay output R1, R2, R3: 5 mA at 24 V DC |
| Maximum Switching Current | Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 250 V AC Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 30 V DC Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC |
| Isolation | Between power and control terminals |

Environment

| | |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insulation Resistance | > 1 MOhm 500 V DC for 1 minute to earth |
| Operating Position | Vertical +/- 10 degree |
| Electromagnetic Compatibility | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 |
| Pollution Degree | 2 conforming to EN/IEC 61800-5-1 |
| Vibration Resistance | 1.5 mm peak to peak (f= 3...10 Hz) conforming to IEC 60068-2-6 0.6 gn (f= 10...200 Hz) conforming to IEC 60068-2-6 3M3 conforming to IEC 60721-3-3 |
| Shock Resistance | 4 gn for 11 ms conforming to IEC 60068-2-27 3M2 conforming to IEC 60721-3-3 |
| Relative Humidity | 5...95 % without condensation conforming to IEC 60068-2-3 |
| Ambient Air Temperature For Operation | -10...0 °C without derating (with option enclosure heating) 0...40 °C without derating 40...50 °C with derating factor |
| Ambient Air Temperature For Storage | -25...70 °C |
| Operating Altitude | < 1000 m without derating 1000...2000 m with current derating 1 % per 100 m 2000...3800 m with current derating 1 % per 100 m for TT earthing system 2000...3800 m with current derating 1 % per 100 m for TN earthing system 2000...3800 m with current derating 1 % per 100 m for IT earthing system 3800...4800 m with current derating 1 % per 100 m for TT earthing system 3800...4800 m with current derating 1 % per 100 m for TN earthing system |
| Environmental Characteristic | Chemical pollution resistance class 3C3 conforming to EN/IEC 60721-3-3 Dust pollution resistance class 3S3 conforming to EN/IEC 60721-3-3 Humidity resistant class 3K3 conforming to EN/IEC 60721-3-3 |
| Standards | EN/IEC 60204-1 EN/IEC 61800-2 EN/IEC 61800-3 EN/IEC 61800-5-1 |

| | |
|------------------------|-----------------------|
| Product Certifications | ATEX EAC C-Tick |
| Marking | CE |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type Of Package 1 | PCE |
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 215.0 cm |
| Package 1 Width | 66.9 cm |
| Package 1 Length | 140.0 cm |
| Package 1 Weight | 1165.0 kg |

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Take-back

Resource performance

✔ Take-Back Program Available

Well-being performance

✔ Mercury Free

✔ Rohs Exemption Information [Yes](#)

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive [Pro-active compliance \(Product out of EU RoHS legal scope\)](#)


China Rohs Regulation [China RoHS declaration](#)

Weeee [The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins](#)

Dimensions Drawings

Dimensions


Right and Front Views

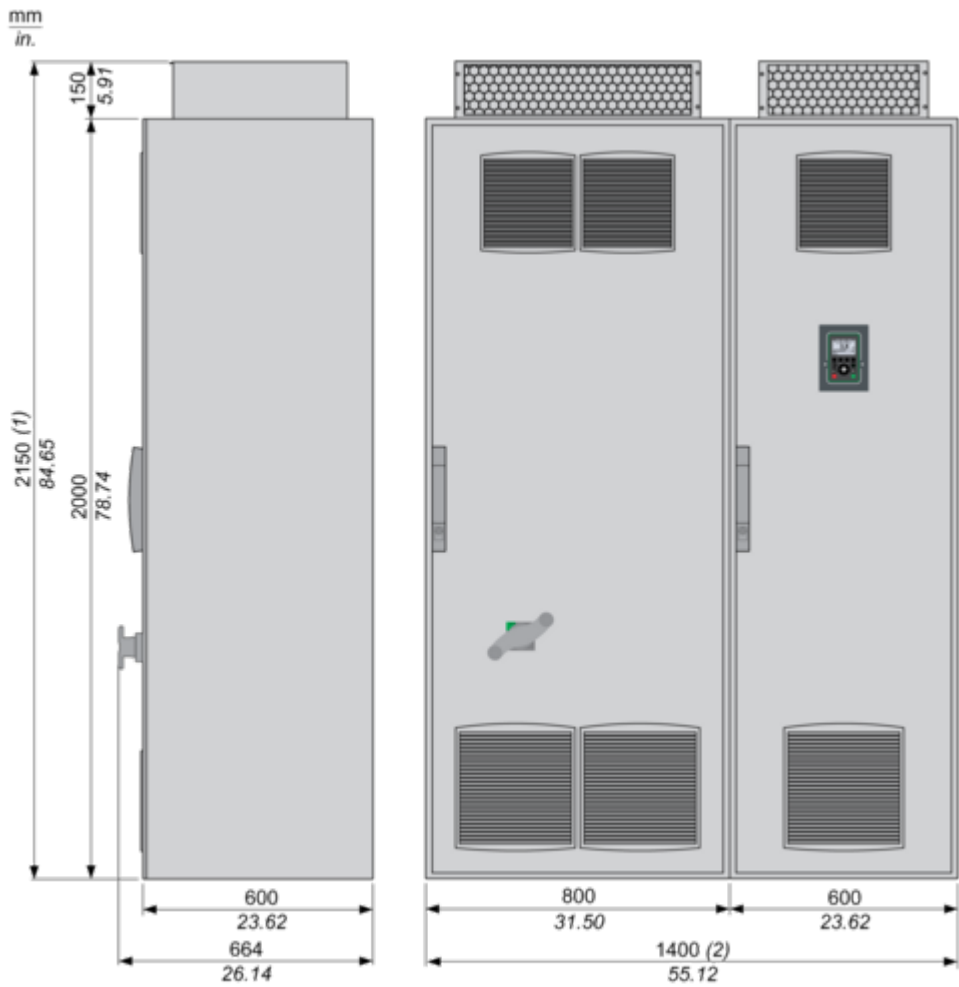

- (1) + 200 mm / 7.87 in. with option enclosure plinth or increased protection degree IP54
(2) + 600 mm / 23.62 in. with option connection enclosure cable from top/bottom

Mounting and Clearance


Mounting and Clearance

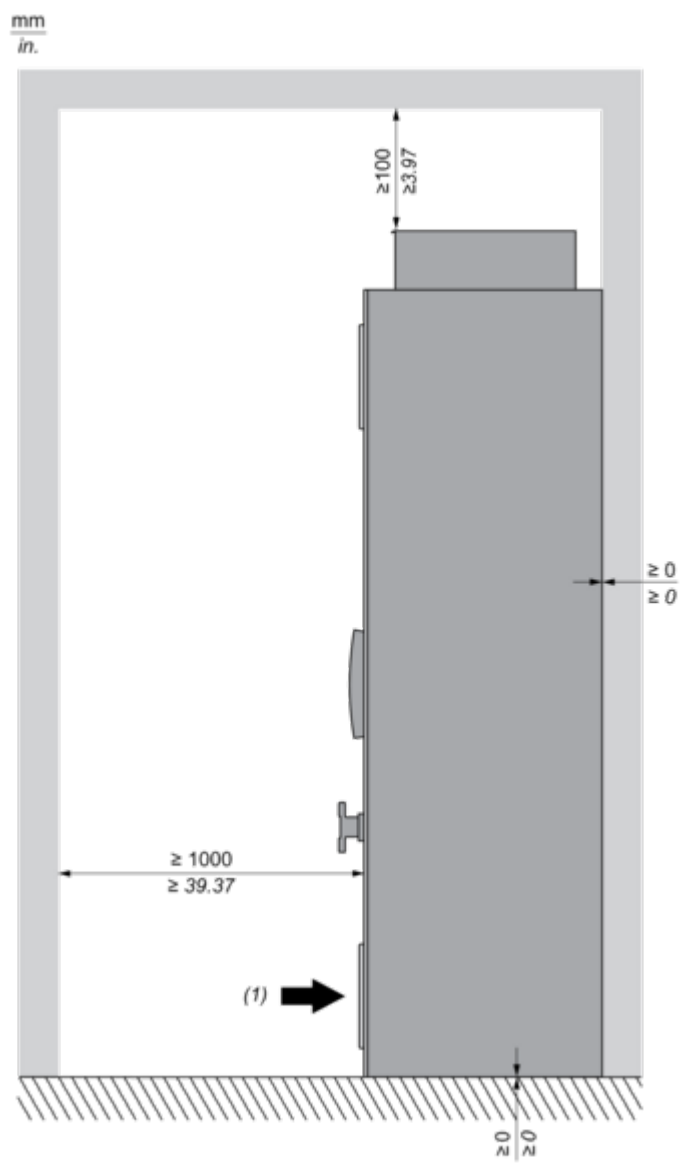

(1) Air inflow temperature: -10...+50 °C (below 0 °C with option enclosure heating, above +40 °C with derating).

Connections and Schema

Typical Wiring Diagram of the Frequency Inverter

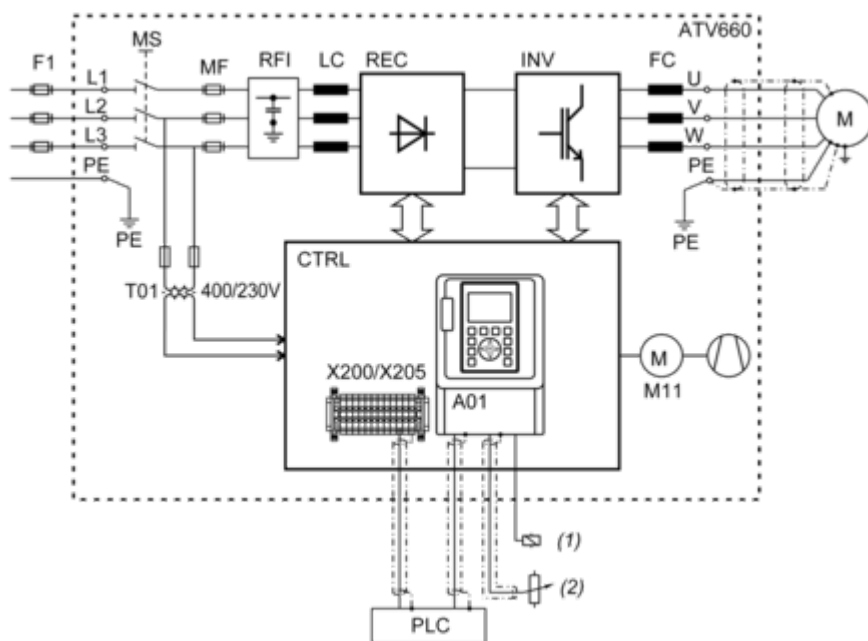

F1 External pre-fuse or circuit breaker

MS Built-in main switch

T01 Control transformer 400 / 230 V AC

MF aR fuses

RFI Built-in RFI filter

LC Line reactor choke

REC Rectifier module

INV Inverter module

FC dv/dt filter (from 355 kW the dv/dt filter choke 150 m is built-in as standard)

CTRL Control panel

A01 Control terminals at the control block


X200 / X205 Control terminals at the control panel (depending on the chosen options)

M11 Fan in enclosure door

(1) Relay control


(2) Reference value

Structure of the Control Block

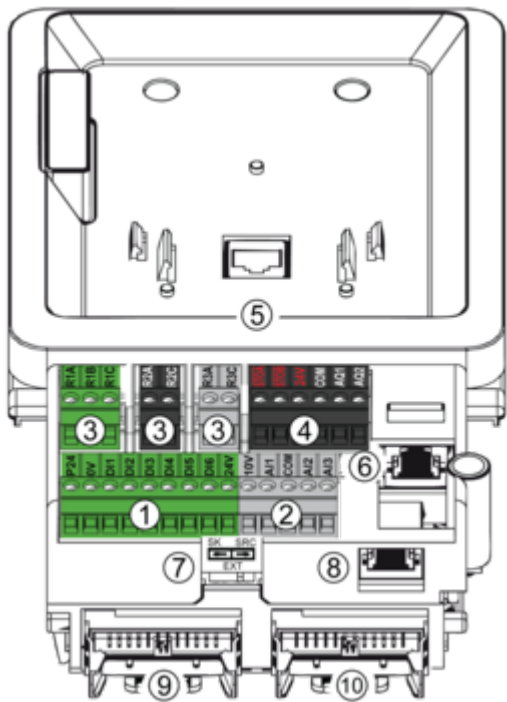

- (1) Digital inputs
- (2) Analog inputs
- (3) Relay outputs
- (4) STO (Safe Torque Off) and analog outputs
- (5) RJ45 port for door mounting kit of the graphic keypad
- (6) RJ45 port for Ethernet IP or Modbus TCP
- (7) Sink-Ext-Source selector switch (see switch configuration below)
- (8) RJ45 port for serial Modbus
- (9) Slot for I/O expansion card
- (10) Slot for fieldbus or I/O expansion card


Control Block Wiring Diagram

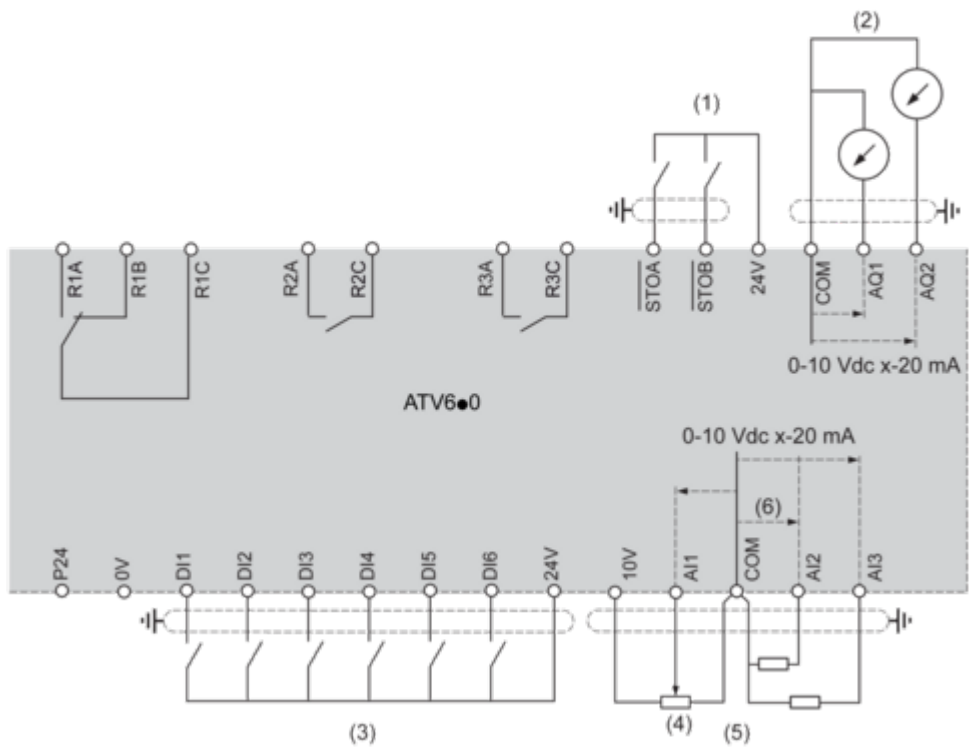

- (1) Safe Torque Off
- (2) Analog Output
- (3) Digital Input
- (4) Reference potentiometer
- (5) Analog Input
- R1A, R1B, R1C : Fault relay
- R2A, R2C : Sequence relay
- R3A, R3C : Sequence relay

Sensor Connection

It is possible to connect either 1 or 3 sensors on terminals AI2 or AI3.

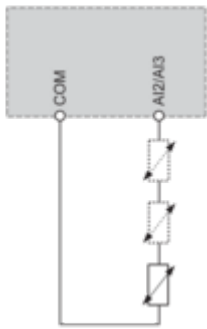


Sink / Source Switch Configuration


The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.


Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs

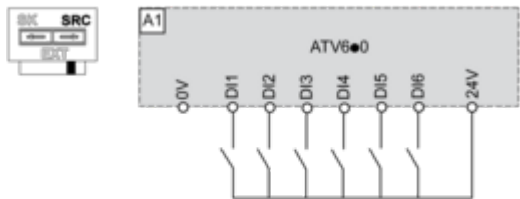


Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs

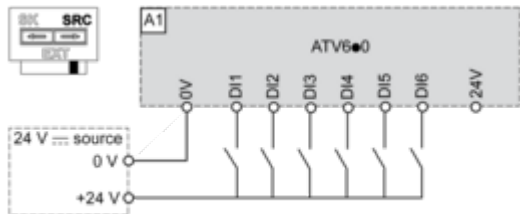

Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs

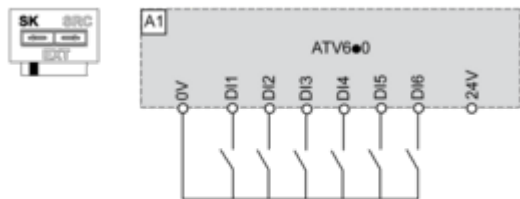


Switch Set to EXT Position Using an External Power Supply for the DIs

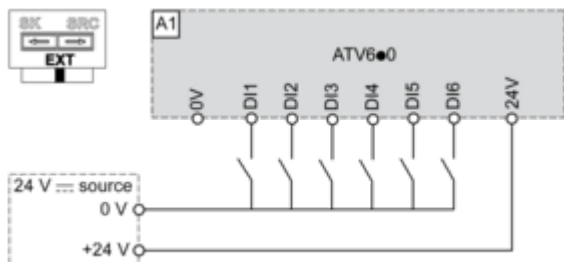

Performance Curves


Derating Curves

Normal Duty

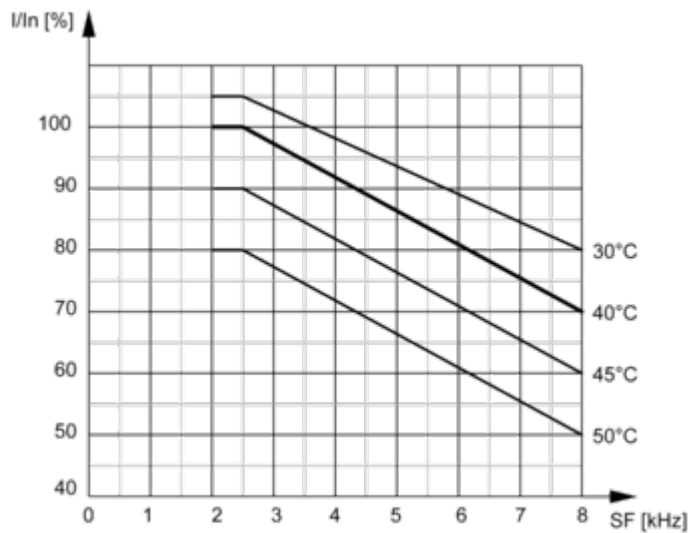

In : Nominal Drive Current
SF : Switching Frequency

Heavy Duty

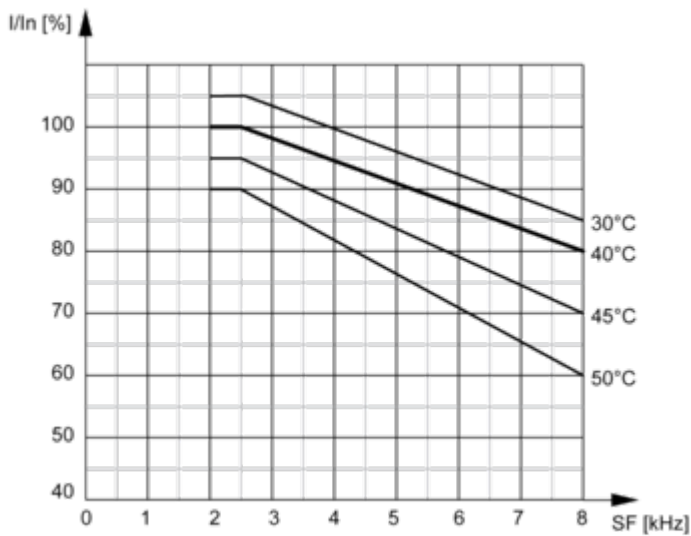

In : Nominal Drive Current
SF : Switching Frequency