

Enclosure, Resi9 MP, surface mounting, 2 rows of 12 modules, IP40, white door, no terminal block

MIP10212

### Main

| Range                       | Resi9             |
|-----------------------------|-------------------|
| Product Name                | Resi9 MP          |
| Product Or Component Type   | Enclosure         |
| Enclosure Type              | Modular enclosure |
| Nb Of 18 Mm Modules Per Row | 12                |
| Nb Of Horizontal Rows       | 2                 |
| Type Of Door                | Plain             |
| Width                       | 268 mm outside:   |
| Height                      | 353 mm outside:   |
| Depth                       | 102 mm outside:   |

### Complementary

| Enclosure Mounting            | Surface  |
|-------------------------------|--|
| 9 Mm Pitches                  | 24   |
| Total Number Of 18 Mm Modules | 24   |
| [In] Rated Current            | 63 A   |
| Type Of Rail                  | 35 mm asymmetrical rail  |
| Mounting Plate Description    | Without mounting plate   |
| Cable Entry                   | 1 trunking flange<br>1 bare flange                                     |
| Terminal Block Function       | Without  |
| Enclosure Material            | Back part: technoplastic Door: technoplastic Front face: technoplastic |
| Internal Depth                | 80 mm  |
| Colour                        | Door: white (RAL 9003) Front face: white (RAL 9003)                    |
| Market Segment                | Residential  |

#### **Environment**

| Quality Labels | IEC 60670-24 |  |
|----------------|--------------|--|
|                | IEC 60670-1  |  |
|                | IEC 61439-3  |  |
| Standards      | IEC 61439-1  |  |

| Fire Resistance                       | Door: 650 °C<br>Back part: 650 °C<br>Front face: 650 °C |
|---------------------------------------|---|
| Ip Degree Of Protection               | IP40  |
| Ik Degree Of Protection               | IK07  |
| Ambient Air Temperature For Operation | -2560 °C  |

# **Packing Units**

| Unit Type Of Package 1       | PCE      |
|------------------------------|----------|
| Number Of Units In Package 1 | 1        |
| Package 1 Height             | 10.2 cm  |
| Package 1 Width              | 26.8 cm  |
| Package 1 Length             | 35.3 cm  |
| Package 1 Weight             | 1.01 kg  |
| Unit Type Of Package 2       | BB1      |
| Number Of Units In Package 2 | 5        |
| Package 2 Height             | 52.0 cm  |
| Package 2 Width              | 30.0 cm  |
| Package 2 Length             | 40.0 cm  |
| Package 2 Weight             | 5.15 kg  |
| Unit Type Of Package 3       | P12      |
| Number Of Units In Package 3 | 80       |
| Package 3 Height             | 120.0 cm |
| Package 3 Width              | 80.0 cm  |
| Package 3 Length             | 120.0 cm |
| Package 3 Weight             | 94.4 kg  |
|                              |          |

# **Contractual warranty**

Warranty 18 months

### **Sustainability**

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >


Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance

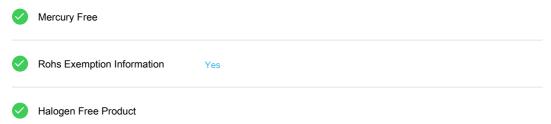

#### **Certifications & Standards**

| Reach Regulation         | REACh Declaration   |
|--------------------------|---|
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope)  |
| China Rohs Regulation    | China RoHS declaration  Product out of China RoHS scope. Substance declaration for your information |
| Environmental Disclosure | Product Environmental Profile   |
| Circularity Profile      | No need of specific recycling operations  |