Arc sensor, 20 m, shielded



REL52803

Main

Range Of Product	Easergy P3
Product Or Component Type	Arc sensor
Type Of Cable	Shielded cable
Light Spectrum Sensitivity Area	4001100 nm

Complementary

Cable Length	20 m
Width	55 mm
Height	25 mm
Depth	14 mm
Net Weight	0.9 kg

Environment

Pollution Degree	2
Ambient Air Temperature For Operation	-2570 °C

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.0 cm
Package 1 Width	27.0 cm
Package 1 Length	27.0 cm
Package 1 Weight	100.0 g

Sustainability

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

Reach Free Of Svhc

Mercury Free

Rohs Exemption Information


Yes

Certifications & Standards

Reach Regulation REACh Declaration Compliant with Exemptions **Eu Rohs Directive China Rohs Regulation** China RoHS declaration **Environmental Disclosure** Product Environmental Profile Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins **Circularity Profile** End of Life Information WARNING: This product can expose you to chemicals including: Lead and lead California Proposition 65 compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Arc Flash Sensors

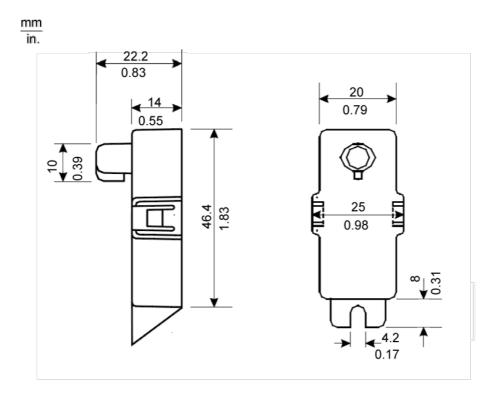

Arc Flash Sensors: Sensitivity Area

