



### Main

|                                    |   |
|------------------------------------|---|
| Range of product                   | Harmony XVC1  |
| Product or component type          | Complete pre-wired monolithic tower light   |
| Beacon or indicator bank unit type | 2 illuminated units   |
| Sound signalling                   | Siren   |
| Mounting diameter                  | 100 mm  |
| Component name                     | XVC   |
| Light source                       | Orange LED steady or flashing signalling<br>Red LED steady or flashing signalling |
| [Us] rated supply voltage          | 24 V  |
| Supply circuit type                | AC  |
| Noise level                        | 0...102 dB (continuous or intermittent tone) at 1 m                               |

### Complementary

|  |  |
|--|--|
| Material                               | Illuminated unit : polycarbonate<br>Base unit : ABS (acrylonitrile butadiene-styrene)<br>Top cover : PBT + ABS (UL94-V0) |
| Product mounting                       | On base  |
| Cable cross section                    | 0.33 mm <sup>2</sup><br>0.83 mm <sup>2</sup>   |
| AWG gauge                              | AWG 18<br>AWG 22   |
| Cable length                           | 500 mm   |
| Marking                                | CE   |
| [Uimp] rated impulse withstand voltage | 0.8 kV   |
| Current consumption                    | 550 mA   |
| Flashing frequency                     | 0.7...3 Hz   |
| Product weight                         | 1.78 kg  |
| Height                                 | 371 mm   |

## Environment

|                                       |  |
|---------------------------------------|--|
| Standards                             | EN/IEC 61000-6-2<br>EN/IEC 61000-6-3<br>EN/IEC 61000-6-4 |
| Product certifications                | UL   |
| Protective treatment                  | TC   |
| Ambient air temperature for storage   | -35...70 °C  |
| Ambient air temperature for operation | -20...50 °C  |
| Electrical shock protection class     | Class II conforming to EN/IEC 61140                      |
| IP degree of protection               | IP54 conforming to EN/IEC 60529                          |

## Offer Sustainability

|                                  |  |
|----------------------------------|--|
| Sustainable offer status         | Green Premium product  |
| RoHS (date code: YYWW)           | Compliant<br><a href="#">Schneider Electric declaration of conformity</a>  |
| REACH                            | Reference not containing SVHC above the threshold<br><a href="#">Reference not containing SVHC above the threshold</a> |
| Product environmental profile    | Available  |
| Product end of life instructions | Need no specific recycling operations  |


## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Pre-assembled and Pre-wired Tower Light with Siren

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

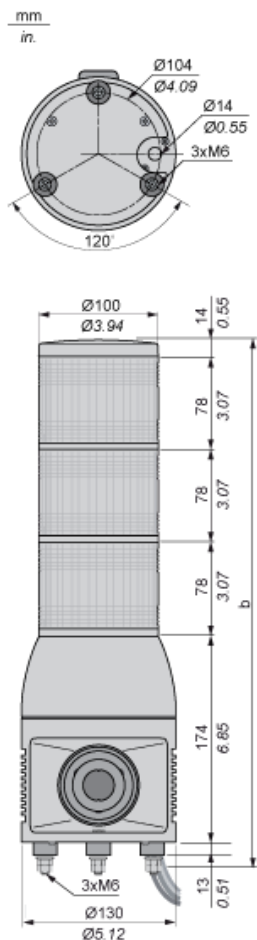

| No. of illuminated units | b in mm | b in in. |
|--------------------------|---------|----------|
| 1                        | 293     | 11.54    |
| 2                        | 371     | 14.61    |
| 3                        | 449     | 17.68    |

Pre-assembled and Pre-wired Tower Light with Siren

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

