



ⓘ Discontinued

### Main

Range of product	Altivar 61 Plus
Product or component type	Variable speed drive
Device short name	ATV61
Product destination	Synchronous motors Asynchronous motors
Product specific application	Pumping and ventilation machine
Assembly style	In floor-standing enclosure with separate air flows Ready to use
Product composition	A plinth A DC choke Circuit breaker A wired ready-assembled Sarel Spacial 6000 enclosure An IP65 remote mounting kit for graphic display terminal ATV61HC13N4 drive on heatsink Motor terminals
EMC filter	Integrated
Network number of phases	3 phases
Rated supply voltage	380...415 V +/- 10 %
Supply frequency	50...60 Hz
Motor power kW	132 kW, 3 phases at 380...415 V
Line current	227 A at 400 V 3 phases / 132 kW
IP degree of protection	IP54

### Complementary

Apparent power	157 kVA for 400 V 3 phases / 132 kW
Prospective line I <sub>sc</sub>	50 kA with external fuses
Continuous output current	259 A at 2.5 kHz, 400 V 3 phases
Maximum transient current	311 A for 60 s 3 phases
Speed drive output frequency	0.1...500 Hz
Nominal switching frequency	2.5 kHz
Switching frequency	2...8 kHz adjustable 2.5...8 kHz with derating factor
Speed range	1...100 in open-loop mode, without speed feedback
Speed accuracy	+/- 10 % of nominal slip 0.2 T <sub>n</sub> to T <sub>n</sub> without speed feedback

Torque accuracy	+/- 15 % in open-loop mode, without speed feedback
Transient overtorque	120 % of nominal motor torque for 60 s 135 % of nominal motor torque for 2 s
Braking torque	30 % without braking resistor <= 125 % with braking resistor
Asynchronous motor control profile	Voltage/frequency ratio, 2 points Voltage/frequency ratio - Energy Saving, quadratic U/f Voltage/frequency ratio, 5 points Flux vector control without sensor, standard
Synchronous motor control profile	Vector control without sensor, standard
Regulation loop	Adjustable PI regulator
Motor slip compensation	Adjustable Suppressable Not available in voltage/frequency ratio (2 or 5 points) Automatic whatever the load
Supply voltage limits	342...457 V
Network frequency limits	47.5...63 Hz
Overvoltage category	Class 3 conforming to EN 50178
Local signalling	LCD display unit operation function, status and configuration:
Output voltage	<= supply voltage
Isolation	Electrical between power and control
Type of cable for external connection	IEC cable at 40 °C, copper 70 °C / PVC
Electrical connection	Terminal M12 - 2 x 185 mm <sup>2</sup> (L1/R, L2/S, L3/T) Terminal M10 - 2 x 150 mm <sup>2</sup> (U/T1, V/T2, W/T3) Terminal - 2.5 mm <sup>2</sup> / AWG 14 (AI1-/AI1+, AI2, AO1, R1A, R1B, R1C, R2A, R2B, LI1...LI6, PWR)
Motor recommended cable cross section	3 x 150 mm <sup>2</sup>
Short-circuit protection	315 A fuse protection type gI - power supply upstream
Supply	External supply: 24 V (19...30 V)DC, <1 A Internal supply for reference potentiometer: 10 V (10...11 V)DC, <10 A Internal supply: 24 V (21...27 V)DC, <100 A
Analogue input number	2
Analogue input type	AI2 software-configurable voltage: 0...10 V DC, 24 V max, impedance: 30 kOhm, sampling time: 1.5...2.5 ms, resolution: 11 bits AI1-/AI1+ bipolar differential voltage: +/- 10 V DC, 24 V max, sampling time: 1.5...2.5 ms, resolution: 11 bits + sign AI2 software-configurable current: 0...20 mA/4...20 mA, impedance: 250 Ohm, sampling time: 1.5...2.5 ms, resolution: 11 bits
Analogue output number	1
Analogue output type	Software-configurable voltage: (AO1) 0...10 V DC - 470 Ohm - sampling time: 1.5...2.5 ms - resolution: 10 bits Software-configurable current: (AO1) 0...20 mA/4...20 mA - 500 Ohm - sampling time: 1.5...2.5 ms - resolution: 10 bits
Discrete output number	2
Discrete output type	Configurable relay logic: (R1A, R1B, R1C)NO/NC - 6.5...7.5 ms - 100000 cycles Configurable relay logic: (R2A, R2B)NO - 6.5...7.5 ms - 100000 cycles
Minimum switching current	3 mA at 24 V DC (configurable relay logic)
Maximum switching current	5 A at 250 V AC on resistive load - cos phi = 1 for configurable relay logic 2 A at 30 V DC on inductive load - L/R = 7 ms for configurable relay logic 5 A at 30 V DC on resistive load - L/R = 0 ms for configurable relay logic 2 A at 250 V AC on inductive load - cos phi = 0.4 for configurable relay logic
Discrete input number	7
Discrete input type	Programmable (LI1...LI5) at 24 V DC <= 30 V level 1 PLC 3.5 kOhm (duration=1.5...2.5 ms) Switch-configurable (LI6) at 24 V DC <= 30 V level 1 PLC 1.5 kOhm (duration=1.5...2.5 ms) Safety input (PWR) at 24 V DC <= 30 V 1.5 kOhm
Discrete input logic	Positive (PWR), 0...2 V (state 0), 17...30 V (state 1) Positive (LI1...LI6), 0...5 V (state 0), 11...30 V (state 1) Negative (LI1...LI6), 16...30 V (state 0), 0...10 V (state 1)
Acceleration and deceleration ramps	Linear adjustable separately from 0.01 to 9000 s S, U or customized
Braking to standstill	By DC injection, <60 s
Protection type	Overheating protection: drive

Thermal protection: drive  
 Short-circuit between motor phases: drive  
 Input phase breaks: drive  
 Overcurrent between output phases and earth: drive  
 Overvoltages on the DC bus: drive  
 Break on the control circuit: drive  
 Against exceeding limit speed: drive  
 Line supply undervoltage: drive  
 Line supply overvoltage: drive  
 Against input phase loss: drive  
 Thermal protection: motor  
 Motor phase break: motor  
 Power removal: drive  
 Power removal: motor

Dielectric strength	3535 V DC between earth and power terminals 5092 V DC between control and power terminals
Insulation resistance	> 1 mOhm 500 V DC for 1 minute
Frequency resolution	Display unit: 0.1 Hz Analog input: 0.024/50 Hz
Communication port protocol	Modbus CANopen
Connector type	1 RJ45 (on front face) for Modbus 1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen
Physical interface	2-wire RS 485 for Modbus
Transmission frame	RTU for Modbus
Transmission rate	9600 bps, 19200 bps for Modbus on front face 4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen
Data format	8 bits, 1 stop, even parity for Modbus on front face 8 bits, odd even or no configurable parity for Modbus on terminal
Type of polarization	No impedance for Modbus
Number of addresses	1...247 for Modbus 1...127 for CANopen
Method of access	Slave CANopen
Operating position	Vertical +/- 10 degree
Colour of enclosure	Light grey (RAL 7035)
Colour of base of enclosure	Dark grey (RAL 7022)
Width	600 mm
Height	2362 mm
Depth	642 mm
Net weight	300 kg

## Environment

Electromagnetic compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 1.2/50 $\mu$ s - 8/20 $\mu$ s surge immunity test level 3 conforming to IEC 61000-4-5 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11
Standards	EN 55011 class A group 2 EN 61800-3 environments 1 category C3 EN/IEC 61800-3 EN 61800-3 environments 2 category C3 EN/IEC 61800-5-1
Product certifications	GOST ATEX
Marking	CE
Noise level	64 dB
Pollution degree	3 conforming to EN/IEC 61800-5-1
Vibration resistance	1.5 mm (f= 3...10 Hz) conforming to EN/IEC 60068-2-6 0.6 gn (f= 10...200 Hz) conforming to EN/IEC 60068-2-6 3M3 conforming to EN/IEC 60721-3-3


Shock resistance	4 gn for 11 ms conforming to EN/IEC 60068-2-27 3M2 conforming to EN/IEC 60721-3-3
Environmental characteristic	3C2 without condensation conforming to IEC 60721-3-3 3S2 without condensation conforming to IEC 60721-3-3 3K3 without condensation conforming to IEC 60721-3-3
Relative humidity	0...95 %
Ambient air temperature for operation	0...40 °C (without) 40...50 °C (with current derating of 2 % per °C)
Ambient air temperature for storage	-25...70 °C
Volume of cooling air	700 m3/h
Operating altitude	<= 1000 m without 1000...3000 m with current derating 1 % per 100 m

### Contractual warranty

Warranty	18 months
----------	-----------

Ready to Use IP 54 Enclosure


Dimensions

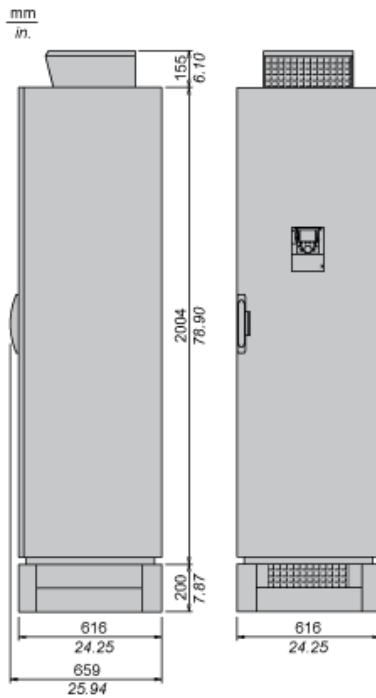

NOTE: For each floor-standing enclosure added, allow a 4 mm/0.15 in. space for the seal.

Ready to Use IP 54 Enclosure

Wiring Diagram

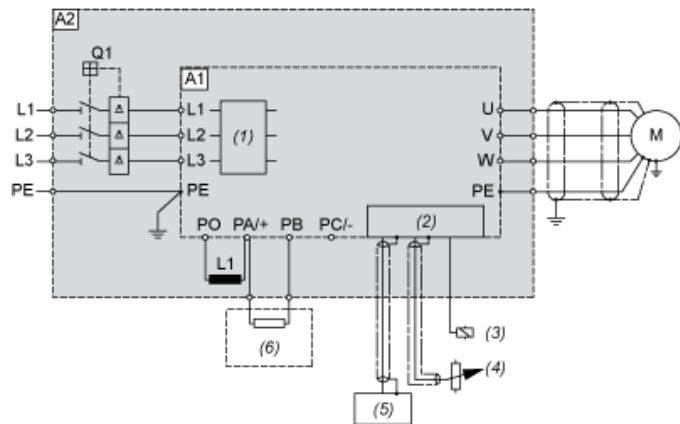


- A1 Drive
- A2 Enclosure
- L1 DC choke
- M Motor
- Q1 Circuit breaker
- (1) Filter
- (2) Control
- (3) Relay control
- (4) Reference potentiometer
- (5) PLC
- (6) External optional braking resistor

## Ready to Use IP 54 Enclosure

### Derating Curves

The derating curves for the drive nominal current ( $I_n$ ) are dependent on the temperature and switching frequency. For intermediate temperatures, interpolate between 2 curves.

NOTE: The drive will reduce the switching frequency automatically in the event of excessive temperature rise.

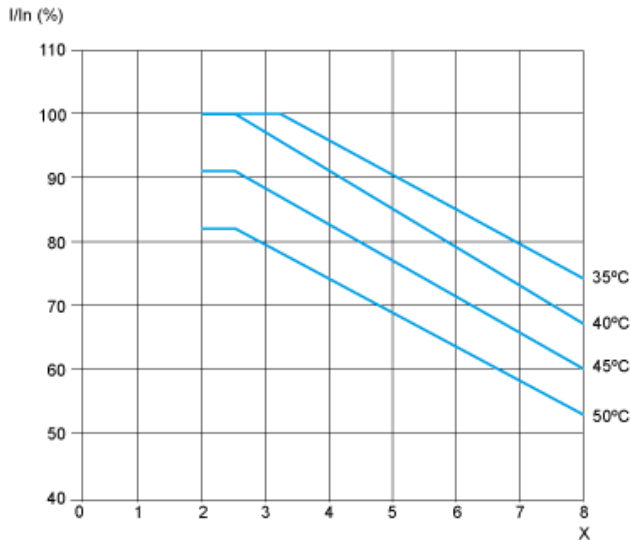

X Switching frequency (kHz)

NOTE: The temperatures shown correspond to the temperature of the air entering the enclosure.

## ATV61ES5C13N4 may be replaced by any of the following products:



### Drive Products ATV650C13N4F

variable speed drive ATV650 - 130kW - 380...440V - IP54 - disconnect switch

Qty 1

Reason for Substitution: End of life | Substitution date: 01 April 2016



### Drive Products ATV650C16N4F

variable speed drive ATV650 - 160kW - 380...440V - IP54 - disconnect switch

Qty 1

Reason for Substitution: End of life | Substitution date: 01 April 2016