

# Product data sheet

Specifications



## enclosed variable speed drive ATV71 Plus - 1200 kW - 690V - IP54

ATV71EXA5M12Y

⚠ Discontinued - Service only

⚠ Discontinued on: Dec 31, 2023

⚠ To be end-of-service on: Dec 31, 2031

### Main

Range Of Product	Altivar 71 Plus
Product Or Component Type	Variable speed drive
Device Short Name	ATV71 Plus
Product Destination	Asynchronous motors Synchronous motors
Product Specific Application	Complex, high-power machines
Assembly Style	In floor-standing enclosure with separate air flows With integrated cooling circuit
Product Composition	A switch and fast-acting fuses Integrated drive system ATV71EM12YE1 Terminals/bars for motor connection A wired ready-assembled Sarel Spacial 6000 enclosure An IP65 remote mounting kit for graphic display terminal Control transformer for 230 V
Emc Filter	Integrated
Network Number Of Phases	3 phases
Rated Supply Voltage	690 V +/- 10 %
Supply Voltage Limits	621...759 V
Supply Frequency	50...60 Hz +/- 5 %
Network Frequency	47.5...63 Hz
Motor Power Kw	1200 kW, 3 phases at 690 V
Line Current	1209 A for 690 V / 1200 kW

### Complementary

Apparent Power	1445 kVA for 690 V / 1200 kW
Prospective Line Isc	100 kA with external fuses
Continuous Output Current	1260 A at 2.5 kHz, 690 V / 1200 kW
Maximum Transient Current	1890 A for 60 s / 1200 kW
Speed Drive Output Frequency	0.1...500 Hz
Nominal Switching Frequency	2.5 kHz
Switching Frequency	2...4.9 kHz adjustable 2.5...4.9 kHz with derating factor

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Speed Range</b>	1...100 for asynchronous motor in open-loop mode, without speed feedback 1...50 for synchronous motor in open-loop mode, without speed feedback 1...1000 for asynchronous motor in closed-loop mode with encoder feedback
<b>Speed Accuracy</b>	+/- 0.01 % of nominal speed in closed-loop mode with encoder feedback 0.2 Tn to Tn +/- 10 % of nominal slip without speed feedback 0.2 Tn to Tn
<b>Torque Accuracy</b>	+/- 5 % in closed-loop mode with encoder feedback +/- 15 % in open-loop mode, without speed feedback
<b>Transient Overtorque</b>	170 % of nominal motor torque for 60 s 220 % of nominal motor torque for 2 s
<b>Braking Torque</b>	30 % without braking resistor ≤ 150 % with braking or hoist resistor
<b>Asynchronous Motor Control Profile</b>	Voltage/frequency ratio, 5 points Flux vector control without sensor, standard Flux vector control without sensor, 2 points Flux vector control with sensor, standard Voltage/frequency ratio - Energy Saving, quadratic U/f Voltage/frequency ratio, 2 points Flux vector control without sensor, ENA (energy Adaptation) system
<b>Synchronous Motor Control Profile</b>	Vector control without sensor, standard Vector control with sensor, standard
<b>Regulation Loop</b>	Adjustable PI regulator
<b>Motor Slip Compensation</b>	Not available in voltage/frequency ratio (2 or 5 points) Adjustable Suppressable Automatic whatever the load
<b>Overvoltage Category</b>	Class 3 conforming to EN 50178
<b>Local Signalling</b>	LCD display unit for operation function, status and configuration - mounted in the front door
<b>Output Voltage</b>	≤ supply voltage
<b>Isolation</b>	Electrical between power and control
<b>Type Of Cable For External Connection</b>	IEC cable at 40 °C, copper 70 °C / PVC UL 508 cable at 40 °C, copper 75 °C / PVC
<b>Electrical Connection</b>	Terminal - 2.5 mm <sup>2</sup> / AWG 14 (R1A, R1B, R1C, R2A, R2B) bottom entry Screw clamp terminals - 1.5 mm <sup>2</sup> (AI1-/AI1+, AI2, AO1, LI1...LI6, PWR) bottom entry Bar M12 - 16 x 240 mm <sup>2</sup> (L1/R, L2/S, L3/T) bottom entry at 6-pulse operation Bar M12 - 8 x 240 mm <sup>2</sup> (L1/R, L2/S, L3/T) bottom entry at 12-pulse operation Bar M12 - 24 x 240 mm <sup>2</sup> (U/T1, V/T2, W/T3) bottom entry
<b>Motor Recommended Cable Cross Section</b>	6 (3 x 185) mm <sup>2</sup> 5 (3 x 240) mm <sup>2</sup>
<b>Short-Circuit Protection</b>	2000 A fuse protection type gI - power supply upstream - at 6-pulse operation 1000 A fuse protection type gI - power supply upstream - at 12-pulse operation
<b>Supply</b>	External supply: 24 V DC (19...30 V), <1 A Internal supply for reference potentiometer: 10 V DC (10...11 V), <10 mA Internal supply: 24 V DC (21...27 V), <100 mA
<b>Analogue Input Number</b>	2
<b>Analogue Input Type</b>	AI2 software-configurable voltage: 0...10 V DC, 24 V max, impedance: 30000 Ohm, sampling time: 1.5...2.5 ms, resolution: 11 bits AI1-/AI1+ bipolar differential voltage: +/- 10 V DC, 24 V max, sampling time: 1.5...2.5 ms, resolution: 11 bits + sign AI2 software-configurable current: 0...20 mA/4...20 mA, impedance: 250 Ohm, sampling time: 1.5...2.5 ms, resolution: 11 bits
<b>Analogue Output Number</b>	1
<b>Analogue Output Type</b>	Software-configurable voltage: (AO1) 0...10 V DC - 470 Ohm - sampling time: 1.5...2.5 ms - resolution: 10 bits Software-configurable current: (AO1) 0...20 mA/4...20 mA - 500 Ohm - sampling time: 1.5...2.5 ms - resolution: 10 bits
<b>Discrete Output Number</b>	2

<b>Discrete Output Type</b>	Configurable relay logic: (R1A, R1B, R1C)NO/NC - 6.5...7.5 ms - 100000 cycles Configurable relay logic: (R2A, R2B)NO - 6.5...7.5 ms - 100000 cycles
<b>Minimum Switching Current</b>	3 mA at 24 V DC (configurable relay logic)
<b>Maximum Switching Current</b>	5 A at 250 V AC on resistive load - $\cos \phi = 1$ (R1, R2) 5 A at 30 V DC on resistive load - L/R = 0 ms (R1, R2) 2 A at 250 V AC on inductive load - $\cos \phi = 0.4$ (R1, R2) 2 A at 30 V DC on inductive load - L/R = 7 ms
<b>Discrete Input Number</b>	7
<b>Discrete Input Type</b>	Programmable (LI1...LI5) at 24 V DC $\leq 30$ V level 1 PLC 3.5 kOhm (duration=1.5...2.5 ms) Switch-configurable (LI6) at 24 V DC $\leq 30$ V level 1 PLC 1.5 kOhm (duration=1.5...2.5 ms) Safety input (PWR) at 24 V DC $\leq 30$ V 1.5 kOhm
<b>Discrete Input Logic</b>	Positive logic (source) (LI1...LI5), 0...5 V (state 0), 11...30 V (state 1) Negative logic (sink) (LI1...LI5), 16...30 V (state 0), 0...10 V (state 1) Positive logic (source) (PWR), 0...2 V (state 0), 17...30 V (state 1)
<b>Acceleration And Deceleration Ramps</b>	Linear adjustable separately from 0.01 to 9000 s S, U or customized
<b>Braking To Standstill</b>	By DC injection
<b>Protection Type</b>	Overheating protection: drive Thermal protection: drive Short-circuit between motor phases: drive Input phase breaks: drive Overcurrent between output phases and earth: drive Overvoltages on the DC bus: drive Break on the control circuit: drive Against exceeding limit speed: drive Line supply undervoltage: drive Line supply overvoltage: drive Against input phase loss: drive Thermal protection: motor Motor phase break: motor Power removal: motor
<b>Dielectric Strength</b>	3535 V DC between earth and power terminals 5092 V DC between control and power terminals
<b>Insulation Resistance</b>	> 1 mOhm 500 V DC for 1 minute to earth
<b>Frequency Resolution</b>	Display unit: 0.1 Hz Analog input: 0.024/50 Hz
<b>Communication Port Protocol</b>	CANopen Modbus
<b>Connector Type</b>	1 RJ45 (on front face) for Modbus 1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen
<b>Physical Interface</b>	2-wire RS 485 for Modbus
<b>Transmission Frame</b>	RTU for Modbus
<b>Transmission Rate</b>	9600 bps, 19200 bps for Modbus on front face 4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen
<b>Data Format</b>	8 bits, 1 stop, even parity for Modbus on front face 8 bits, odd even or no configurable parity for Modbus on terminal
<b>Type Of Polarization</b>	No impedance for Modbus
<b>Number Of Addresses</b>	1...247 for Modbus 1...127 for CANopen
<b>Method Of Access</b>	Slave CANopen

Option Card	Communication card for Modbus TCP/IP Communication card for Fipio Communication card for Modbus/Uni-Telway Communication card for Modbus Plus Communication card for EtherNet/IP Communication card for DeviceNet Communication card for Profibus DP Communication card for Profibus DP V1 Communication card for Interbus-S Communication card for CC-Link Basic I/O extension card Extended I/O extension card Controller inside programmable card Encoder interface cards
Options For Enclosure Configuration	Safe standstill for power circuit PTC relay for power circuit Pt100 relay for power circuit Insulation monitoring for power circuit Design for IT networks for power circuit External 230 V supply terminals for power circuit Buffer voltage 24 V DC power supply for power circuit External 24 V DC supply terminals for power circuit Enclosure lighting for power circuit Key switch (local/remote) for power circuit Motor heating for power circuit External motor fan for power circuit Voltmeter for power circuit Door handle for main switch for power circuit Circuit breaker for power circuit Line contactor for power circuit 12-pulse supply for power circuit Line reactor for power circuit Ammeter for power circuit Enclosure heating for power circuit Motor choke for power circuit Cable entry via the top for power circuit Enclosure plinth for power circuit Door handle for circuit breaker for power circuit Control terminals for control circuit Adaptor for 115 V logic inputs for control circuit Relay output C/O for control circuit Isolated amplifier for control circuit
Operating Position	Vertical +/- 10 degree
Colour Of Enclosure	Light grey (RAL 7035)
Colour Of Base Of Enclosure	Dark grey (RAL 7022)
Height	2009 mm
Width	3400 mm
Depth	642 mm
Net Weight	1925 kg

## Environment

Electromagnetic Compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 $\mu$ s - 8/20 $\mu$ s surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11
Pollution Degree	3 conforming to EN/IEC 61800-5-1
Ip Degree Of Protection	IP54
Vibration Resistance	1.5 mm peak to peak (f= 3...10 Hz) conforming to EN/IEC 60068-2-6 0.6 gn (f= 10...200 Hz) conforming to EN/IEC 60068-2-6 3M3 conforming to EN/IEC 60721-3-3
Shock Resistance	4 gn for 11 ms conforming to EN/IEC 60068-2-27 3M2 conforming to EN/IEC 60721-3-3

Noise Level	79 dB conforming to 86/188/EEC
Environmental Characteristic	Without condensation: 3C2 conforming to IEC 60721-3-3 Without condensation: 3S2 conforming to IEC 60721-3-3 Without condensation: 3K3 conforming to IEC 60721-3-3
Relative Humidity	0...95 %
Ambient Air Temperature For Operation	0...40 °C (without derating) 40...50 °C (with current derating of 1.2 % per °C)
Ambient Air Temperature For Storage	-25...70 °C
Volume Of Cooling Air	11000 m3/h
Operating Altitude	<= 1000 m without derating 1000...3000 m with current derating 1 % per 100 m
Standards	EN/IEC 61800-5-1 EN/IEC 61800-3 EN 61800-3 environments 2 category C3 EN 55011 class A group 2 EN 61800-3 environments 1 category C3
Product Certifications	GOST ATEX
Marking	CE

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	200.0 cm
Package 1 Width	66.0 cm
Package 1 Length	344.0 cm
Package 1 Weight	1920.0 kg


## Contractual warranty

Warranty	18 months
----------	-----------

Dimensions Drawings

IP 23 Floor-Standing Enclosure with Separate Air Flows

Dimensions

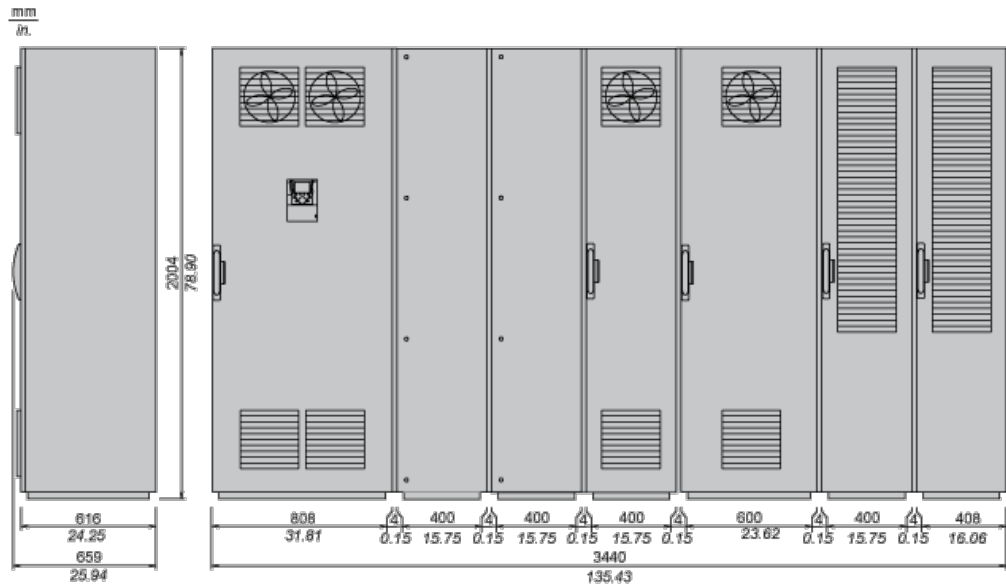


NOTE: For each floor-standing enclosure added, allow a 4 mm/0.15 in. space for the seal.

Connections and Schema


Floor-Standing Enclosure with Separate Air Flows

Standard 6-pulse Design

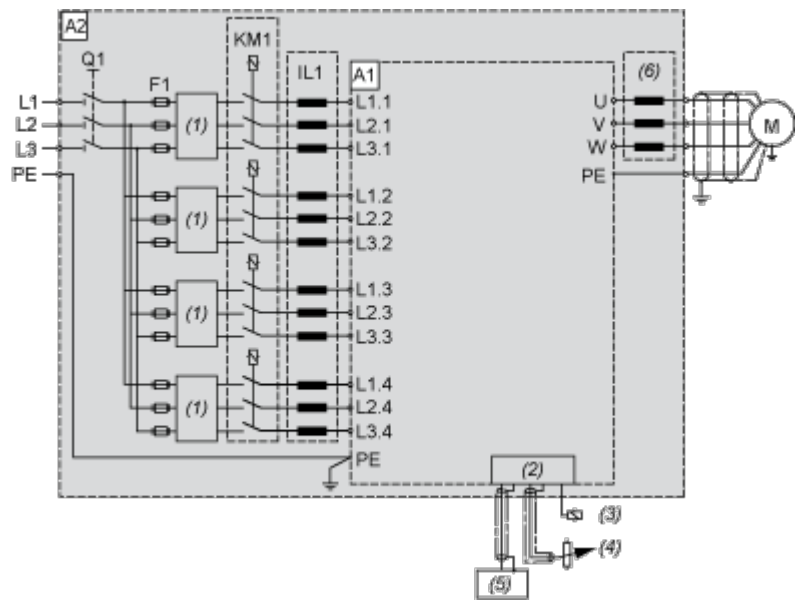

- A1 Drive
- A2 Enclosure
- F1 Fuses
- IL1 Optional line choke
- KM1 Optional line contactor
- M Motor
- Q1 Switch
- (1) Filter
- (2) Control
- (3) Relay control
- (4) Reference potentiometer
- (5) PLC
- (6) Optional motor choke

Optional 12-pulse Design

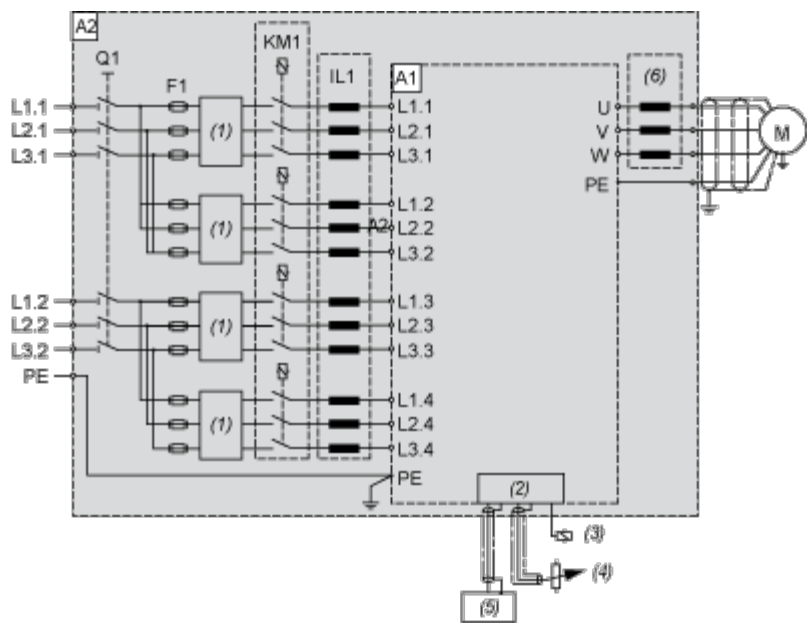

- A1 Drive
- A2 Enclosure
- F1 Fuses
- IL1 Optional line choke
- KM1 Optional line contactor
- M Motor
- Q1 Switch
- (1) Filter
- (2) Control
- (3) Relay control
- (4) Reference potentiometer
- (5) PLC
- (6) Optional motor choke




Performance Curves

IP 23 Floor-Standing Enclosure with Separate Air Flows

Derating Curves

The derating curves for the drive nominal current (In) are dependent on the temperature and switching frequency. For intermediate temperatures, interpolate between 2 curves.

NOTE: The drive will reduce the switching frequency automatically in the event of excessive temperature rise.

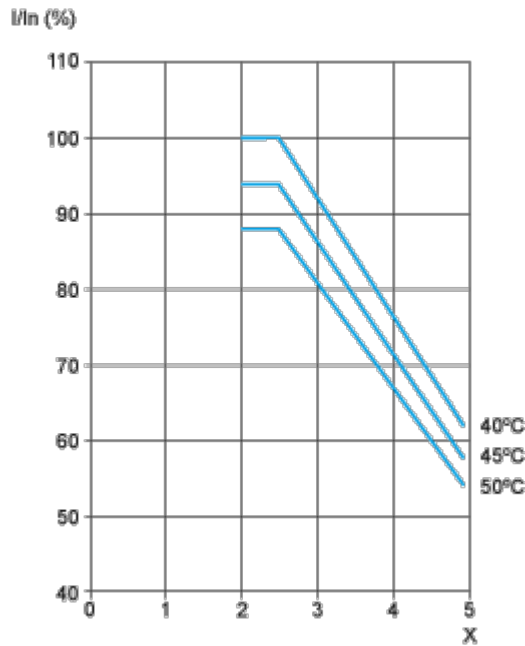

X Switching frequency (kHz)

NOTE: The temperatures shown correspond to the temperature of the air entering the enclosure.