

# Product data sheet

Specifications



## enclosed variable speed drive ATV71 Plus - 500 kW - 400 V - IP54

ATV71EXC5C50N4

⚠ Discontinued on: Mar 12, 2021

⚠ To be end-of-service on: Dec 31, 2028

⚠ Discontinued - Service only

### Main

Range Of Product	Altivar 71 Plus
Product Or Component Type	Variable speed drive
Device Short Name	ATV71 Plus
Product Destination	Synchronous motors Asynchronous motors
Product Specific Application	Complex, high-power machines
Assembly Style	In floor-standing enclosure compact version
Product Composition	An IP65 remote mounting kit for graphic display terminal A line choke ATV71HC50N4D drive on heatsink A wired ready-assembled Sarel Spacial 6000 enclosure A switch and fast-acting semi-conductor fuses Terminals/bars for motor connection
Emc Filter	Integrated
Network Number Of Phases	3 phases
Rated Supply Voltage	380...415 V +/- 10 %
Supply Voltage Limits	342...457 V
Supply Frequency	50...60 Hz +/- 5 %
Network Frequency	47.5...63 Hz
Motor Power Kw	500 kW at 380...415 V
Line Current	834 A for 400 V / 500 kW

### Complementary

Apparent Power	577 kVA for 400 V / 500 kW
Prospective Line Isc	100 kA with external fuses
Continuous Output Current	941 A at 2.5 kHz, 400 V / 500 kW
Maximum Transient Current	1411 A for 60 s / 500 kW
Speed Drive Output Frequency	0...500 Hz
Nominal Switching Frequency	2.5 kHz
Switching Frequency	2.5...8 kHz with derating factor 2...8 kHz adjustable
Speed Range	1...100 in open-loop mode, without speed feedback
Speed Accuracy	+/- 0.01 % of nominal speed in closed-loop mode with encoder feedback 0.2 Tn to Tn +/- 10 % of nominal slip without speed feedback 0.2 Tn to Tn

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Torque Accuracy</b>	+/- 15 % in open-loop mode, without speed feedback +/- 5 % in closed-loop mode with encoder feedback
<b>Transient Overtorque</b>	170 % of nominal motor torque +/- 10 % for 60 s 220 % of nominal motor torque +/- 10 % for 2 s
<b>Braking Torque</b>	<= 150 % with braking or hoist resistor 30 % without braking resistor
<b>Asynchronous Motor Control Profile</b>	Voltage/frequency ratio, 5 points Flux vector control without sensor, standard Flux vector control without sensor, ENA (energy Adaptation) system Flux vector control without sensor, 2 points Voltage/frequency ratio, 2 points Voltage/frequency ratio - Energy Saving, quadratic U/f Flux vector control with sensor, standard
<b>Synchronous Motor Control Profile</b>	Vector control without sensor, standard Vector control with sensor, standard
<b>Regulation Loop</b>	Adjustable PI regulator
<b>Motor Slip Compensation</b>	Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Adjustable Suppressable
<b>Overvoltage Category</b>	Class 3 conforming to EN 50178
<b>Local Signalling</b>	LCD display unit for operation function, status and configuration - mounted in the front door
<b>Output Voltage</b>	<= power supply voltage
<b>Isolation</b>	Electrical between power and control
<b>Type Of Cable For External Connection</b>	IEC cable at 40 °C, copper 70 °C / PVC
<b>Electrical Connection</b>	Terminal - 2.5 mm <sup>2</sup> / AWG 14 (AI1-/AI1+, AI2, AO1, R1A, R1B, R1C, R2A, R2B, LI1...LI6, PWR) entry from the bottom Bar M12 - 6 x 300 mm <sup>2</sup> (L1/R, L2/S, L3/T) entry from the bottom Bar M12 - 6 x 240 mm <sup>2</sup> (U/T1, V/T2, W/T3) entry from the bottom
<b>Motor Recommended Cable Cross Section</b>	4 (3 x 185) mm <sup>2</sup>
<b>Short-Circuit Protection</b>	1250 A fuse protection type gI - power supply upstream
<b>Supply</b>	External supply: 24 V DC (19...30 V), <1 A Internal supply for reference potentiometer: 10 V DC (10...11 V), <10 mA Internal supply: 24 V DC (21...27 V), <100 mA
<b>Analogue Input Number</b>	2
<b>Analogue Input Type</b>	AI2 software-configurable voltage: 0...10 V DC, 24 V max, impedance: 30000 Ohm, sampling time: 1.5...2.5 ms, resolution: 11 bits AI1-/AI1+ bipolar differential voltage: +/- 10 V DC, 24 V max, sampling time: 1.5...2.5 ms, resolution: 11 bits + sign AI2 software-configurable current: 0...20 mA/4...20 mA, impedance: 250 Ohm, sampling time: 1.5...2.5 ms, resolution: 11 bits
<b>Analogue Output Number</b>	1
<b>Analogue Output Type</b>	Software-configurable voltage: (AO1) 0...10 V DC - 470 Ohm - sampling time: 1.5...2.5 ms - resolution: 10 bits Software-configurable current: (AO1) 0...20 mA/4...20 mA - 500 Ohm - sampling time: 1.5...2.5 ms - resolution: 10 bits
<b>Discrete Output Number</b>	2
<b>Discrete Output Type</b>	Configurable relay logic: (R1A, R1B, R1C)NO/NC - 6.5...7.5 ms - 100000 cycles Configurable relay logic: (R2A, R2B)NO - 6.5...7.5 ms - 100000 cycles
<b>Minimum Switching Current</b>	3 mA at 24 V DC (configurable relay logic)
<b>Maximum Switching Current</b>	5 A at 250 V AC on resistive load - cos phi = 1 (R1, R2) 5 A at 30 V DC on resistive load - L/R = 0 ms (R1, R2) 2 A at 250 V AC on inductive load - cos phi = 0.4 (R1, R2) 2 A at 30 V DC on inductive load - L/R = 7 ms (R1, R2)

Discrete Input Number	7
Discrete Input Type	Programmable (LI1...LI5) at 24 V DC <= 30 V level 1 PLC 3.5 kOhm (duration=1.5... 2.5 ms) Switch-configurable (LI6) at 24 V DC <= 30 V level 1 PLC 1.5 kOhm (duration=1.5... 2.5 ms) Safety input (PWR) at 24 V DC <= 30 V 1.5 kOhm
Discrete Input Logic	Positive logic (source) (LI1...LI6), 0...5 V (state 0), 11...30 V (state 1) Negative logic (sink) (LI1...LI6), 16...30 V (state 0), 0...10 V (state 1) Positive logic (source) (PWR), 0...2 V (state 0), 17...30 V (state 1)
Acceleration And Deceleration Ramps	Linear adjustable separately from 0.01 to 9000 s S, U or customized Automatic adaptation of ramp if braking capacity exceeded, by using resistor
Braking To Standstill	By DC injection
Protection Type	Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Short-circuit between motor phases: drive Thermal protection: drive Input phase breaks: motor Power removal: motor Thermal protection: motor
Dielectric Strength	3535 V DC between earth and power terminals 5092 V DC between control and power terminals
Insulation Resistance	> 1 mOhm 500 V DC for 1 minute to earth
Frequency Resolution	Analog input: 0.024/50 Hz Display unit: 0.1 Hz
Communication Port Protocol	CANopen Modbus
Connector Type	1 RJ45 (on front face) for Modbus 1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen
Physical Interface	2-wire RS 485 for Modbus
Transmission Frame	RTU for Modbus
Transmission Rate	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 9600 bps, 19200 bps for Modbus on front face 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen
Data Format	8 bits, 1 stop, even parity for Modbus on front face 8 bits, odd even or no configurable parity for Modbus on terminal
Type Of Polarization	No impedance for Modbus
Number Of Addresses	1...247 for CANopen 1...247 for Modbus
Method Of Access	Slave CANopen
Option Card	Communication card for CC-Link Communication card for DeviceNet Communication card for EtherNet/IP Communication card for Fipio Communication card for Interbus-S Communication card for Modbus Plus Communication card for Modbus/Uni-Telway Communication card for Profibus DP Communication card for Profibus DP V1 Communication card for Modbus TCP/IP Controller inside programmable card Basic I/O extension card Extended I/O extension card Encoder interface cards

<b>Options For Enclosure Configuration</b>	Safe standstill for power circuit PTC relay for power circuit Pt100 relay for power circuit Insulation monitoring for power circuit Design for IT networks for power circuit External 230 V supply terminals for power circuit Buffer voltage 24 V DC power supply for power circuit External 24 V DC supply terminals for power circuit Enclosure lighting for power circuit Key switch (local/remote) for power circuit Motor heating for power circuit External motor fan for power circuit Voltmeter for power circuit Door handle for main switch for power circuit Circuit breaker for power circuit Line contactor for power circuit Ammeter for power circuit Enclosure heating for power circuit Motor choke for power circuit Cable entry via the top for power circuit Enclosure plinth for power circuit Braking unit for power circuit Door handle for circuit breaker for power circuit Control terminals for control circuit Adaptor for 115 V logic inputs for control circuit Relay output C/O for control circuit Isolated amplifier for control circuit
<b>Operating Position</b>	Vertical +/- 10 degree
<b>Colour Of Enclosure</b>	Light grey (RAL 7035)
<b>Height</b>	2262 mm
<b>Width</b>	1200 mm
<b>Depth</b>	642 mm
<b>Net Weight</b>	835 kg

## Environment

<b>Electromagnetic Compatibility</b>	1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11
<b>Pollution Degree</b>	3 conforming to EN/IEC 61800-5-1
<b>Ip Degree Of Protection</b>	IP54
<b>Vibration Resistance</b>	0.6 gn (f= 10...200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm (f= 3...10 Hz) conforming to EN/IEC 60068-2-6 3M3 conforming to EN/IEC 60721-3-3
<b>Shock Resistance</b>	4 gn for 11 ms conforming to EN/IEC 60068-2-27 3M2 conforming to EN/IEC 60721-3-3
<b>Noise Level</b>	79 dB conforming to 86/188/EEC
<b>Environmental Characteristic</b>	Without condensation: 3C2 conforming to IEC 60721-3-3 Without condensation: 3K3 conforming to IEC 60721-3-3 Without condensation: 3S2 conforming to IEC 60721-3-3
<b>Relative Humidity</b>	0...95 %
<b>Ambient Air Temperature For Operation</b>	0...40 °C (without derating) 40...50 °C (with current derating of 1.2 % per °C)
<b>Ambient Air Temperature For Storage</b>	-25...70 °C
<b>Volume Of Cooling Air</b>	2400 m3/h
<b>Operating Altitude</b>	<= 1000 m without derating 1000...3000 m with current derating 1 % per 100 m

Standards	EN 55011 class A group 2 EN 61800-3 environments 1 category C3 EN/IEC 61800-5-1 EN/IEC 61800-3 EN 61800-3 environments 2 category C3
Product Certifications	GOST ATEX
Marking	CE

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	216.0 cm
Package 1 Width	66.0 cm
Package 1 Length	101.6 cm
Package 1 Weight	835.0 kg


## Contractual warranty

Warranty	18 months
----------	-----------


Dimensions Drawings

IP 54 Floor-Standing Enclosure Compact Version

Standard Compact Floor-Standing Enclosure

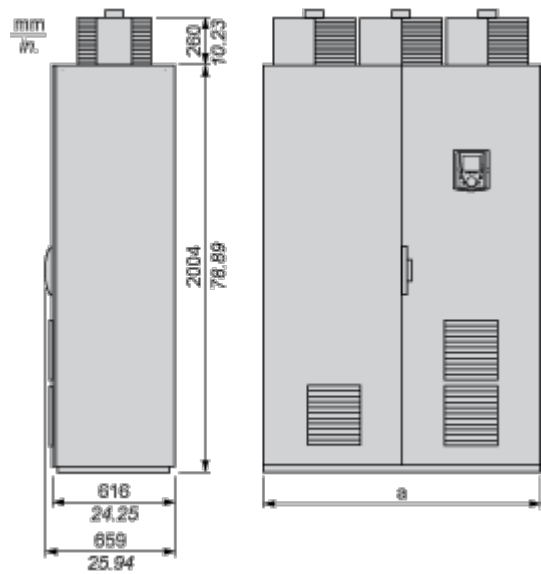

Standard Compact Floor-Standing Enclosure + Additional Floor-Standing Enclosures, According to the Configuration

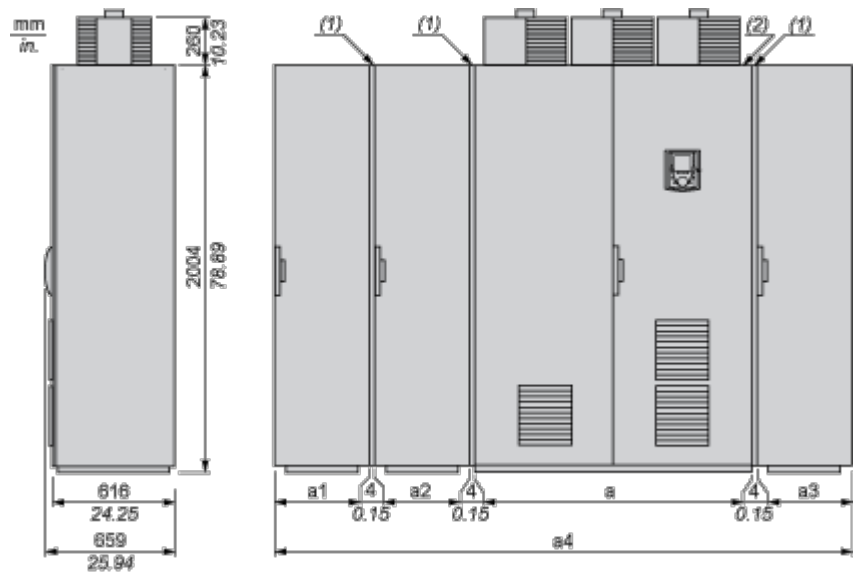

- (1) Seal. For each floor-standing enclosure added, allow a 4 mm/0.15 in. space for the seal.
- (2) Standard IP 54 compact version floor-standing enclosure.

NOTE: The position of the enclosures must be complied with during installation. The number of additional enclosures can vary according to the chosen configuration.

Product data sheet


ATV71EXC5C50N4

Options	a	a1	a2	a3	a4
With or without common options or options (3) dependent on the drive rating	1216 mm/ 47.8 in.	–	–	–	1216 mm/ 47.8 in.
Cable entry via the top option (4)	1200 mm/ 47.2 in.	–	408 mm/ 16 in.	408 mm/ 16 in.	2024 mm/ 79.6 in.
Braking unit option only and/or options (3) dependent on rating	1208 mm/ 47.5 in.	–	408 mm/ 16 in.	–	1620 mm/ 63.7 in.
Braking unit + cable entry via the top options (4)	1200 mm/ 47.2 in.	408 mm/ 16 in.	400 mm/ 15.7 in.	408 mm/ 16 in.	2428 mm/ 95.5 in.
Motor choke option	1208 mm/ 47.5 in.	–	–	408 mm/ 16 in.	1620 mm/ 63.7 in.
Sinus filter option	1208 mm/ 47.5 in.	–	–	608 mm/ 23.9 in.	2020 mm/ 79.5 in.
<p>(3) Except sinus filter option, which requires an additional enclosure. The sinus filter option is not compatible with the cable entry via the top option.</p> <p>(4) The cable entry via the top option is not compatible with the sinus filter option.</p>					

## Connections and Schema

### Floor-Standing Enclosure Compact Version

## Wiring Diagram

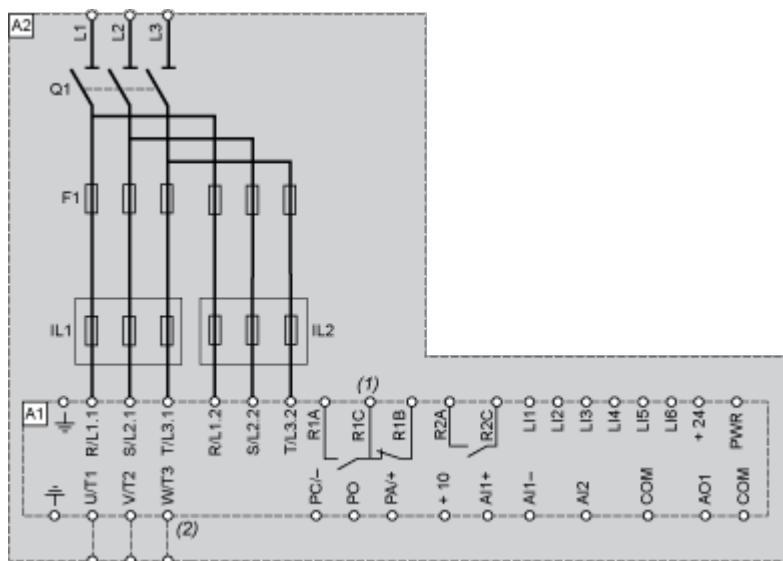

A1 Drive

A2      Enclosure

F1 Fast-acting semi-conductor fuse

IL1, IL2      Line chokes

Q1    Switch

(1) Fault relay contacts. For remote signalling of drive status.

(2) Only for ATV·1EXC····N and ATV·1EXC····Y.




Performance Curves

Ready to Use IP 54 Enclosure

Derating Curves

The derating curves for the drive nominal current (In) are dependent on the temperature and switching frequency. For intermediate temperatures, interpolate between 2 curves.

NOTE: The drive will reduce the switching frequency automatically in the event of excessive temperature rise.

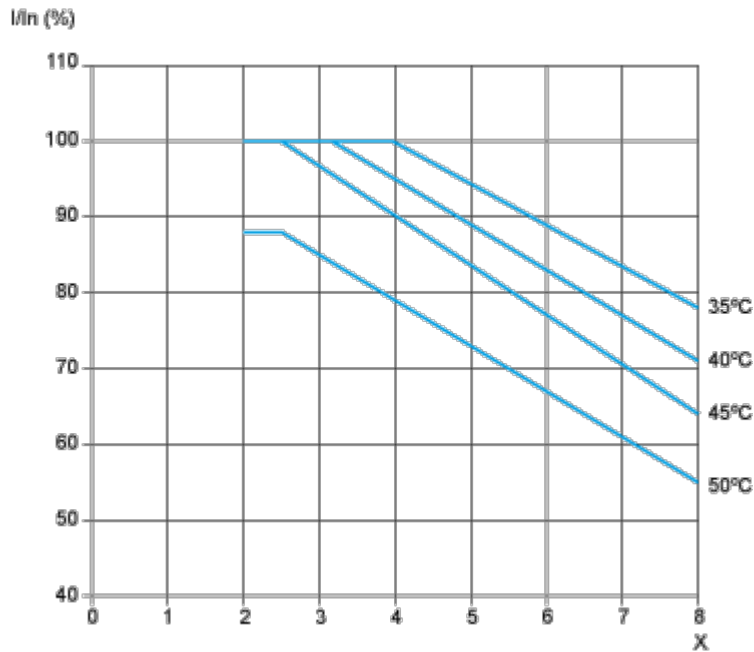

X Switching frequency (kHz)

NOTE: The temperatures shown correspond to the temperature of the air entering the enclosure.