

Product data sheet

Specifications



enclosed variable speed drive ATV71 Plus - 400 kW - 400V - IP54 SA

ATV71EXS5C40N4

⚠ Discontinued - Service only

⚠ Discontinued on: Mar 12, 2021

⚠ To be end-of-service on: Dec 31, 2028

Main

| | |
|------------------------------|---|
| Range Of Product | Altivar 71 Plus |
| Product Or Component Type | Variable speed drive |
| Device Short Name | ATV71 Plus |
| Product Destination | Asynchronous motors Synchronous motors |
| Product Specific Application | Complex, high-power machines |
| Assembly Style | In floor-standing enclosure with separate air flows |
| Product Composition | Terminals/bars for motor connection A plinth A switch and fast-acting semi-conductor fuses An IP65 remote mounting kit for graphic display terminal ATV71HC40N4 drive on heatsink A DC choke A wired ready-assembled Sarel Spacial 6000 enclosure |
| Emc Filter | Integrated |
| Network Number Of Phases | 3 phases |
| Rated Supply Voltage | 380...415 V +/- 10 % |
| Supply Voltage Limits | 342...457 V |
| Supply Frequency | 50...60 Hz +/- 5 % |
| Network Frequency | 47.5...63 Hz |
| Motor Power Kw | 400 kW at 380...415 V |
| Line Current | 675 A for 400 V / 400 kW |

Complementary

| | |
|------------------------------|--|
| Apparent Power | 467 kVA for 400 V / 400 kW |
| Prospective Line Isc | 50 kA with external fuses |
| Continuous Output Current | 759 A at 2.5 kHz, 400 V / 400 kW |
| Maximum Transient Current | 1138 A for 60 s / 400 kW |
| Speed Drive Output Frequency | 0.1...500 Hz |
| Nominal Switching Frequency | 2.5 kHz |
| Switching Frequency | 2.5...8 kHz with derating factor 2...8 kHz adjustable |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|--|--|
| Speed Range | 1...100 for asynchronous motor in open-loop mode, without speed feedback 1...1000 for asynchronous motor in closed-loop mode with encoder feedback 1...50 for synchronous motor in open-loop mode, without speed feedback |
| Speed Accuracy | +/- 0.01 % of nominal speed in closed-loop mode with encoder feedback 0.2 Tn to Tn +/- 10 % of nominal slip without speed feedback 0.2 Tn to Tn |
| Torque Accuracy | +/- 15 % in open-loop mode, without speed feedback +/- 5 % in closed-loop mode with encoder feedback |
| Transient Overtorque | 170 % of nominal motor torque for 60 s 220 % of nominal motor torque for 2 s |
| Braking Torque | <= 150 % with braking or hoist resistor 30 % without braking resistor |
| Asynchronous Motor Control Profile | Voltage/frequency ratio, 5 points Flux vector control with sensor, standard Voltage/frequency ratio, 2 points Flux vector control without sensor, 2 points Flux vector control without sensor, standard Flux vector control without sensor, ENA (energy Adaptation) system Voltage/frequency ratio - Energy Saving, quadratic U/f |
| Synchronous Motor Control Profile | Vector control without sensor, standard Vector control with sensor, standard |
| Regulation Loop | Adjustable PI regulator |
| Motor Slip Compensation | Adjustable Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Suppressable |
| Overvoltage Category | Class 3 conforming to EN 50178 |
| Local Signalling | LCD display unit for operation function, status and configuration - mounted in the front door |
| Output Voltage | <= rated supply voltage |
| Isolation | Electrical between power and control |
| Type Of Cable For External Connection | IEC cable at 40 °C, copper 70 °C / PVC |
| Electrical Connection | Terminal - 2.5 mm ² / AWG 14 (AI1-/AI1+, AI2, AO1, R1A, R1B, R1C, R2A, R2B, LI1...LI6, PWR) bottom entry Bar M12 - 4 x 300 mm ² (L1/R, L2/S, L3/T) bottom entry Bar M12 - 4 x 240 mm ² (U/T1, V/T2, W/T3) bottom entry |
| Motor Recommended Cable Cross Section | 3 (3 x 185) mm ² |
| Short-Circuit Protection | 1000 A fuse protection type gI - power supply upstream |
| Supply | External supply: 24 V DC (19...30 V), <1 A Internal supply for reference potentiometer: 10 V DC (10...11 V), <10 mA Internal supply: 24 V DC (21...27 V), <100 mA |
| Analogue Input Number | 2 |
| Analogue Input Type | AI1-/AI1+ bipolar differential voltage: +/- 10 V DC, 24 V max, sampling time: 1.5...2.5 ms, resolution: 11 bits + sign AI2 software-configurable voltage: 0...10 V DC, impedance: 30000 Ohm, sampling time: 1.5...2.5 ms, resolution: 11 bits AI2 software-configurable current: 0...20 mA, 24 V max, impedance: 250 Ohm, sampling time: 1.5...2.5 ms, resolution: 11 bits |
| Analogue Output Number | 1 |
| Analogue Output Type | Software-configurable voltage: (AO1) 0...10 V DC - 500 Ohm - sampling time: 1.5...2.5 ms - resolution: 10 bits Software-configurable current: (AO1) 0...20 mA/4...20 mA - 470 Ohm - sampling time: 1.5...2.5 ms - resolution: 10 bits |
| Discrete Output Number | 2 |
| Discrete Output Type | Configurable relay logic: (R1A, R1B, R1C)NO/NC - 6.5...7.5 ms - 100000 cycles Configurable relay logic: (R2A, R2B)NO - 6.5...7.5 ms - 100000 cycles |

| | |
|--|---|
| Minimum Switching Current | 3 mA at 24 V DC (configurable relay logic) |
| Maximum Switching Current | 5 A at 250 V AC on resistive load - cos phi = 1 (R1, R2) 5 A at 30 V DC on resistive load - L/R = 0 ms (R1, R2) 2 A at 250 V AC on inductive load - cos phi = 0.4 (R1, R2) 2 A at 30 V DC on inductive load - L/R = 7 ms (R1, R2) |
| Discrete Input Number | 7 |
| Discrete Input Type | Programmable (LI1...LI5) at 24 V DC <= 30 V level 1 PLC 3.5 kOhm (duration=1.5...2.5 ms) Switch-configurable (LI6) at 24 V DC <= 30 V level 1 PLC 1.5 kOhm (duration=1.5...2.5 ms) Safety input (PWR) at 24 V DC <= 30 V 1.5 kOhm |
| Discrete Input Logic | Positive logic (source) (LI1...LI6), 0...5 V (state 0), 11...30 V (state 1) Negative logic (sink) (LI1...LI6), 16...30 V (state 0), 0...10 V (state 1) Positive logic (source) (PWR), 0...2 V (state 0), 17...30 V (state 1) |
| Acceleration And Deceleration Ramps | Linear adjustable separately from 0.01 to 9000 s S, U or customized |
| Braking To Standstill | By DC injection |
| Protection Type | Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor |
| Dielectric Strength | 3535 V DC between earth and power terminals 5092 V DC between control and power terminals |
| Insulation Resistance | > 1 mOhm 500 V DC for 1 minute to earth |
| Frequency Resolution | Analog input: 0.024/50 Hz Display unit: 0.1 Hz |
| Communication Port Protocol | Modbus CANopen |
| Connector Type | 1 RJ45 (on front face) for Modbus 1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen |
| Physical Interface | 2-wire RS 485 for Modbus |
| Transmission Frame | RTU for Modbus |
| Transmission Rate | 4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 9600 bps, 19200 bps for Modbus on front face 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen |
| Data Format | 8 bits, 1 stop, even parity for Modbus on front face 8 bits, odd even or no configurable parity for Modbus on terminal |
| Type Of Polarization | No impedance for Modbus |
| Number Of Addresses | 1...127 for CANopen 1...247 for Modbus |
| Method Of Access | Slave CANopen |

| | |
|-------------|---|
| Option Card | Communication card for CC-Link Communication card for DeviceNet Communication card for EtherNet/IP Communication card for Fipio Communication card for Interbus-S Communication card for Modbus Plus Communication card for Modbus/Uni-Telway Communication card for Profibus DP Communication card for Profibus DP V1 Communication card for Modbus TCP/IP Controller inside programmable card Basic I/O extension card Extended I/O extension card Encoder interface cards |
|-------------|---|

| | |
|-------------------------------------|---|
| Options For Enclosure Configuration | Safe standstill for power circuit PTC relay for power circuit Pt100 relay for power circuit Insulation monitoring for power circuit Design for IT networks for power circuit External 230 V supply terminals for power circuit Buffer voltage 24 V DC power supply for power circuit External 24 V DC supply terminals for power circuit Enclosure lighting for power circuit Key switch (local/remote) for power circuit Motor heating for power circuit External motor fan for power circuit Voltmeter for power circuit Door handle for main switch for power circuit Circuit breaker for power circuit Line contactor for power circuit 12-pulse supply for power circuit Line reactor for power circuit Ammeter for power circuit Enclosure heating for power circuit Motor choke for power circuit Cable entry via the top for power circuit Enclosure plinth for power circuit Braking unit for power circuit Door handle for circuit breaker for power circuit Control terminals for control circuit Adaptor for 115 V logic inputs for control circuit Relay output C/O for control circuit Isolated amplifier for control circuit |
|-------------------------------------|---|

| | |
|-----------------------------|------------------------|
| Operating Position | Vertical +/- 10 degree |
| Colour Of Enclosure | Light grey (RAL 7035) |
| Colour Of Base Of Enclosure | Dark grey (RAL 7022) |
| Height | 2362 mm |
| Width | 1400 mm |
| Depth | 642 mm |
| Net Weight | 765 kg |

Environment

| | |
|-------------------------------|---|
| Electromagnetic Compatibility | 1.2/50 μ s - 8/20 μ s surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11 |
| Pollution Degree | 2 conforming to EN/IEC 61800-5-1 |
| Ip Degree Of Protection | IP54 |
| Vibration Resistance | 0.6 gn (f= 10...200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f= 3...10 Hz) conforming to EN/IEC 60068-2-6 3M3 conforming to EN/IEC 60721-3-3 |

| | |
|---------------------------------------|---|
| Shock Resistance | 4 gn for 11 ms conforming to EN/IEC 60068-2-27 3M2 conforming to EN/IEC 60721-3-3 |
| Noise Level | 73 dB conforming to 86/188/EEC |
| Environmental Characteristic | Without condensation: 3C2 conforming to IEC 60721-3-3 Without condensation: 3K3 conforming to IEC 60721-3-3 Without condensation: 3S2 conforming to IEC 60721-3-3 |
| Relative Humidity | 0...95 % |
| Ambient Air Temperature For Operation | 0...40 °C (without derating) 40...50 °C (with current derating of 1.2 % per °C) |
| Ambient Air Temperature For Storage | -25...70 °C |
| Volume Of Cooling Air | 2300 m3/h |
| Operating Altitude | <= 1000 m without derating 1000...3000 m with current derating 1 % per 100 m |
| Standards | EN/IEC 61800-3 EN/IEC 61800-5-1 EN 61800-3 environments 1 category C3 EN 55011 class A group 2 EN 61800-3 environments 2 category C3 |
| Product Certifications | ATEX GOST |
| Marking | CE |

Packing Units

| | |
|------------------------------|----------|
| Unit Type Of Package 1 | PCE |
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 216.0 cm |
| Package 1 Width | 66.0 cm |
| Package 1 Length | 101.6 cm |
| Package 1 Weight | 765.0 kg |


Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions Drawings

IP 54 Floor-Standing Enclosure with Separate Air Flows

Standard Compact Floor-Standing Enclosure

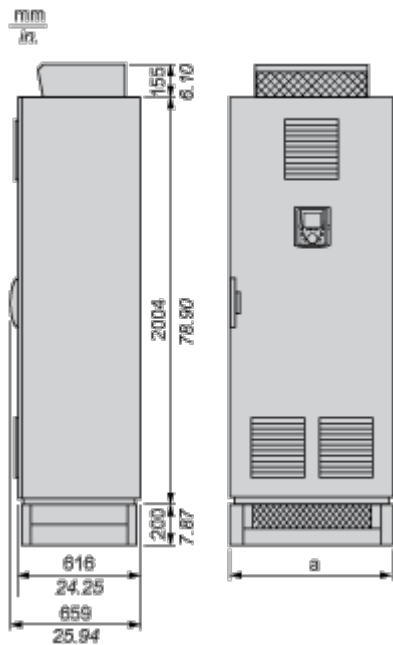

Standard Floor-Standing Enclosure + Additional Enclosures, According to the Configuration

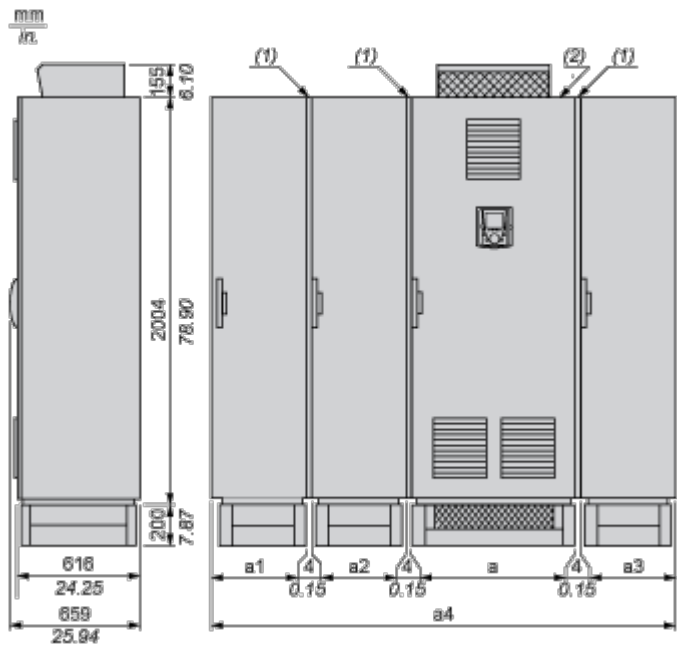

- (1) Seal. For each floor-standing enclosure added, allow a 4 mm/0.15 in. space for the seal.
- (2) Standard version floor-standing enclosure.


NOTE: The position of the enclosures must be complied with during installation. The number of additional enclosures can vary according to the chosen configuration.

| Options | a | a1 | a2 | a3 | a4 |
|---|----------------------|-------------------|---------------------|---------------------|----------------------|
| With or without common options or options (3) dependent on the drive rating | 1008 mm/ 39.6 in. | – | 408 mm/ 16 in. | – | 1420 mm/ 55.9 in. |
| Cable entry via the top option (4) | 1000 mm/ 39.3 in. | – | 408 mm/ 16 in. | 408 mm/ 16 in. | 1824 mm/ 71.8 in. |
| Braking unit option only and/or options (3) dependent on rating | 1008 mm/ 39.6 in. | 408 mm/ 16 in. | 400 mm/ 15.7 in. | – | 1824 mm/ 71.8 in. |
| Braking unit + cable entry via the top options (4) | 1000 mm/ 39.3 in. | 408 mm/ 16 in. | 400 mm/ 15.7 in. | 408 mm/ 16 in. | 2228 mm/ 87.7 in. |
| Motor choke option | 1000 mm/ 39.3 in. | – | 408 mm/ 16 in. | 408 mm/ 16 in. | 1824 mm/ 71.8 in. |
| Sinus filter option | 1000 mm/ 39.3 in. | – | 408 mm/ 16 in. | 808 mm/ 31.8 in. | 2224 mm/ 87.5 in. |
| <p>(3) Except sinus filter option, which requires an additional enclosure. The sinus filter option is not compatible with the cable entry via the top option.</p> <p>(4) The cable entry via the top option is not compatible with the sinus filter option.</p> | | | | | |

Connections and Schema

IP 54 Floor-Standing Enclosure with Separate Air Flows

Wiring Diagram

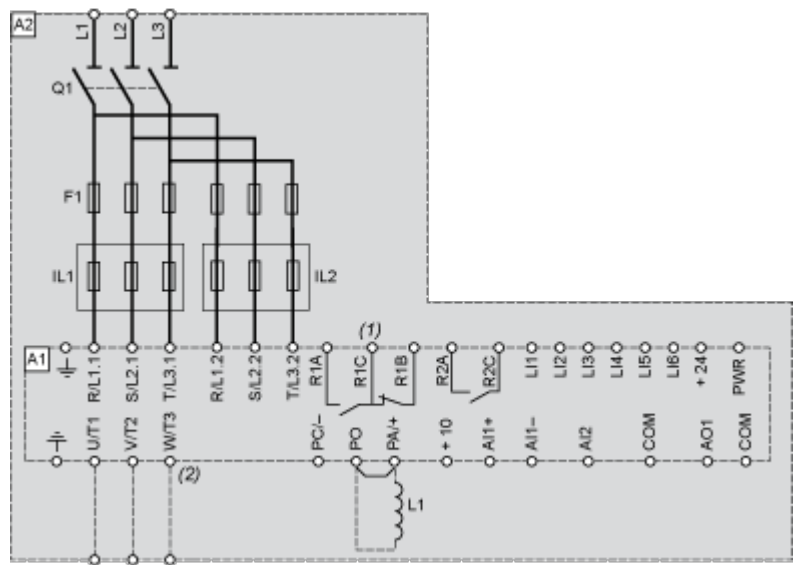

- A1 Drive
- A2 Enclosure
- F1 Fast-acting semi-conductor fuse
- IL1, IL2 Line chokes
- L1 DC choke
- Q1 Switch
- (1) Fault relay contacts. For remote signalling of drive status.
- (2) Only for ATV•1EXS5•••N and ATV•1EXS5•••Y.


Performance Curves

Ready to Use IP 54 Enclosure

Derating Curves

The derating curves for the drive nominal current (In) are dependent on the temperature and switching frequency. For intermediate temperatures, interpolate between 2 curves.

NOTE: The drive will reduce the switching frequency automatically in the event of excessive temperature rise.

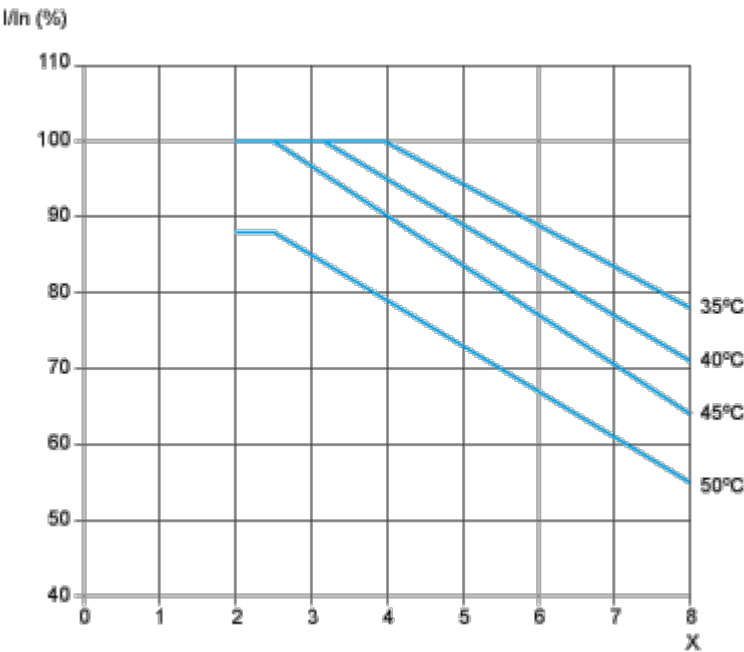

X Switching frequency (kHz)

NOTE: The temperatures shown correspond to the temperature of the air entering the enclosure.