Specifications



servo motor BMI 3-phase untapped IP65 single turn - 131072 p/t - brake

BMI1002P21F

Main

Range Compatibility	Lexium 32i
Product Or Component Type	Servo motor with power stage
Device Short Name	BMI

Complementary

Complementary	
Maximum Mechanical Speed	6000 rpm
[Us] Rated Supply Voltage	208480 V - 1510 %
Supply Voltage Limits	208480 V
Network Number Of Phases	Three phase
Supply Frequency	50/60 Hz - 55 %
Network Frequency Limits	47.563 Hz
Emc Filter	Integrated
Continuous Output Current	4 A at 8 kHz
Output Current 3S Peak	12 A at 400 V for 3 s
Continuous Stall Current	4 A
Continuous Stall Torque	6 N.m at 208480 V three phase
Peak Stall Torque	14 N.m at 208 V three phase 14 N.m at 400 V three phase 14 N.m at 480 V three phase
Nominal Output Power	1000 W at 208 V three phase 1900 W at 400 V three phase 1900 W at 480 V three phase
Nominal Torque	5.1 N.m at 400 V three phase 5.4 N.m at 208 V three phase 4.1 N.m at 480 V three phase
Nominal Speed	1900 rpm at 208 V three phase 3800 rpm at 400 V three phase 4700 rpm at 480 V three phase
Maximum Current Irms	17.5 A at 208 V, three phase 17.5 A at 400 V, three phase 17.5 A at 480 V, three phase
Product Compatibility	Drive control unit LXM32i CANopen Drive control unit LXM32i EtherCAT
Shaft End	Untapped
Second Shaft	Without second shaft end
Shaft Diameter	19 mm
Shaft Length	40 mm

Feedback TypeAbsolute single tum SinCos HiperfaceSpeed Feedback Resolution131072 points/turmHolding BrakeWithHolding Torque5.5 N.m holding brakeMounting SupportInternational standard flangeMotor Flange Size100 mmElectrical ConnectionPrinted circuit board connectorTorque Constant1.28 N.m/A at 20 °CBack Emf Constant84.52 V/krpm at 20 °CNumber Of Motor Poles10Rotor Inertia6.77 kg.cm²Stator Resistance2.347 Ohm at 20 °CStator Resistance9.79 mH at 20 °CStator Inductance9.79 mH at 20 °CMaximum Radial Force Fr900 N at 1000 rpm 790 N at 2000 rpm 620 N at 3000		
Holding Brake With Holding Torque 5.5 N.m holding brake Mounting Support International standard flange Motor Flange Size 100 mm Electrical Connection Printed dircuit board connector Torque Constant 1.28 N.m/A at 20 °C Back Emf Constant 84.52 V/krpm at 20 °C Number Of Motor Poles 10 Rotor Inertia 6.77 kg.cm² Stator Resistance 2.347 Ohm at 20 °C Stator Resistance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Resistance 2.347 Ohm at 20 °C Stator Resistance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Resistanco 9.79 mH at 20 °C <	Feedback Type	Absolute single turn SinCos Hiperface
Holding Torque 5.5 N.m holding brake Mounting Support International standard flange Motor Flange Size 100 mm Electrical Connection Printed circuit board connector Torque Constant 1.28 N.m/A at 20 °C Back Emf Constant 84.52 V/krpm at 20 °C Number Of Motor Poles 10 Rotor Inertia 6.77 kg.cm² Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 690 N at 2000 rpm 690 N at 3000 rpm 690 N at 4000 rpm 580 N at 5000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Speed Feedback Resolution	131072 points/turn
Mounting Support International standard flange Motor Flange Size 100 mm Electrical Connection Printed circuit board connector Torque Constant 1.28 N.m/A at 20 °C Back Emf Constant 84.52 V/krpm at 20 °C Number Of Motor Poles 10 Rotor Inertia 6.77 kg.cm² Stator Resistance 2.347 Ohm at 20 °C Stator Resistance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 790 N at 2000 rpm 690 N at 3000 rpm 690 N at 3000 rpm 690 N at 3000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Holding Brake	With
Motor Flange Size 100 mm Electrical Connection Printed circuit board connector Torque Constant 1.28 N.m/A at 20 °C Back Emf Constant 84.52 V/krpm at 20 °C Number Of Motor Poles 10 Rotor Inertia 6.77 kg.cm² Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 790 N at 2000 rpm 690 N at 3000 rpm 520 N at 3000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Holding Torque	5.5 N.m holding brake
Electrical Connection Printed circuit board connector Torque Constant 1.28 N.m/A at 20 °C Back Emf Constant 84.52 V/krpm at 20 °C Number Of Motor Poles 10 Rotor Inertia 6.77 kg.cm ³ Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 790 N at 2000 rpm 680 N at 3000 rpm 620 N at 3000 rpm 620 N at 3000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 262 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Mounting Support	International standard flange
Torque Constant 1.28 N.m/A at 20 °C Back Emf Constant 84.52 V/krpm at 20 °C Number Of Motor Poles 10 Rotor Inertia 6.77 kg.cm² Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 790 N at 2000 rpm 690 N at 3000 rpm 620 N at 3000 rpm 620 N at 3000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Motor Flange Size	100 mm
Back Emf Constant 84.52 V/krpm at 20 °C Number Of Motor Poles 10 Rotor Inertia 6.77 kg.cm² Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 690 N at 3000 rpm 630 N at 3000 rpm 630 N at 3000 rpm 630 N at 3000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Electrical Connection	Printed circuit board connector
Number Of Motor Poles 10 Rotor Inertia 6.77 kg.cm² Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 790 N at 2000 rpm 620 N at 3000 rpm 620 N at 3000 rpm 620 N at 5000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Torque Constant	1.28 N.m/A at 20 °C
Rotor Inertia 6.77 kg.cm² Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 790 N at 2000 rpm 690 N at 3000 rpm 620 N at 3000 rpm 580 N at 5000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Back Emf Constant	84.52 V/krpm at 20 °C
Stator Resistance 2.347 Ohm at 20 °C Stator Inductance 9.79 mH at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 790 N at 2000 rpm 690 N at 2000 rpm 690 N at 4000 rpm 580 N at 5000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Number Of Motor Poles	10
Stator Inductance 9.79 mH at 20 °C Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 790 N at 2000 rpm 690 N at 3000 rpm 620 N at 3000 rpm 620 N at 4000 rpm 580 N at 5000 rpm 620 N at 4000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Rotor Inertia	6.77 kg.cm ²
Stator Electrical Time Constant 4.17 ms at 20 °C Maximum Radial Force Fr 990 N at 1000 rpm 790 N at 2000 rpm 690 N at 3000 rpm 620 N at 4000 rpm 580 N at 5000 rpm Maximum Axial Force Fa 0.2 x Fr Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Stator Resistance	2.347 Ohm at 20 °C
Maximum Radial Force Fr990 N at 1000 rpm 790 N at 2000 rpm 690 N at 2000 rpm 690 N at 3000 rpm 620 N at 4000 rpm 580 N at 5000 rpmMaximum Axial Force Fa0.2 x FrBrake Pull-In Power8 WType Of CoolingNatural convectionLength282 mmNumber Of Motor Stacks2Centring Collar Diameter95 mmCentring Collar Depth3.5 mmNumber Of Mounting Holes4Mumber Of The Mounting115 mm	Stator Inductance	9.79 mH at 20 °C
790 N at 2000 rpm 690 N at 3000 rpm 620 N at 4000 rpm 580 N at 5000 rpmMaximum Axial Force Fa0.2 x FrBrake Pull-In Power8 WType Of CoolingNatural convectionLength282 mmNumber Of Motor Stacks2Centring Collar Diameter95 mmCentring Collar Depth3.5 mmNumber Of Mounting Holes4Mounting Holes Diameter9 mmCircle Diameter Of The Mounting115 mm	Stator Electrical Time Constant	4.17 ms at 20 °C
Brake Pull-In Power 8 W Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Maximum Radial Force Fr	790 N at 2000 rpm 690 N at 3000 rpm 620 N at 4000 rpm
Type Of Cooling Natural convection Length 282 mm Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Maximum Axial Force Fa	0.2 x Fr
Length282 mmNumber Of Motor Stacks2Centring Collar Diameter95 mmCentring Collar Depth3.5 mmNumber Of Mounting Holes4Mounting Holes Diameter9 mmCircle Diameter Of The Mounting115 mm	Brake Pull-In Power	8 W
Number Of Motor Stacks 2 Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Type Of Cooling	Natural convection
Centring Collar Diameter 95 mm Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Length	282 mm
Centring Collar Depth 3.5 mm Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Number Of Motor Stacks	2
Number Of Mounting Holes 4 Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Centring Collar Diameter	95 mm
Mounting Holes Diameter 9 mm Circle Diameter Of The Mounting 115 mm	Centring Collar Depth	3.5 mm
Circle Diameter Of The Mounting 115 mm	Number Of Mounting Holes	4
	Mounting Holes Diameter	9 mm
		115 mm
Distance Shaft Shoulder-Flange 3.5 mm	Distance Shaft Shoulder-Flange	3.5 mm
Distance Shaft Shoulder-Flange 3.5 mm	Holes	

Environment

Ip Degree Of Protection IP65
Packing Units

·	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	25.0 cm
Package 1 Width	18.6 cm
Package 1 Length	55.0 cm
Package 1 Weight	9.5 kg

Contractual warranty

Warranty

18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Eq

Transparency RoHS/REACh

Well-being performance




Certifications & Standards

Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Circularity Profile	End of Life Information		
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov		

Dimensions Drawings

External Dimensions

With Standard Braking Resistor

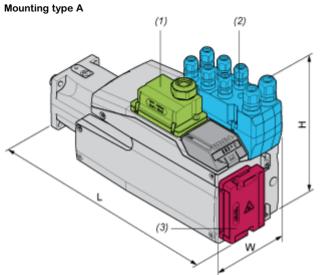

- (1) Module for supply voltage
- (2) I/O module
- (3) Standard braking resistor


Dimensions in mm

W	Н	L	
132,6	217	337	

Dimensions in in.

W	Н	L
5,22	8,54	13,27

Mounting type B

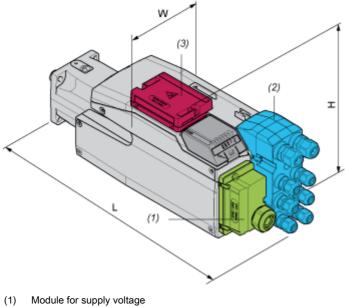


(2) I/O module

(3) Standard braking resistor

Dimensions in mm				
W H L				
132,6	168	386		

Dimensions in in.			
W H L			
5,22	6,61	15,2	

With External Braking Resistor

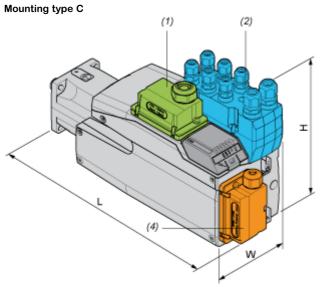

(1) Module for supply voltage

- (2) I/O module
- (4) External braking resistor


Dimensions in mm

W	Н	L	
132,6	217	349	

Dimensions in in.

W	Н	L
5,22	8,54	13,74

Mounting type D

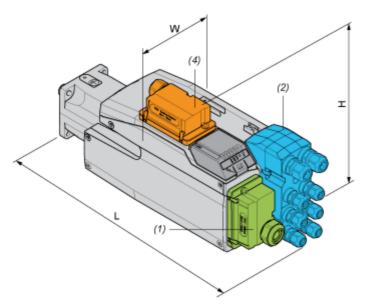

- (1) Module for supply voltage
- (2) I/O module
- (4) External braking resistor


Dimer	nsions	in	mm

W	Н	L
132,6	180	386

Dimensions in in.

W	н	L	
5,22	7,09	15,2	

Mounting type E

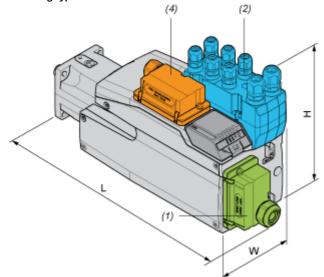


- (1) Module for supply voltage
- (2) I/O module
- (4) External braking resistor

Dimensions in mm

W	Н	L	
132,6	217	376	

Dimensions in in.					
W H L					
5,22	8,54	14,8			

Mounting type F

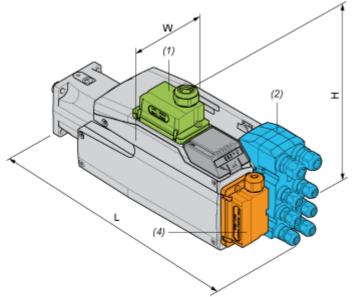

- (1) Module for supply voltage
- (2) I/O module
- (4) External braking resistor

Dimensions in mm

W	Н	L	
132,6	206,5	386	


Dimensions in in.

W	Н	L	
5,22	8,13	15,2	

BMI1002P21F

Performance Curves

Performance Curves

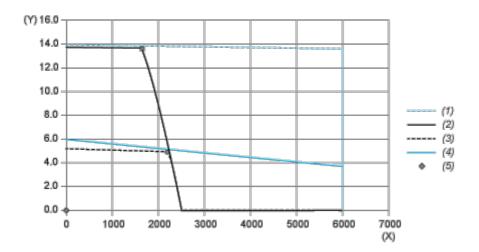


Torque/Speed Curves with 208 V Three Phases Supply Voltage

- (X) Speed (rpm)
- (Y) Torque (N.m)
- (1) Motor peak
- (2) Drive peak
- (3) Drive cont
- (4) Motor cont
- (5) Operating point

		Power	At Speed	With Torque
max. Peak Power		2499 W	1740 rpm	13.72 N.m
max Cont. Power (Drive)	•	1109	2160 rpm	4.90 N.m

Performance Curves

Torque/Speed Curves with 400 V Three Phases Supply Voltage

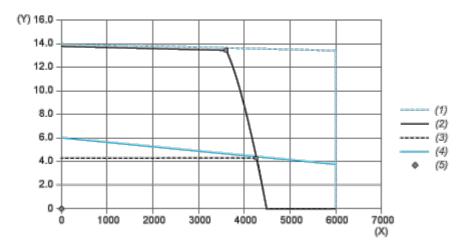


- (X) Speed (rpm)
- (Y) Torque (N.m)
- (1) Motor peak
- (2) Drive peak
- (3) Drive cont
- (4) Motor cont
- (5) Operating point

		Power	At Speed	With Torque
max. Peak Power		5090 W	3600 rpm	13.50 N.m
max Cont. Power (Drive)	•	1954 W	4320 rpm	4.32 N.m

Performance Curves

Torque/Speed Curves with 480 V Three Phases Supply Voltage

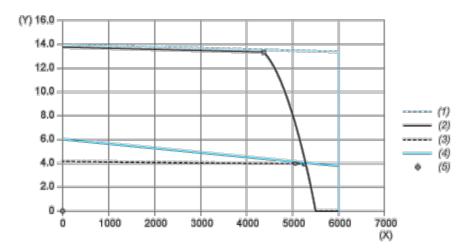

- (X) Speed (rpm)
- (Y) Torque (N.m)
- (1) Motor peak
- (2) Drive peak
- (3) Drive cont
- (4) Motor cont
- (5) Operating point

		Power	At Speed	With Torque
max. Peak Power		6117 W	4380 rpm	13.34 N.m
max Cont. Power (Drive)	•	2080 W	5040 rpm	3.94 N.m