

## integrated drive ILA with servo motor - 24..48 V - DeviceNet - indus connector

ILA2D572TC1F0

- ! Discontinued on: Mar 31, 2023
- ! To be end-of-service on: Dec 31, 2026

#### © Biocontinued Convice City

#### Main

Range Of Product	Lexium integrated drive
Product Or Component Type	Motion integrated drive
Device Short Name	ILA
Motor Type	AC synchronous servo motor
Number Of Motor Poles	6
Network Number Of Phases	Single phase
[Us] Rated Supply Voltage	24 V 48 V
Network Type	DC
Communication Interface	DeviceNet, integrated
Length	209.3 mm
Winding Type	High speed of rotation and medium torque
Electrical Connection	Industrial connector
Holding Brake	With
Gear Box Type	Without
Nominal Speed	3000 rpm at 24 V 5100 rpm at 48 V
Nominal Torque	0.57 N.m
Holding Torque	1.2 N.m holding brake

# Complementary

Transmission Rate	125, 250, 500 kbauds
Mounting Support	Flange
Motor Flange Size	57 mm
Number Of Motor Stacks	2
Centring Collar Diameter	50 mm
Centring Collar Depth	1.6 mm
Number Of Mounting Holes	4
Mounting Holes Diameter	5.2 mm
Circle Diameter Of The Mounting Holes	66.6 mm

Feedback Type	Single turn encoder
Shaft End	Untapped
Second Shaft	Without second shaft end
Shaft Diameter	9 mm
Shaft Length	20 mm
Supply Voltage Limits	1855.2 V
Current Consumption	7500 mA maximum continuous 9000 mA peak
Associated Fuse Rating	16 A
Commissioning Interface	RS485 Modbus TCP (9.6, 19.2 and 38.4 kbauds)
Input/Output Type	4 signals (each be used as input or output)
Voltage State 0 Guaranteed	-34.5 V
Voltage State 1 Guaranteed	1530 V
Discrete Input Current	10 mA at 24 V for safety input 2 mA at 24 V for 24 V signal interface
Discrete Output Voltage	2325 V
Maximum Switching Current	100 mA per output 200 mA total
	200 IIIA (Otal
Protection Type	Short circuit of the output voltage Overload of output voltage Safe torque off
Protection Type  Peak Stall Torque	Short circuit of the output voltage Overload of output voltage
	Short circuit of the output voltage Overload of output voltage Safe torque off
Peak Stall Torque	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m
Peak Stall Torque  Continuous Stall Torque	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m
Peak Stall Torque  Continuous Stall Torque  Speed Feedback Resolution	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m
Peak Stall Torque  Continuous Stall Torque  Speed Feedback Resolution  Accuracy Error	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m  16384 points/turn  +/- 0.05 °
Peak Stall Torque  Continuous Stall Torque  Speed Feedback Resolution  Accuracy Error  Rotor Inertia	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m  16384 points/turn  +/- 0.05 °  0.243 kg.cm²
Peak Stall Torque  Continuous Stall Torque  Speed Feedback Resolution  Accuracy Error  Rotor Inertia  Maximum Radial Force Fr	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m  16384 points/turn  +/- 0.05 °  0.243 kg.cm²  107 N  104 N (force pressure)
Peak Stall Torque  Continuous Stall Torque  Speed Feedback Resolution  Accuracy Error  Rotor Inertia  Maximum Radial Force Fr  Maximum Axial Force Fa	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m  16384 points/turn  +/- 0.05 °  0.243 kg.cm²  107 N  104 N (force pressure) 104 N (tensile force)
Peak Stall Torque  Continuous Stall Torque  Speed Feedback Resolution  Accuracy Error  Rotor Inertia  Maximum Radial Force Fr  Maximum Axial Force Fa  Service Life In Hours	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m  16384 points/turn  +/- 0.05 °  0.243 kg.cm²  107 N  104 N (force pressure) 104 N (tensile force)  20000 h bearing
Peak Stall Torque  Continuous Stall Torque  Speed Feedback Resolution  Accuracy Error  Rotor Inertia  Maximum Radial Force Fr  Maximum Axial Force Fa  Service Life In Hours  Brake Pull-In Power	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m  16384 points/turn  +/- 0.05 °  0.243 kg.cm²  107 N  104 N (force pressure) 104 N (tensile force)  20000 h bearing  10 W
Peak Stall Torque  Continuous Stall Torque  Speed Feedback Resolution  Accuracy Error  Rotor Inertia  Maximum Radial Force Fr  Maximum Axial Force Fa  Service Life In Hours  Brake Pull-In Power  Brake Release Time	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m  16384 points/turn  +/- 0.05 °  0.243 kg.cm²  107 N  104 N (force pressure) 104 N (tensile force)  20000 h bearing  10 W  14 ms
Peak Stall Torque  Continuous Stall Torque  Speed Feedback Resolution  Accuracy Error  Rotor Inertia  Maximum Radial Force Fr  Maximum Axial Force Fa  Service Life In Hours  Brake Pull-In Power  Brake Release Time  Brake Application Time	Short circuit of the output voltage Overload of output voltage Safe torque off  0.85 N.m  0.57 N.m  16384 points/turn  +/- 0.05 °  0.243 kg.cm²  107 N  104 N (force pressure) 104 N (tensile force)  20000 h bearing  10 W  14 ms  13 ms

## **Environment**

Standards	EN/IEC 50178		
	EN/IEC 61800-3		
	IEC 61800-3, Ed 2		
	IEC 60072-1		
	EN 61800-3 : 2001-02		
	EN 50347		
	EN 61800-3:2001, second environment		
Product Certifications	UL		
	cUL		
	TÜV		

Ambient Air Temperature For Operation	4055 °C (with power derating of 2 % per °C) 040 °C (without derating)
Permissible Ambient Air Temperature Around The Device	105 °C power amplifier 110 °C motor
Ambient Air Temperature For Storage	-2570 °C
Operating Altitude	<= 1000 m without derating
Relative Humidity	1585 % without condensation
Vibration Resistance	20 m/s² (f= 10500 Hz) 10 cycles conforming to EN/IEC 60068-2-6
Shock Resistance	150 m/s² 1000 shocks conforming to EN/IEC 60068-2-29
Ip Degree Of Protection	IP41 shaft bushing: conforming to EN/IEC 60034-5 IP54 total except shaft bushing: conforming to EN/IEC 60034-5

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8.0 cm
Package 1 Width	19.0 cm
Package 1 Length	39.0 cm
Package 1 Weight	2.5 kg

# **Contractual warranty**

Warranty 18 months

### **Sustainability**

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

### Well-being performance




#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
<b>Environmental Disclosure</b>	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

#### **Dimensions Drawings**

#### **Integrated Drive with Holding Brake**


#### **Dimensions**

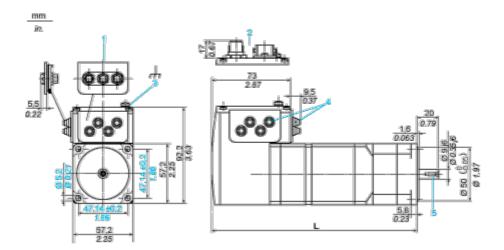

- 1 Accessories: I/O signal insert with industrial connectors
- 2 Option: industrial connectors
- 3 Earth (ground) terminal
- 4 Accessories: cable entries  $\emptyset = 3 \dots 9 \text{ mm}/0.12 \dots 0.35 \text{ in.}$
- 5 Centring hole DIN 332 DS M3
- L 209.3 mm/8.24 in.

Connections and Schema

### Connection Example with 4 I/O Signals

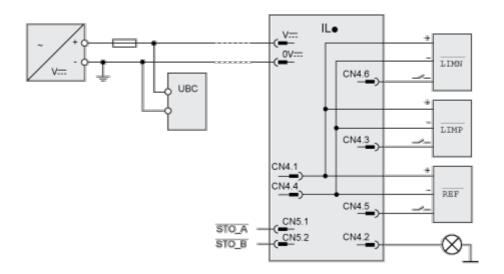


## **Product data sheet**

### ILA2D572TC1F0

#### Performance Curves

### **Torque Characteristics**



- X Speed of rotation in rpm
- Y Torque in Nm
- 1.1 Max. torque at 24 V
- 1.2 Max. torque at 48 V
- 2 Continuous torque