

# TeSys F reversing contactor - 3P(3 NO) AC-3 <= 440 V 225 A 220 V AC 40...400 Hz

LC2F225M7

! To be discontinued on: Jun 30, 2024

#### (!) To be discontinued

## Main

Mani	
Range	TeSys
Product Name	TeSys F
Product Or Component Type	Reversing contactor
Device Short Name	LC2F
Contactor Application	Motor control Resistive load
Utilisation Category	AC-1 AC-3
Device Presentation	Preassembled with reversing power busbar
Poles Description	3P
Power Pole Contact Composition	3 NO
[Ue] Rated Operational Voltage	<= 1000 V AC 50/60 Hz <= 460 V DC
[le] Rated Operational Current	225 A (at <40 °C) at <= 440 V AC AC-3 315 A (at <40 °C) at <= 440 V AC AC-1
Motor Power Kw	100 kW at 1000 V AC 50/60 Hz 110 kW at 380400 V AC 50/60 Hz 110 kW at 415 V AC 50/60 Hz 110 kW at 440 V AC 50/60 Hz 129 kW at 500 V AC 50/60 Hz 63 kW at 220240 V AC 50/60 Hz 129 kW at 660690 V AC 50/60 Hz
Control Circuit Type	AC at 40400 Hz
[Uc] Control Circuit Voltage	220 V AC 40400 Hz
[Uimp] Rated Impulse Withstand Voltage	8 kV
Overvoltage Category	III
[Ith] Conventional Free Air Thermal Current	315 A (at 40 °C)
Irms Rated Making Capacity	2250 A AC conforming to IEC 60947-4-1
Rated Breaking Capacity	1800 A conforming to IEC 60947-4-1
[Icw] Rated Short-Time Withstand Current	1800 A 40 °C - 10 s 1000 A 40 °C - 30 s 850 A 40 °C - 1 min 560 A 40 °C - 3 min 440 A 40 °C - 10 min
Associated Fuse Rating	315 A gG at <= 440 V 250 A aM at <= 440 V
Average Impedance	0.32 mOhm - Ith 315 A 50 Hz

[Ui] Rated Insulation Voltage	1000 V conforming to IEC 60947-4-1 1500 V conforming to VDE 0110 group C
Power Dissipation Per Pole	16 W AC-3
Interlocking Type	Mechanical
Mounting Support	Plate
Standards	IEC 60947-1 EN 60947-1 EN 60947-4-1 IEC 60947-4-1 JIS C8201-4-1
Product Certifications	CB UL LROS (Lloyds register of shipping) RINA DNV CSA CCC RMRoS ABS UKCA
Connections - Terminals	Control circuit: screw clamp terminals 1 cable(s) 14 mm²flexible without cable end Control circuit: screw clamp terminals 2 cable(s) 14 mm²flexible without cable end Control circuit: screw clamp terminals 1 cable(s) 14 mm²flexible with cable end Control circuit: screw clamp terminals 2 cable(s) 12.5 mm²flexible with cable end Control circuit: screw clamp terminals 1 cable(s) 14 mm²solid without cable end Control circuit: screw clamp terminals 2 cable(s) 14 mm²solid without cable end Power circuit: lugs-ring terminals 1 cable(s) 185 mm² Power circuit: connector 1 cable(s) 185 mm² Power circuit: bar 2 cable(s) - busbar cross section: 32 x 4 mm
Tightening Torque	Control circuit: 1.2 N.m Power circuit: 35 N.m
Operating Time	2035 ms closing 715 ms opening
Mechanical Durability	10 Mcycles
Maximum Operating Rate	2400 cyc/h 55 °C
Complementary	
Control Circuit Voltage Limits	Operational: 0.851.1 Uc at 50/60 Hz (at <55 °C) Drop-out: 0.20.55 Uc at 50/60 Hz (at <55 °C)
Inrush Power In Va	805 VA 50 Hz cos phi 0.3 (at 20 °C) 970 VA 60 Hz cos phi 0.3 (at 20 °C)
Hold-In Power Consumption In Va	55 VA 50 Hz cos phi 0.3 (at 20 °C) 66 VA 60 Hz cos phi 0.3 (at 20 °C)
Heat Dissipation	1824 W
Environment	
Ip Degree Of Protection	IP20 front face with shrouds conforming to IEC 60529 IP20 front face with shrouds conforming to VDE 0106
Protective Treatment	тн
Ambient Air Temperature For Operation	-555 °C
Ambient Air Temperature For Storage	-6080 °C
Permissible Ambient Air Temperature Around The Device	-4070 °C

3000 m without derating

Operating Altitude

Mechanical Robustness	Vibrations contactor open: 2 Gn, 5300 Hz Shocks contactor closed: 15 Gn for 11 ms Vibrations contactor closed: 5 Gn, 5300 Hz Shocks contactor open: 7 Gn for 11 ms	
Height	197 mm	
Width	357 mm	
Depth	181 mm	
Net Weight	11.1 kg	

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	22.0 cm
Package 1 Width	36.0 cm
Package 1 Length	53.0 cm
Package 1 Weight	12.353 kg

# **Contractual warranty**

Warranty 18 months

## Sustainability

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance




#### **Certifications & Standards**


Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant with Exemptions
China Rohs Regulation	China RoHS declaration  Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

## **Dimensions Drawings**

#### **Dimensions and Drawings**

Pre-assembled: LC2 F115 to F265 (Reverser supplied on 2 bars which can be used for fixing the device)

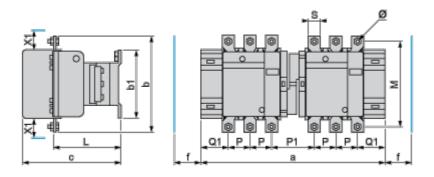

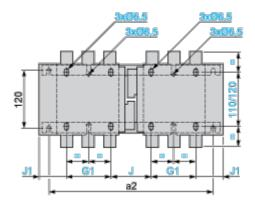

NOTE: Bar fixing centers Vertical: 120 mm, Horizontal: a2 see table.

**NOTE:** X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

LC1	200500 V	6601000 V
F115, F150	10	15
F185	10	15
F225, F265	10	15

LC2		а	a2	b	b1	С	G1	J	J1	L	М	Р	P1	Q1	S	f	Ø
F115	3P	345	317	162	137	171	80	71	57	107	147	37	77	60	20	131	M6
FIIS	4P	419	378	162	137	171	80	108	75.5	107	147	37	77	60	20	131	M6
	3P	345	317	170	137	171	80	71	57	107	150	40	71	57	20	131	M8
F150	4P	422	381	170	137	171	80	111	75.5	107	150	40	71	55.5	20	131	M8


## **Product data sheet**

## LC2F225M7


LC2		а	a2	b	b1	С	G1	J	J1	L	М	Р	P1	Q1	S	f	Ø
F185	3P	357	326	174	137	181	80	78	59.5	113.5	154	40	78	59.5	20	130	M8
	4P	437	390	174	137	181	80	118	79.5	113.5	154	40	78	59.5	20	130	M8
5005	3P	357	326	197	137	181	80	78	59.5	113.5	172	48	62	51.5	25	130	M10
F225	4P	437	390	197	137	181	80	118	79.5	113.5	172	48	54	47.5	25	130	M10
F265	3P	425	386	203	145	213	96	109	61.5	141	178	48	100	66.5	25	147	M10
	4P	521	464	203	145	213	96	157	85.5	141	178	48	100	66.5	25	147	M10

**NOTE:** For customer assembly, fixing recommended on AM1 EC uprights, please consult your Regional Sales Office.

#### 2 x LC1 F115 to F330

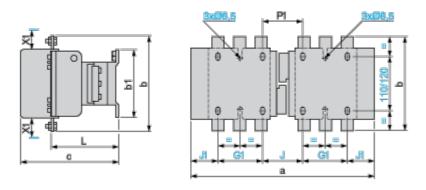

#### 2 x LC1 F400, F500, F630, F800



- (1) Except LC1 F630 and F800: 4 x Ø10.5.
- (2) Except LC1 F630 and F800.

**NOTE:** X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

LC1	200500 V	6601000 V	200690 V	1000 V
F115, F150	10	15	-	_

## Product data sheet

# LC2F225M7


LC1	200500 V	6601000 V	200690 V	1000 V
F185	10	15	-	_
F225, F265	10	15	-	-
F330	10	15	_	-
F400	15	20	_	-
F500	15	20	_	-
F630	20	30	_	-
F800	_	_	10	20

2 x LC	1	а	b	b1	С	G	G1	J	J1	J2	J3	L	P1
<b>5445</b>	3P	345	162	137	171	_	80	71	57	_	_	107	77
F115	4P	419	162	137	171	_	80	108	75.5	-	-	107	77
F150	3P	345	170	137	171	_	80	71	57	_	-	107	71
F150	4P	422	170	137	171	_	80	111	75.5	_	_	107	71
F185	3P	357	174	137	181	_	80	78	59.5	_	-	113.5	78
F105	4P	437	174	137	181	_	80	118	79.5	_	_	113.5	78
F225	3P	357	197	137	181	_	80	78	59.5	_	_	113.5	62
F225	4P	437	197	137	181	_	80	118	79.5	_	_	113.5	54
COSE	3P	425	203	145	213	_	96	109	61.5	_	_	141	100
F265	4P	521	203	145	213	_	96	157	85.5	_	_	141	100
F330	3P	447	206	145	219	_	96	124	65.5	_	_	145	107
F330	4P	543	206	145	219	_	96	172	89.5	_	-	145	107
F400	3P	446	206	209	219	80	170	157	64.5	67	19.5	145	107
F400	4P	542	206	209	219	80	170	157	112.5	67	67.5	145	107
F500	3P	485	238	209	232	80	170	156	84.5	66	39.5	146	112
F500	4P	595	238	209	232	140	230	156	79.5	66	34.5	146	112
E630	3P	636	304	280	255	180	-	139	68.5	-	-	155	137
F630	4P	796	304	280	255	240	-	139	88.5	-	-	155	137
F800	3P	636	304	280	255	180	-	139	68.5	_	-	155	137


Connections and Schema

## **Connections and Schema**


Reversing contactors for motor control LC2 F: 2xLC1 F Horizontally mounted




Reversing contactors for motor control LC2 F: 2xLC1 F Vertically mounted




Changeover contactor pairs for distribution LC2 F: 2xLC1 F Horizontally mounted



Changeover contactor pairs for distribution LC2 F: 2xLC1 F Vertically mounted



Electrical interlocking of reversers fitted with mechanical interlock without integral electrical contacts: LA9 F



## **Product data sheet**

## LC2F225M7

Motor Starter BOM Motor Starter BOM