

# TeSys F - star delta starter - 3 x 3P (3 NO) - 185 A - 220/230 V AC coil

LC3F185M7

! To be discontinued on: Jun 30, 2024

(!) To be discontinued

#### Main

wain	
Range	TeSys
Product Name	TeSys F
Product Or Component Type	Star delta starter
Device Short Name	LC3F
Contactor Application	Motor control
Utilisation Category	AC-3
Device Presentation	Pre-wired
Poles Description	3 x 3P
Power Pole Contact Composition	3 x 3 NO
[Ue] Rated Operational Voltage	Power circuit: <= 1000 V AC 16 Hz 2/3200 Hz
[le] Rated Operational Current	185 A (at <55 °C) at <= 440 V AC AC-3 for power circuit
Motor Power Kw	160 kW at 380/400 V AC 50/60 Hz 160 kW at 415 V AC 50/60 Hz 185 kW at 440 V AC 50/60 Hz 90 kW at 220/230 V AC 50/60 Hz
Control Circuit Type	AC at 50/60 Hz
[Uc] Control Circuit Voltage	220/230 V AC 50/60 Hz
Auxiliary Contact Composition	1 NC for KM1 star contactor 1 NO for KM1 star contactor 2 NC for KM2 line contactor 1 NO for KM2 line contactor 1 NC for KM3 delta contactor 2 NO for KM3 delta contactor
[Uimp] Rated Impulse Withstand Voltage	8 kV
[Ui] Rated Insulation Voltage	1000 V conforming to IEC 60947-4-1 1500 V conforming to VDE 0110 group C
Interlocking Type	Without start delta mechanical interlock
Mounting Support	Plate
Standards	EN 60947-1 EN 60947-4-1 JIS C8201-4-1 IEC 60947-4-1 IEC 60947-1

<b>Product Certifications</b>	СВ
	RMRoS
	RINA
	DNV
	ABS
	CSA
	CCC
	UL
	LROS (Lloyds register of shipping)

## Complementary

Complemental y	
[Ith] Conventional Free Air Thermal Current	275 A 40 °C
Irms Rated Making Capacity	1850 A conforming to IEC 60947-4-1
Rated Breaking Capacity	1480 A conforming to IEC 60947-4-1
[Icw] Rated Short-Time Withstand Current	1500 A 40 °C - 10 s 920 A 40 °C - 30 s 740 A 40 °C - 1 min 500 A 40 °C - 3 min 400 A 40 °C - 10 min
Associated Fuse Rating	315 A gG at <= 440 V 200 A aM at <= 440 V
Connections - Terminals	Power circuit: lugs-ring terminals 1 150 mm²  Power circuit: connector 1 150 mm²  Control circuit: screw clamp terminals 1 14 mm² - cable stiffness: flexible with cable end  Control circuit: screw clamp terminals 2 12.5 mm² - cable stiffness: flexible with cable end  Control circuit: screw clamp terminals 1 14 mm² - cable stiffness: flexible without cable end  Control circuit: screw clamp terminals 2 14 mm² - cable stiffness: flexible without cable end  Control circuit: screw clamp terminals 1 14 mm² - cable stiffness: solid without cable end  Control circuit: screw clamp terminals 1 14 mm² - cable stiffness: solid without cable end  Control circuit: screw clamp terminals 2 14 mm² - cable stiffness: solid without cable end  Power circuit: bar 2 - busbar cross section: 25 x 3 mm  Power circuit: bolted connection
Connections Bolt Diameter	M8
Connections Bolt Diameter  Tightening Torque	M8  Control circuit: 1.2 N.m  Power circuit: 18 N.m
	Control circuit: 1.2 N.m
Tightening Torque	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing
Tightening Torque Operating Time	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing 715 ms opening
Tightening Torque  Operating Time  Mechanical Durability	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing 715 ms opening  10 Mcycles
Tightening Torque  Operating Time  Mechanical Durability  Maximum Operating Rate	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing 715 ms opening  10 Mcycles  2400 cyc/h 55 °C
Tightening Torque  Operating Time  Mechanical Durability  Maximum Operating Rate  Starting Time	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing 715 ms opening  10 Mcycles  2400 cyc/h 55 °C  20 s  Operational: 0.851.1 Uc at 50/60 Hz (at <55 °C)
Tightening Torque  Operating Time  Mechanical Durability  Maximum Operating Rate  Starting Time  Control Circuit Voltage Limits	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing 715 ms opening  10 Mcycles  2400 cyc/h 55 °C  20 s  Operational: 0.851.1 Uc at 50/60 Hz (at <55 °C) Drop-out: 0.350.55 Uc at 50/60 Hz (at <55 °C)  805 VA 50 Hz cos phi 0.3 (at 20 °C)
Tightening Torque  Operating Time  Mechanical Durability  Maximum Operating Rate  Starting Time  Control Circuit Voltage Limits  Inrush Power In Va	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing 715 ms opening  10 Mcycles  2400 cyc/h 55 °C  20 s  Operational: 0.851.1 Uc at 50/60 Hz (at <55 °C) Drop-out: 0.350.55 Uc at 50/60 Hz (at <55 °C)  805 VA 50 Hz cos phi 0.3 (at 20 °C)  55 VA 50 Hz cos phi 0.3 (at 20 °C)
Tightening Torque  Operating Time  Mechanical Durability  Maximum Operating Rate  Starting Time  Control Circuit Voltage Limits  Inrush Power In Va  Hold-In Power Consumption In Va	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing 715 ms opening  10 Mcycles  2400 cyc/h 55 °C  20 s  Operational: 0.851.1 Uc at 50/60 Hz (at <55 °C) Drop-out: 0.350.55 Uc at 50/60 Hz (at <55 °C)  805 VA 50 Hz cos phi 0.3 (at 20 °C)  55 VA 50 Hz cos phi 0.3 (at 20 °C)  66 VA 60 Hz cos phi 0.3 (at 20 °C)
Tightening Torque  Operating Time  Mechanical Durability  Maximum Operating Rate  Starting Time  Control Circuit Voltage Limits  Inrush Power In Va  Hold-In Power Consumption In Va	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing 715 ms opening  10 Mcycles  2400 cyc/h 55 °C  20 s  Operational: 0.851.1 Uc at 50/60 Hz (at <55 °C) Drop-out: 0.350.55 Uc at 50/60 Hz (at <55 °C)  805 VA 50 Hz cos phi 0.3 (at 20 °C) 970 VA 60 Hz cos phi 0.3 (at 20 °C)  55 VA 50 Hz cos phi 0.3 (at 20 °C) 66 VA 60 Hz cos phi 0.3 (at 20 °C) 1824 W
Tightening Torque  Operating Time  Mechanical Durability  Maximum Operating Rate  Starting Time  Control Circuit Voltage Limits  Inrush Power In Va  Hold-In Power Consumption In Va  Heat Dissipation  Width	Control circuit: 1.2 N.m Power circuit: 18 N.m  2035 ms closing 715 ms opening  10 Mcycles  2400 cyc/h 55 °C  20 s  Operational: 0.851.1 Uc at 50/60 Hz (at <55 °C) Drop-out: 0.350.55 Uc at 50/60 Hz (at <55 °C)  805 VA 50 Hz cos phi 0.3 (at 20 °C) 970 VA 60 Hz cos phi 0.3 (at 20 °C) 65 VA 50 Hz cos phi 0.3 (at 20 °C) 66 VA 60 Hz cos phi 0.3 (at 20 °C) 1824 W  525 mm

#### **Environment**

Ip Degree Of Protection	IP20 front face with shrouds conforming to IEC 60529 IP20 front face with shrouds conforming to VDE 0106
Protective Treatment	TH
Ambient Air Temperature For Storage	-6080 °C
Ambient Air Temperature For Operation	-555 °C -4070 °C at Uc
Operating Altitude	3000 m without derating
Mechanical Robustness	Vibrations contactor open: 2 Gn, 5300 Hz Shocks contactor closed: 15 Gn for 11 ms Vibrations contactor closed: 5 Gn, 5300 Hz Shocks contactor open: 7 Gn for 11 ms

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	38.0 cm
Package 1 Width	66.0 cm
Package 1 Length	75.0 cm
Package 1 Weight	24.54 kg

## **Contractual warranty**

Warranty 18 months

#### Sustainability

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

#### Well-being performance

<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes
<b>⊘</b>	Pvc Free	

#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant with Exemptions
China Rohs Regulation	China RoHS declaration  Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information


#### **Dimensions Drawings**


#### **Dimensions and Drawings**

#### **Chassis mounted starters**

Pre-assembled: LC3 F185 to LC3 F400

For customer assembly: 2 x LC1 F••• and 1 x LC1 D150 or 3 x LC1 F•••

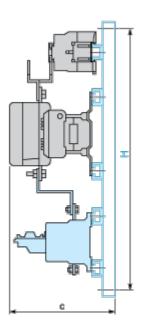

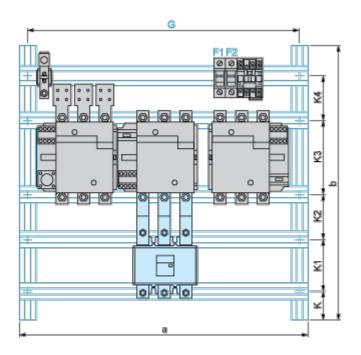

	а	b	С	G	Н	K	K1	K2	K3	K4
LC3 F185 or 2 x LC1 F●●● + 1 x LC1 D with components F185	565	675	235	525	625	160	110	80	110	80
LC3 F225 or 3 x LC1 F●●● with components F225	565	675	235	525	625	160	110	80	110	80

## Product data sheet LC3F185M7

	а	b	С	G	Н	K	K1	K2	K3	K4
LC3 F265 or 3 x LC1 F●●● with components F265	665	775	266	625	725	165	110	100	110	110
LC3 F330 or 3 x LC1 F●●● with components F330	765	975	276	725	825	195	140	100	110	180
LC3 F400 or 3 x LC1 F●●● with components F400	765	975	276	725	925	195	140	100	180	110

### **Product data sheet**

#### LC3F185M7

Motor Starter BOM Motor Starter BOM