

# compact smart relay, Zelio Logic SR2 SR3, 20 IO, 24V DC, clock, display, 8 transistor outputs

SR2B202BD

#### Main

Range Of Product	Zelio Logic
Product Or Component Type	Compact smart relay

## Complementary

Compromentary	
Local Display	With
Number Or Control Scheme Lines	0240 with ladder programming 0500 with FBD programming
Cycle Time	690 ms
Backup Time	10 years at 25 °C
Clock Drift	12 min/year at 055 °C 6 s/month at 25 °C
Checks	Program memory on each power up
[Us] Rated Supply Voltage	24 V DC
Supply Voltage Limits	19.230 V
Maximum Supply Current	100 mA (without extension)
Power Dissipation In W	3 W without extension
Reverse Polarity Protection	With
Discrete Input Number	12 conforming to IEC 61131-2 Type 1
Discrete Input Type	Resistive
Discrete Input Voltage	24 V DC
Discrete Input Current	4 mA
Counting Frequency	1 kHz for discrete input
Voltage State 1 Guaranteed	>= 15 V for I1IA and IHIR discrete input circuit >= 15 V for IBIG used as discrete input circuit
Voltage State 0 Guaranteed	<= 5 V for I1IA and IHIR discrete input circuit <= 5 V for IBIG used as discrete input circuit
Current State 1 Guaranteed	>= 1.2 mA (IBIG used as discrete input circuit) >= 2.2 mA (I1IA and IHIR discrete input circuit)
Current State 0 Guaranteed	<= 0.5 mA (IBIG used as discrete input circuit) <= 0.75 mA (I1IA and IHIR discrete input circuit)
Input Compatibility	3-wire proximity sensors PNP for discrete input
Analogue Input Number	6
Analogue Input Type	Common mode
Analogue Input Range	010 V 024 V

Temperature Probe Type	NTC 10k at 25 °C NTC 1000k at 25 °C KTY81 210/220/221/222/250 Pt 500
Maximum Permissible Voltage	30 V for analogue input circuit
Analogue Input Resolution	8 bits
Lsb Value	39 mV for analogue input circuit
Conversion Time	Smart relay cycle time for analogue input circuit
Conversion Error	+/- 5 % at 25 °C for analogue input circuit +/- 6.2 % at 55 °C for analogue input circuit
Repeat Accuracy	+/- 2 % at 55 °C for analogue input circuit
Operating Distance	10 m between stations, with screened cable (sensor not isolated) for analogue input circuit
Input Impedance	12 kOhm for IBIG used as analogue input circuit 12 kOhm for IBIG used as discrete input circuit 7.4 kOhm for I1IA and IHIR discrete input circuit
Number Of Outputs	8 transistor
Output Voltage	24 V transistor output
Output Voltage Limits	19.230 V DC (transistor output)
Load Current	0.50.625 A transistor output
[Ures] Residual Voltage	2 V at state 1 transistor output
Overload Protection	With overload protection for transistor output
Short-Circuit Protection	With transistor output
Overvoltage Protection	With overvoltage protection for transistor output
Clock	With
Response Time	<= 1 ms (from state 0 to state 1) for transistor output <= 1 ms (from state 1 to state 0) for transistor output
Connections - Terminals	Screw terminals, 1 x 0.21 x 2.5 mm² (AWG 25AWG 14) semi-solid Screw terminals, 1 x 0.21 x 2.5 mm² (AWG 25AWG 14) solid Screw terminals, 1 x 0.251 x 2.5 mm² (AWG 24AWG 14) flexible with cable end Screw terminals, 2 x 0.22 x 1.5 mm² (AWG 24AWG 16) solid Screw terminals, 2 x 0.252 x 0.75 mm² (AWG 24AWG 18) flexible with cable end
Tightening Torque	0.5 N.m
Overvoltage Category	III conforming to IEC 60664-1
Net Weight	0.28 kg
Environment	
Immunity To Microbreaks	1 ms
Product Certifications	CSA UL GOST GL C-Tick
Standards	IEC 61000-4-4 level 3 IEC 60068-2-27 Ea IEC 61000-4-5 IEC 61000-4-6 level 3 IEC 61000-4-11 IEC 61000-4-2 level 3 IEC 61000-4-3 IEC 61000-4-3 IEC 60068-2-6 Fc

IEC 60068-2-6 Fc

Ip Degree Of Protection	ID20 (terminal block) conferming to IEC 60520
ip begree or Protection	IP20 (terminal block) conforming to IEC 60529
	IP40 (front panel) conforming to IEC 60529
Environmental Characteristic	EMC directive conforming to IEC 61000-6-2
	EMC directive conforming to IEC 61000-6-3
	EMC directive conforming to IEC 61000-6-4
	EMC directive conforming to IEC 61131-2 zone B
	Low voltage directive conforming to IEC 61131-2
Disturbance Radiated/Conducted	Class B conforming to EN 55022-11 group 1
Pollution Degree	2 conforming to IEC 61131-2
Ambient Air Temperature For Operation	-2040 °C in non-ventilated enclosure conforming to IEC 60068-2-1 and IEC
	60068-2-2
	-2055 °C conforming to IEC 60068-2-1 and IEC 60068-2-2
Ambient Air Temperature For Storage	-4070 °C
Operating Altitude	2000 m
Maximum Altitude Transport	3048 m
Relative Humidity	95 % without condensation or dripping water

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.8 cm
Package 1 Width	10.0 cm
Package 1 Length	13.3 cm
Package 1 Weight	289.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	20
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	6.456 kg

# **Contractual warranty**

Warranty 18 months

### **Sustainability**

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance



#### **Certifications & Standards**


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
<b>Environmental Disclosure</b>	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

#### SR2B202BD

#### **Dimensions Drawings**


#### **Compact and Modular Smart Relays**

#### Mounting on 35 mm/1.38 in. DIN Rail




#### (1) With SR2USB01 or SR2BTC01

#### Screw Fixing (Retractable Lugs)

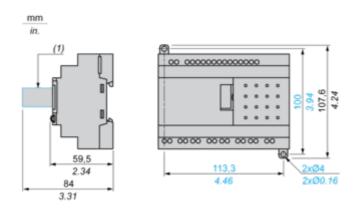

#### (1) With SR2USB01 or SR2BTC01


#### **Position of Display**



#### Connections and Schema


#### **Compact and Modular Smart Relays**

#### Connection of Smart Relays on DC Supply

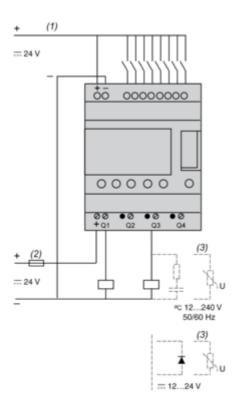


- (1) 1 A quick-blow fuse or circuit-breaker.
- (2) Fuse or circuit-breaker.
- (3) Inductive load.
- (4) Q9 and QA: 5 A (max. current in terminal C: 10 A).

#### **Discrete Input Used for 3-Wire Sensors**



(1) 1 A quick-blow fuse or circuit-breaker.

#### Connection of Thermistor Input on DC Supply

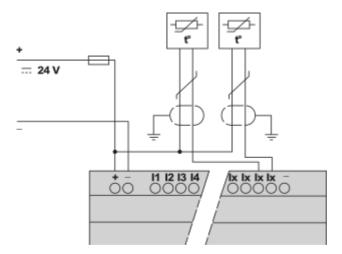


NOTE: Ix = IB...IG

#### Performance Curves

#### **Compact and Modular Smart Relays**

#### **Electrical Durability of Relay Outputs**

(in millions of operating cycles, conforming to IEC/EN 60947-5-1) DC-12 (1)

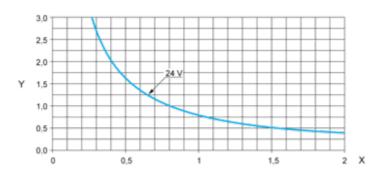


X: Current (A)

Y: Millions of operating cycles

(1) DC-12: control of resistive loads and of solid state loads isolated by opto-coupler, L/R ≤ 1 ms.

DC-13 (1)

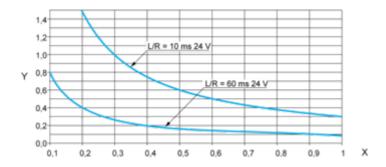

X: Current (A)

Y: Millions of operating cycles

(1) DC-13: switching electromagnets,  $L/R \le 2 \times (Ue \times Ie)$  in ms, Ue: rated operational voltage, Ie: rated operational current (with a protection diode on the load, DC-12 curves must be used with a coefficient of 0.9 applied to the number in millions of operating cycles).