

# Product data sheet

Specifications



## empty pendant control station XAC-M - 8 vertical openings

XACM085

 **Discontinued on:** Jan 29, 2021

 **Discontinued**

### Main

Range Of Product	Harmony XAC
Product Or Component Type	Pendant control station
Device Short Name	XACM

### Complementary

Control Station Type	Metal
Enclosure Material	Aluminium
Electrical Circuit Type	Control circuit
Enclosure Type	Empty enclosure
Number Of Cut-Out	8 cut-outs
Control Station Colour	Yellow
Cable Entry	Rubber sleeve with stepped entry 22...35 mm
Guard Rail	Without
Vertical Operator Cut-Out Centre	40 mm
Standards	UL 508 EN/IEC 60947-5-1 CSA C22.2 No 14
Product Certifications	CSA type 4
Protective Treatment	TH on request TC
Ambient Air Temperature For Operation	-25...70 °C
Ambient Air Temperature For Storage	-40...70 °C
Vibration Resistance	15 gn (f= 10...500 Hz) conforming to IEC 60068-2-6
Shock Resistance	100 gn conforming to IEC 60068-2-27
Overvoltage Category	Class I conforming to IEC 61140
Ip Degree Of Protection	IP65 conforming to IEC 60529
Ik Degree Of Protection	IK08 conforming to EN 50102
Mechanical Durability	1000000 cycles
Net Weight	2.41 kg

### Contractual warranty


Warranty	18 months
----------	-----------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Dimensions Drawings

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

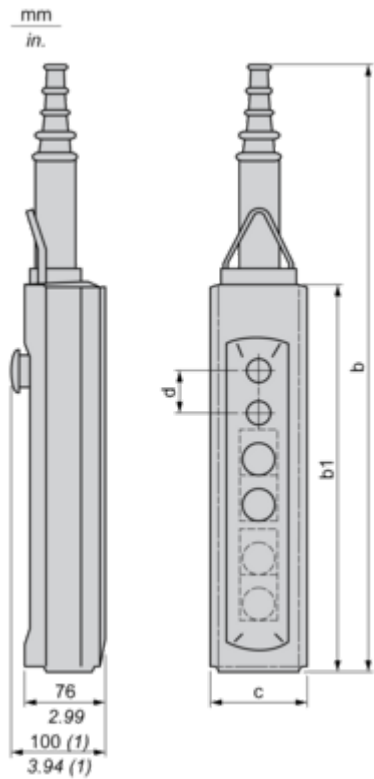

(1) With mushroom head operator


Dimensions in mm

Number of cut-outs	2	4	6	8	12
b	409	499	589	679	679
b1	220	310	400	490	490
c	98	98	98	98	98
d	40	40	40	40	30

Dimensions in in.

Number of cut-outs	2	4	6	8	12
b	16.10	19.64	23.19	26.73	26.73
b1	8.66	12.20	15.75	19.29	19.29
c	3.86	3.86	3.86	3.86	3.86
d	1.57	1.57	1.57	1.57	1.18

Protective cable sleeves

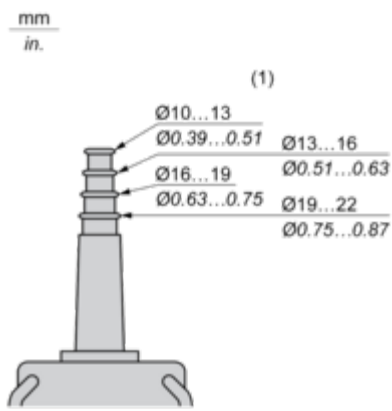


(1) Internal ø

Connections and Schema


Control of Single-Speed Reversing Motor

With XESD1181 contact block, to be ordered separately

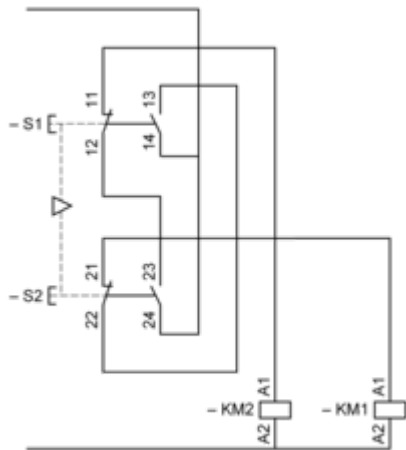

Control of 2-Speed Reversing Motor

With XESD1281 contact block, to be ordered separately

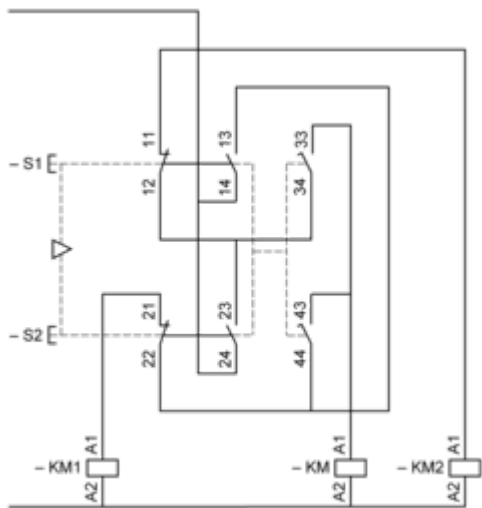

**KM** High speed contactor