

# 2 Digital output pairs expansion modules with spring term

XPSMCMDO0002G

#### Main

Range Of Product	Preventa Safety automation	
Product Or Component Type	Safe output expansion module	
Device Short Name	XPSMCM	
Electrical Connection	Spring terminal	
[Us] Rated Supply Voltage	24 V - 2020 % DC	
Number Of Inputs	2 digital for external device monitoring	
Number Of Outputs 2 safety outputs OSSD for contactor/drive connection 2 configurable for diagnostic connection		
Discrete Input Type	Isolated	
Discrete Output Type	PNP	
Function Of Module	Monitoring safety actuators for discrete output	

#### Complementary

Complementary	
Power Consumption In W	3 W
Power Dissipation In W	3 W
Integrated Connection Type	Backplane expansion bus
Number Of Terminal Blocks	4
Connections - Terminals	1 spring clamp terminals, removable terminal block 2 spring clamp terminals, removable terminal block
Load Type	Resistive load
Safety Level	Can reach category 4 conforming to ISO 13849-1 Can reach PL = e conforming to ISO 13849-1 Can reach SIL 3 conforming to IEC 61508 SILCL 3 conforming to IEC 62061
Quality Labels	CE
Discrete Input Voltage	24 V DC
Discrete Output Voltage	24 V DC
Discrete Output Current	400 mA 100 mA
Output Load	60 Ohm
Local Signalling	1 LED green with PWR marking for power ON 1 LED green with RUN marking for RUN (status) 1 LED red with E IN marking for internal error 1 LED red with E EX marking for external error 2 LEDs orange with ADDR marking for node address 2 LEDs green/red with OUT marking for output status 2 LEDs yellow with RST marking for restart signal

2 LEDs yellow with STATUS marking for output status

Cable Cross Section	0.22.5 mm <sup>2</sup> - AWG 24AWG 14 flexible cablewithout cable end
	0.252.5 mm² - AWG 23AWG 14 flexible cablewith cable end, with bezel 0.252.5 mm² - AWG 23AWG 14 flexible cablewith cable end, without bezel 0.22.5 mm² - AWG 24AWG 14 solid cablewithout cable end
	0.51 mm² - AWG 24AWG 14 solid cablewithout cable end 0.51 mm² - AWG 20AWG 18 flexible cablewith cable end, with double bezel
Mounting Support	Omega 35 mm DIN rail conforming to EN 50022
Depth	22.5 mm
Height	99 mm
Width	114.5 mm
Net Weight	0.23 kg
Environment	
Standards	IEC 62061
	IEC 61508 ISO 13849-1
	IEC 61800-5-1
Product Certifications	cULus
	RCM TÜV
In Dograp Of Protection	IDOO (

	IEC 61508	
	ISO 13849-1	
	IEC 61800-5-1	
Product Certifications	cULus	
	RCM	
	ΤÜV	
p Degree Of Protection	IP20 (enclosure)	
Ambient Air Temperature For Operation	-1055 °C	
Ambient Air Temperature For Storage	-2085 °C	
Relative Humidity	1095 %	
Pollution Degree	2	
[Uimp] Rated Impulse Withstand Voltage	Rated Impulse Withstand 4 kV conforming to IEC 61800-5-1	
Safety Reliability Data	DC > 99 %	
	MTTFd < 100 years high	
	PFHd = 3.16E-9 1/h	
nsulation	250 V AC between power supply and housing conforming to IEC 61800-5-1	
Overvoltage Category	II	
Electromagnetic Compatibility	Electrostatic discharge immunity test - test level: 6 kV (on contact) conforming to IEC 61000-4-2	
	Electrostatic discharge immunity test - test level: 20 kV (on air) conforming to IEC 61000-4-2	
	Susceptibility to electromagnetic fields - test level: 10 V/m (801000 MHz)	
	conforming to IEC 61000-4-3	
	Susceptibility to electromagnetic fields - test level: 30 V/m (1.4 GHz2 GHz)	
	conforming to IEC 61000-4-3	
Vibration Resistance	+/-0.35 mm (f= 1055 Hz) conforming to IEC 61496-1	
Shock Resistance	10 gn (duration = 16 ms) for 1000 shocks on each axis conforming to IEC 61496-1	
Service Life	20 year(s)	

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.5 cm
Package 1 Width	12.7 cm
Package 1 Length	16.3 cm
Package 1 Weight	223.0 g
Unit Type Of Package 2	S01

Number Of Units In Package 2	6
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	1.583 kg

## Sustainability

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >


## Well-being performance

<b>Ø</b>	Reach Free Of Svhc	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes
<b>⊘</b>	Pvc Free	
Reac	h Regulation	REACh Declaration
Eu R	ohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Chin	a Rohs Regulation	China RoHS declaration
Wee	9	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Calif	ornia Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

## **Dimensions Drawings**

#### **Dimensions**

#### **Spring Terminal**

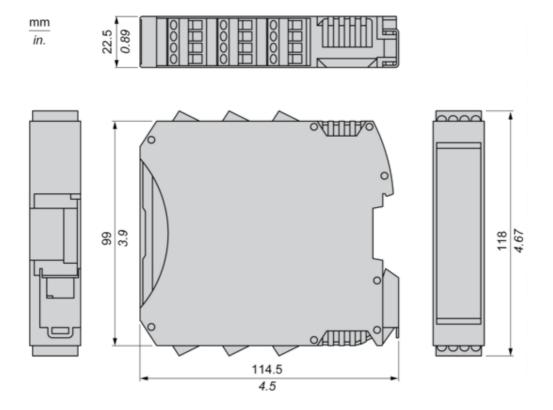


## Product data sheet


#### XPSMCMDO0002G

#### Mounting and Clearance

#### **Mounting Safety Controller CPU with Module(s)**

#### Mount BackPlane Connector on Rail








- 1 : Connect as much Backplane Connector as module to be install.
- 2: Fix the connectors to the rail (Top first).

#### Mount Safety Controller CPU with Other Module(s)







- 1 : Mount controller CPU and modules on rail.
- ${\bf 2}: {\sf Make \ sure \ that \ the \ controller \ CPU \ or \ the \ module(s) \ are \ plugged \ on \ the \ BackPlane \ connector.}$


## Product data sheet

### XPSMCMDO0002G

Connections and Schema

#### Wiring


#### **Terminal Designation**

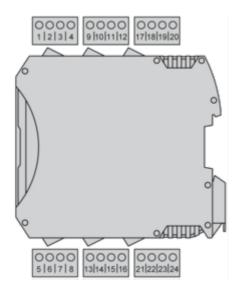

Terminal	Description	
1	24 Vdc power supply	
2		
3	Node selection	
4	0 Vdc power supply	
5	Static output 1	
6		
7	Feedback/Restart 1	
8	Condition of outputs 1A/1B	
9	Static output 2	
10		
11	Feedback/Restart 2	
12	Condition of outputs 2A/2B	
13	24 Vdc power supply	
14	-	
15	0 Vdc power supply	
16	-	

## XPSMCMDO0002G

#### Wiring Example

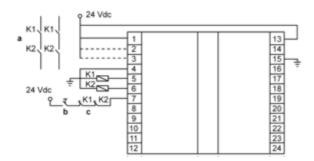

a : Contractorsb : Restartc : Feedback