

Product data sheet

Specifications



Pre assembled and pre cabled beacon, Harmony XVM, with buzzer + 1 illuminated unit, Ø 45 mm, 230 V AC

XVMM2RSWSB

❗ Discontinued

❗ Discontinued on: Mar 31, 2022

❗ End-of-service on: May 11, 2022

Main

Range Of Product	Harmony XVM
Product Or Component Type	Pre-assembled and pre-cabled beacon
Beacon Or Indicator Bank Unit Type	1 illuminated unit
Component Name	XVM
Light Source	Red super bright LED with BA 15d base steady signalling
Light Block Color	Red
[Us] Rated Supply Voltage	230 V AC
Indicator Bank Base Type	Base with integrated buzzer
Mounting Mode	Horizontal

Complementary

Kit Composition	Cover Plastic fixing plate Base unit
Mounting Diameter	45 mm
Connections - Terminals	Flying leads,clamping capacity: 1 x 0.325 mm² (AWG 22)
Marking	CE
Mounting Support	base
Short-Circuit Protection	0.2 A
[Ui] Rated Insulation Voltage	250 V conforming to IEC 60947-1
Nominal Voltage Limit	0.85...1.1 Un conforming to IEC 60947-5-1
Current Consumption	18 mA on base unit 20 mA on flash discharge tube unit
[Uimp] Rated Impulse Withstand Voltage	4 kV conforming to IEC 60947-1
Flashing Frequency	0.8 Hz
Fundamental Frequency	4 kHz
Net Weight	0.153 kg

Environment

Ip Degree Of Protection	IP54 horizontal position conforming to IEC 60529
-------------------------	--

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	CCC
Standards	EN/IEC 60947-5-1 EN/IEC 60947-1
Ambient Air Temperature For Storage	-25...70 °C
Ambient Air Temperature For Operation	-10...50 °C
Overvoltage Category	Class II conforming to IEC 60947-1 Class II conforming to IEC 60947-5-1 Class II conforming to IEC 61140
Protective Treatment	TC
Noise Level	0...80 dB at 1 m

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance



Mercury Free



RoHS Exemption Information

Yes

Certifications & Standards


Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Pre-Assembled and Pre-Cabled Tower Light with Fixing Base for Mounting on Horizontal Support (Plastic Fixing Plate)

Dimensions

Below drawing shows a tower light with 3 illuminated stages. Select the number of stages according to the product characteristics in order to get **b** dimension.

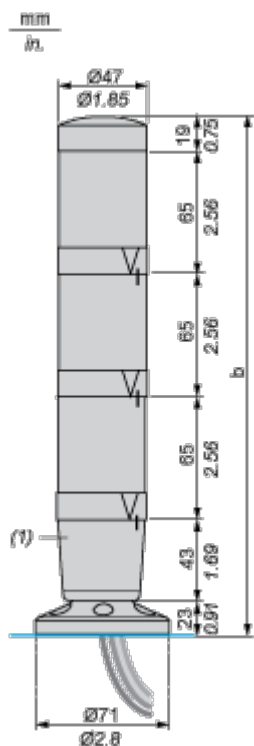

(1) Base unit with or without buzzer.

Number of illuminated units	b in mm	b in in.
1 unit	150	5.90
2 units	215	8.46
3 units	280	11.02
4 units	345	13.58

Connections and Schema

Pre-Assembled and Pre-Cabled Tower Light

Wire Colors


- 4th illuminated unit: yellow wire
- 3rd illuminated unit: green wire
- 2nd illuminated unit: white wire
- 1st illuminated unit: blue wire
- Common: black wire
- Buzzer (if integrated in base unit): grey wire

Technical Description

Base Unit with Integral Buzzer

Adjustment of Audible Signal

View from above:



- (1) Volume adjustment potentiometer: 0 to 85 dB. Use either a cross headed or flat tipped screwdriver.
- (2) 2-position selector for type of audible signal: continuous tone or intermittent tone