

selector switch head Ø22 3-position spring return CES TEC10

ZB4BG05TEC10

! Discontinued on: Oct 20, 2020

! Discontinued

Main

Range Of Product	Harmony XB4		
Product Or Component Type	Head for key selector switch		
Device Short Name	ZB4		
Bezel Material	Chromium plated metal		
Mounting Diameter	22 mm		
Head Type	Standard		
Sale Per Indivisible Quantity	1		
Shape Of Signaling Unit Head	Round		
Return	Right to centre		
Operator Profile	Black key switch		
Type Of Operator	Spring return		
Operator Position Information	3 positions +/- 45°		
Type Of Keylock	CES TEC10		
Key Withdrawal Position	Center		

Complementary

Cad Overall Width	29 mm				
Cad Overall Height	29 mm				
Cad Overall Depth	72 mm				
Net Weight	0.17 kg				
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m				
Mechanical Durability	1000000 cycles				
Electrical Composition Code	C3 for <6 contacts using single blocks in front mounting C4 for <6 contacts using single and double blocks in front mounting C5 for <5 contacts using single blocks in front mounting C6 for <5 contacts using single and double blocks in front mounting C7 for <4 contacts using single blocks in front mounting C8 for <4 contacts using single and double blocks in front mounting C11 for <3 contacts using single blocks in front mounting				
Device Presentation	Basic element				

Environment

Protective Treatment TH

Ambient Air Temperature For Storage	-4070 °C				
Ambient Air Temperature For Operation	-4070 °C				
Overvoltage Category	Class I conforming to IEC 60536				
Ip Degree Of Protection	IP66 conforming to IEC 60529 IP67 IP69 IP69K				
Nema Degree Of Protection NEMA 13 NEMA 4X					
Ik Degree Of Protection IK06 with keyhole cover ZBGP conforming to IEC 50102					
Standards	EN/IEC 60947-5-5 CSA C22.2 No 14 UL 508 EN/IEC 60947-1 EN/IEC 60947-5-4 GB 14048.5 EN/IEC 60947-5-1				
Product Certifications	GL BV LROS (Lloyds register of shipping) UL listed DNV CSA				
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6				
Shock Resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27				

Contractual warranty

Warranty 18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes


Certifications & Standards

California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov		
Circularity Profile	End of Life Information		
Environmental Disclosure	Product Environmental Profile		
China Rohs Regulation	China RoHS declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
Reach Regulation	REACh Declaration		

ZB4BG05TEC10

Dimensions Drawings

Dimensions




ZB4BG05TEC10


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

Connection by Faston Connectors






- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0^{+0.4}$ / 0.88 in. $_0^{+0.016}$)
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

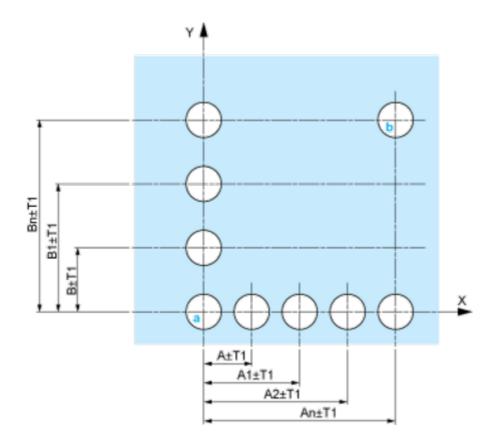


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

ZB4BG05TEC10

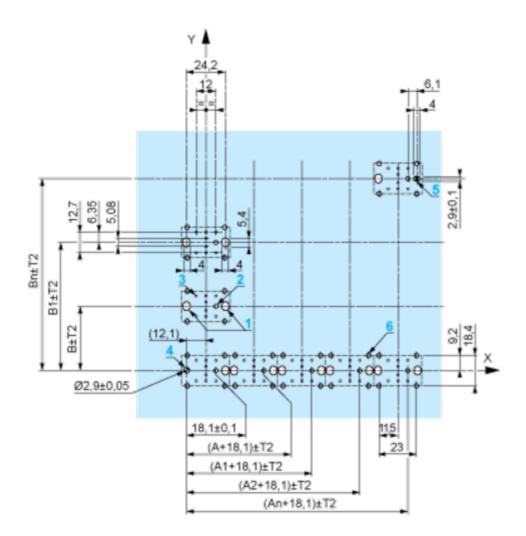

A: 30 mm min. B: 40 mm min. Dimensions in in.

ZB4BG05TEC10

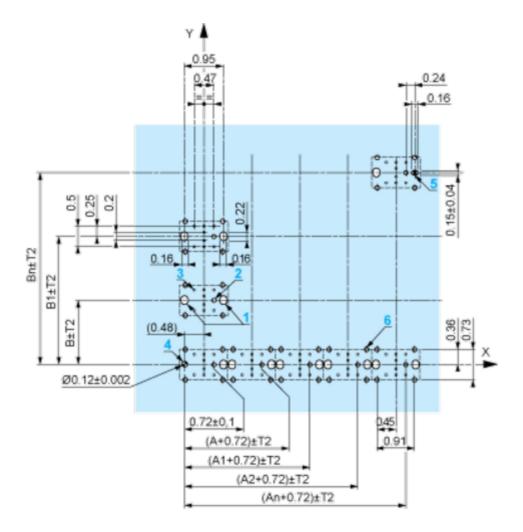

A: 1.18 in. min. **B:** 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- $_{\bullet}$ Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}~$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

ZB4BG05TEC10

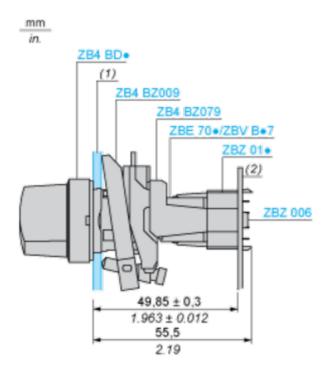

- (1) Panel
- (2) Printed circuit board


Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•


Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ 01•.

ZB4BG05TEC10


Technical Description














Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Legend

Single contact



Double contact



Light block



Possible location



Life Is On Schneider

Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



Push	Position	Тор			
		Bottom			
	Location		Left	Centre	Right
	State		1	1	0
Contacts	N/O		closed	closed	open
	N/C		open	open	closed

Position 0°



Push	Position	Тор			
		Bottom			
	Location		Left	Centre	Right
State			0	0	0
Contacts	N/O		open	open	open
Contacts	N/C		closed	closed	closed

Product data sheet ZB4BG05TEC10

Position 45°



Push	Position	Тор			
		Bottom			
	Location		Left	Centre	Right
	State		0	1	1
Contacts	N/O		open	closed	closed
	N/C		closed	open	open