Specifications



Head for key selector switch, Harmony XB4, metal, black, 22mm, key 455, 3 positions, stay put

ZB4BG3

Main

Range Of Product	Harmony XB4		
Product Or Component Type	Head for key selector switch		
Device Short Name	ZB4		
Bezel Material	Chromium plated metal		
Mounting Diameter	22 mm		
Head Type	Standard		
Sale Per Indivisible Quantity	1		
Shape Of Signaling Unit Head	Round		
Operator Profile	Black key switch		
Operator Position Information	3 positions +/- 45°		
Type Of Keylock	Key 455		
Key Withdrawal Position	Center		

Complementary

J					
Cad Overall Width	29 mm				
Cad Overall Height	29 mm				
Cad Overall Depth	72 mm				
Net Weight	0.098 kg				
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m				
Mechanical Durability	1000000 cycles				
Electrical Composition Code	C3 for <6 contacts using single blocks in front mounting C4 for <6 contacts using single and double blocks in front mounting C5 for <5 contacts using single blocks in front mounting C6 for <5 contacts using single and double blocks in front mounting C7 for <4 contacts using single blocks in front mounting C8 for <4 contacts using single blocks in front mounting C11 for <3 contacts using single blocks in front mounting				
Device Presentation	Basic element				

Environment

Protective Treatment	тн
Ambient Air Temperature For Storage	-4070 °C
Ambient Air Temperature For Operation	-4070 °C
Overvoltage Category	Class I conforming to IEC 60536

Ip Degree Of Protection	IP66 conforming to IEC 60529				
	IP67				
	IP69				
	IP69K				
Nema Degree Of Protection	NEMA 13				
	NEMA 4X				
Ik Degree Of Protection	IK06 with keyhole cover ZBGP conforming to IEC 50102				
Standards	EN/IEC 60947-5-5				
	CSA C22.2 No 14				
	UL 508				
	GB 14048.5				
	EN/IEC 60947-5-1				
	EN/IEC 60947-5-4				
	EN/IEC 60947-1				
Product Certifications	LROS (Lloyds register of shipping)				
	GL				
	UL listed				
	BV				
	DNV				
	CSA				
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6				
Shock Resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27				
	50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27				
	00000-2-21				

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.000 cm
Package 1 Width	5.400 cm
Package 1 Length	9.200 cm
Package 1 Weight	103.000 g
Unit Type Of Package 2	BB1
Number Of Units In Package 2	5
Package 2 Height	8.600 cm
Package 2 Width	26.000 cm
Package 2 Length	3.300 cm
Package 2 Weight	515.000 g
Unit Type Of Package 3	S03
Number Of Units In Package 3	100
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	10.892 kg

Contractual warranty

Warranty

18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance



Eq


Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Circularity Profile	End of Life Information			
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov			

Dimensions Drawings

Dimensions

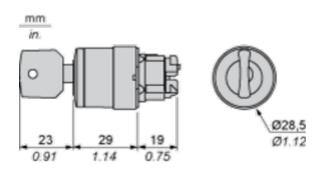


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)



Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

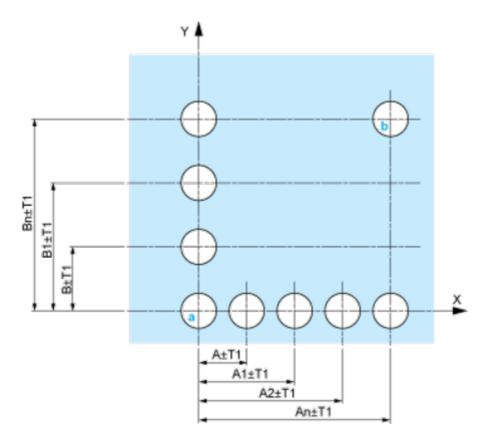


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

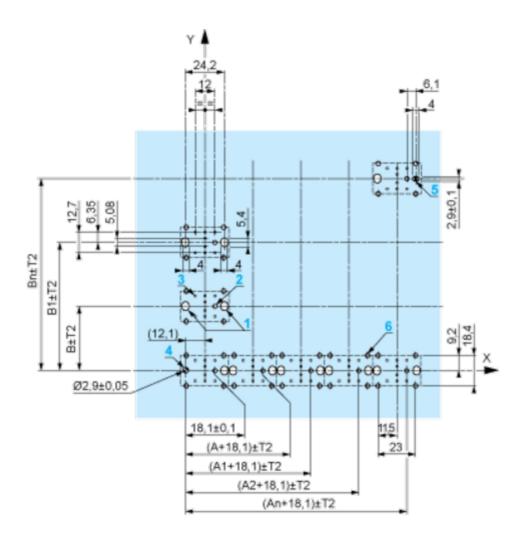

A: 30 mm min. B: 40 mm min. Dimensions in in.

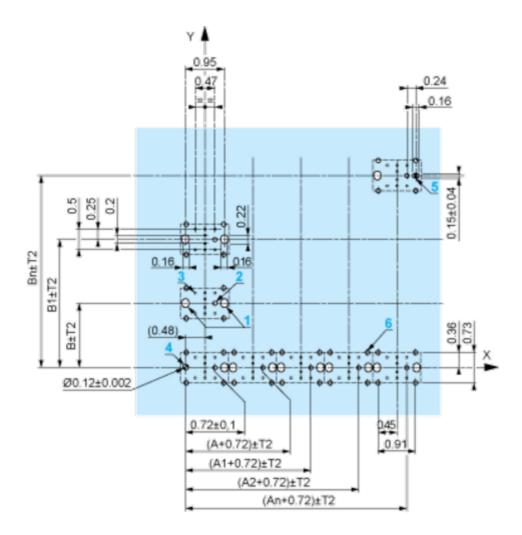

A: 1.18 in. min. **B:** 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

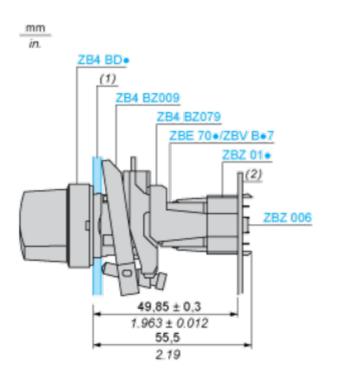

(1) Panel


(2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•


- 1 2 elongated holes for ZBZ 006 screw access
- $_{\bullet}$ 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01-
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•


Dimensions An + 18.1 relate to the Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 holes for centring adapter ZBZ 01•.


Technical Description














Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Legend

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



		Тор			
Push	Position	Bottom			\bigtriangleup
	Location		Left	Centre	Right
	State		1	1	0
Contacts	N/O		closed	closed	open
	N/C		open	open	closed

Position 0°



	Position	Тор			
Push		Bottom	\bigtriangleup	\bigtriangleup	\bigtriangleup
	Location		Left	Centre	Right
	State		0	0	0
Contacts	N/O		open	open	open
	N/C		closed	closed	closed

Position 45°



	Position	Тор			
Push	FUSILION	Bottom	\bigtriangleup		
	Location		Left	Centre	Right
	State		0	1	1
Contacts	N/O		open	closed	closed
	N/C		closed	open	open