

Head for key selector switch, Harmony XB4, metal, black, 22mm, key 455, 2 positions, spring return right to left

ZB4BG6

Main

Range Of Product	Harmony XB4			
Product Or Component Type	Head for key selector switch			
Device Short Name	ZB4			
Bezel Material	Chromium plated metal			
Mounting Diameter	22 mm			
Head Type	Standard			
Sale Per Indivisible Quantity	1			
Shape Of Signaling Unit Head	Round			
Return	Right to left			
Operator Profile	Black key switch			
Operator Position Information	2 positions 90°			
Type Of Keylock	Key 455			
Key Withdrawal Position	Left			

Complementary

•						
Cad Overall Width	29 mm					
Cad Overall Height	29 mm					
Cad Overall Depth	72 mm					
Net Weight	0.098 kg					
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m					
Mechanical Durability	1000000 cycles					
Electrical Composition Code	C3 for <6 contacts using single blocks in front mounting C4 for <6 contacts using single and double blocks in front mounting C5 for <5 contacts using single blocks in front mounting C6 for <5 contacts using single and double blocks in front mounting C7 for <4 contacts using single blocks in front mounting C8 for <4 contacts using single and double blocks in front mounting C11 for <3 contacts using single blocks in front mounting C15 for <1 contacts using single blocks in front mounting					
Device Presentation	Basic element					

Environment

Protective Treatment	тн			
Ambient Air Temperature For Storage	-4070 °C			
Ambient Air Temperature For	-4070 °C			

Overvoltage Category	Class I conforming to IEC 60536			
Ip Degree Of Protection	IP66 conforming to IEC 60529			
	IP67			
	IP69			
	IP69K			
Nema Degree Of Protection	NEMA 13			
	NEMA 4X			
Ik Degree Of Protection IK06 with keyhole cover ZBGP conforming to IEC 50102				
Standards	EN/IEC 60947-1			
	EN/IEC 60947-5-5			
	EN/IEC 60947-5-4			
	UL 508			
	CSA C22.2 No 14			
	GB 14048.5			
	EN/IEC 60947-5-1			
Product Certifications	LROS (Lloyds register of shipping)			
	UL listed			
	DNV			
	GL			
	CSA			
	BV			
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6			
	5 gir (1- 2555 riz) contorning to 1EG 00000-2-0			
Shock Resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27			
	50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27			

Packing Units

PCE				
1				
3.600 cm				
5.400 cm				
9.100 cm				
103.000 g				
BB1				
5				
8.800 cm				
26.000 cm				
3.300 cm				
520.000 g				
S03				
100				
30.000 cm				
30.000 cm				
40.000 cm				
10.861 kg				

Contractual warranty

Warranty 18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information


Yes

Certifications & Standards

California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov		
Circularity Profile	End of Life Information		
Environmental Disclosure	Product Environmental Profile		
China Rohs Regulation	China RoHS declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
Reach Regulation	REACh Declaration		

Dimensions Drawings

Dimensions




ZB4BG6

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in **Connection by Faston Connectors Connectors or on Printed Circuit Board** (1)(2)(3)(4)




- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0^{+0.4}$ / 0.88 in. $_0^{+0.016}$)
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

ZB4BG6


Panel Cut-outs (Viewed from Installer's Side)

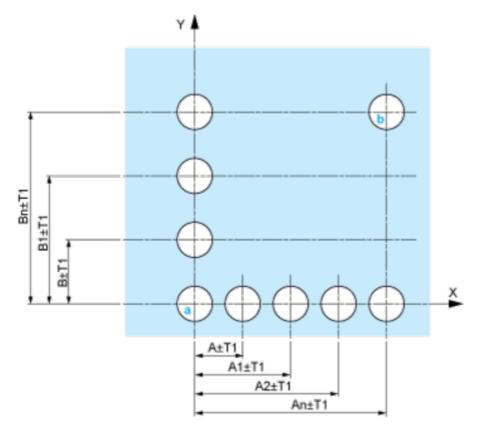

A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.


Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

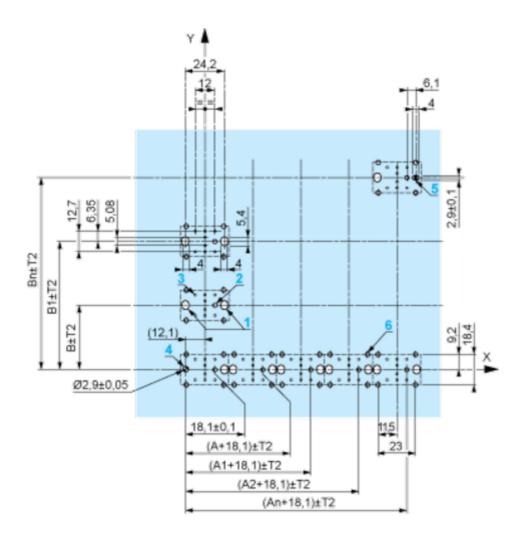

A: 30 mm min. B: 40 mm min. Dimensions in in.

ZB4BG6

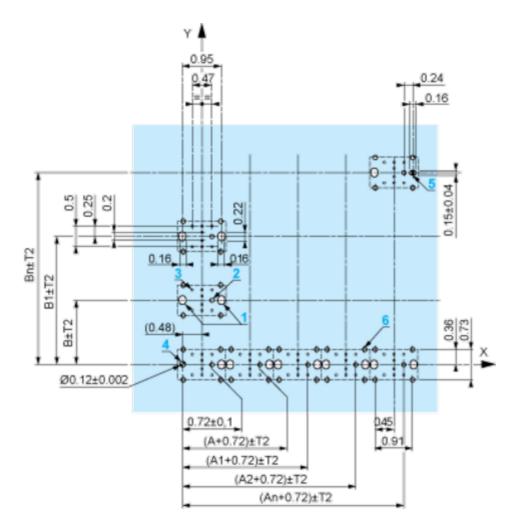

A: 1.18 in. min. **B:** 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- $_{\bullet}$ Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

ZB4BG6

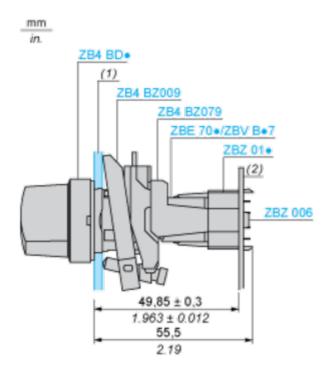


- (1) Panel
- (2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•


- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•


Dimensions An + 18.1 relate to the \varnothing 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ 01•.


Technical Description














Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C




17

Legend

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 2-position Selector Switch Body

Position 315°



Push	Position	Тор			
		Bottom			
	Location		Left	Centre	Right
	State		0	0	0
Contacts	N/O		open	open	open
	N/C		closed	closed	closed

Position 45°



	Position	Тор			
Push		Bottom			
	Location		Left	Centre	Right
	State		1	1	1
Contacts	N/O		closed	closed	closed
	N/C		open	open	open