

Selector switch head, Harmony XB5, plastic, green, 22mm, 2 positions, spring return from right to left, grey bezel

ZB5AD403C0

Main

| Range Of Product | Harmony XB5 | | | |
|-------------------------------|-----------------------------|--|--|--|
| Product Or Component Type | Head for selector switch | | | |
| Device Short Name | ZB5 | | | |
| Bezel Material | Plastic colour plated grey | | | |
| Mounting Diameter | 22 mm | | | |
| Head Type | Standard | | | |
| Sale Per Indivisible Quantity | 1 | | | |
| Shape Of Signaling Unit Head | Round | | | |
| Type Of Operator | Right to left spring return | | | |
| Operator Profile | Green standard handle | | | |
| Operator Position Information | 2 positions 90° | | | |

Complementary

| Cad Overall Width | 29 mm | | | | |
|-----------------------------|---|--|--|--|--|
| Cad Overall Height | 29 mm | | | | |
| Cad Overall Depth | 46 mm | | | | |
| Net Weight | 0.02 kg | | | | |
| Mechanical Durability | 1000000 cycles | | | | |
| Station Name | XALD 15 cut-outs XALK 25 cut-outs | | | | |
| Electrical Composition Code | C3 for <6 contacts using single blocks in front mounting C4 for <6 contacts using single and double blocks in front mounting C5 for <5 contacts using single blocks in front mounting C6 for <5 contacts using single and double blocks in front mounting C7 for <4 contacts using single blocks in front mounting C8 for <4 contacts using single and double blocks in front mounting C11 for <3 contacts using single blocks in front mounting C15 for <1 contacts using single blocks in front mounting SF1 for <3 contacts using single blocks in front mounting SR1 for <3 contacts using single blocks in rear mounting | | | | |
| Device Presentation | Basic element | | | | |

Environment

| Protective Treatment | тн | |
|---------------------------------------|----------|--|
| Ambient Air Temperature For Storage | -4070 °C | |
| Ambient Air Temperature For Operation | -4070 °C | |

| Overvoltage Category | Class II conforming to IEC 60536 | | | | | |
|---------------------------------------|---|--|--|--|--|--|
| Ip Degree Of Protection | IP67 conforming to IEC 60529 | | | | | |
| Nema Degree Of Protection | NEMA 13 NEMA 4X | | | | | |
| Resistance To High Pressure Washer | 7000000 Pa at 55 °C, distance : 0.1 m | | | | | |
| Ik Degree Of Protection | IK06 conforming to IEC 50102 | | | | | |
| Standards | JIS C8201-5-1 CSA C22.2 No 14 EN/IEC 60947-1 EN/IEC 60947-5-4 UL 508 EN/IEC 60947-5-1 JIS C8201-1 | | | | | |
| Product Certifications | GL CSA BV LROS (Lloyds register of shipping) DNV UL listed | | | | | |
| Vibration Resistance | 5 gn (f= 2500 Hz) conforming to IEC 60068-2-6 | | | | | |
| Shock Resistance | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 | | | | | |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|--------|
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 4.2 cm |
| Package 1 Width | 3.3 cm |
| Package 1 Length | 5.2 cm |
| Package 1 Weight | 24.0 g |

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >


Guide to assess a product's sustainability >

Well-being performance

| ⊘ F | Reach Free Of Svhc | |
|------------|----------------------------|---|
| 2 1 | Гохіс Heavy Metal Free | |
| ⊘ N | Mercury Free | |
| ⊘ F | Rohs Exemption Information | Yes |
| | | |
| Reach | Regulation | REACh Declaration |
| Eu Ro | hs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China | Rohs Regulation | China RoHS declaration |
| Califor | rnia Proposition 65 | WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |

Dimensions Drawings


Dimensions



Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

| | | | | 0 |
|---|---------|----------|---------|----------|
| Connections | a in mm | a in in. | b in mm | b in in. |
| By screw clamp terminals or plug-in connector | 40 | 1.57 | 30 | 1.18 |
| By Faston connectors | 45 | 1.77 | 32 | 1.26 |
| On printed circuit board | 30 | 1.18 | 30 | 1.18 |

Detail of Lug Recess




(1) Diameter on finished panel or support

Apr 19, 2024

- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

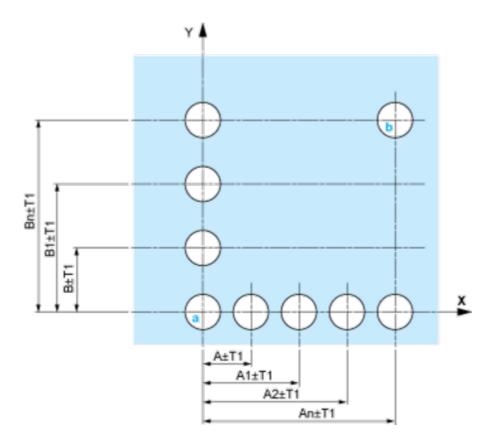


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.


Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

ZB5AD403C0

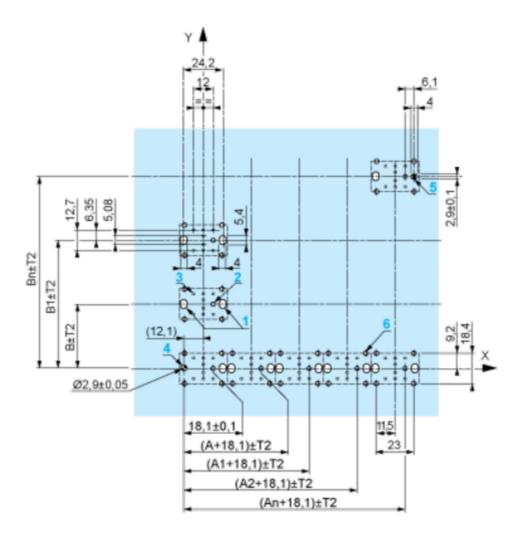

A: 30 mm min. B: 40 mm min. Dimensions in in.

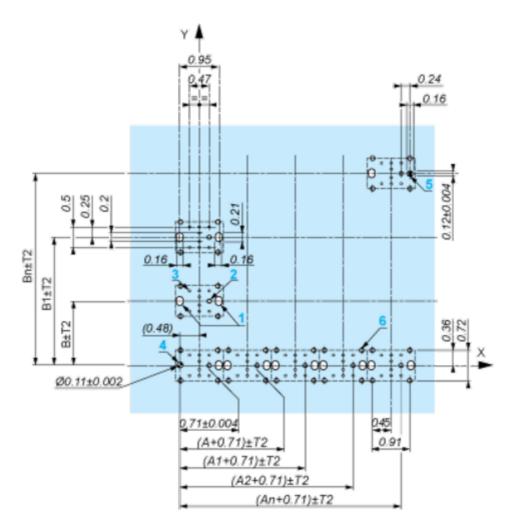

A: 1.18 in. min. **B:** 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- $_{\bullet}$ Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

ZB5AD403C0

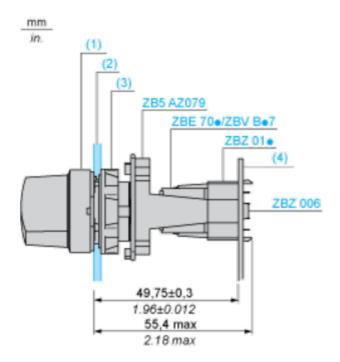

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•


- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ01•.


Product data sheet


ZB5AD403C0


Technical Description














Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C




17

Legend

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 2-position Selector Switch Body

Position 315°



| Push | Position | Тор | | | | |
|----------|----------|--------|--------|--------|--------|--|
| | | Bottom | | | | |
| | Location | | Left | Centre | Right | |
| | State | | 0 | 0 | 0 | |
| Contacts | N/O | | open | open | open | |
| | N/C | | closed | closed | closed | |

Position 45°



| Push | | Тор | | | |
|----------|----------|--------|--------|--------|--------|
| | Position | Bottom | | | |
| | Location | | Left | Centre | Right |
| | State | | 1 | 1 | 1 |
| Contacts | N/O | | closed | closed | closed |
| | N/C | | open | open | open |