

Product data sheet

Specifications



temperature control relay RTC - 48x48 mm - 24V AC/DC - 2 relays, comm, alarm

RTC48PUNCRRLU

Discontinued on: Jan 27, 2022

Discontinued

Main

Range Of Product	Zelio Control
Product Or Component Type	Modular measurement and control relays
Relay Type	Temperature control relays
Product Specific Application	Industrial machines HVAC Heating or cooling Packaging
Relay Name	RTC

Complementary

Outer Dimension	48 x 48 mm 1/16 DIN
Analogue Input Type	Thermocouple (thermocouple J, K, R, B, S, T, E, N, PLII, C(W/Re5-26)) Temperature probe (temperature probe: Pt 100, JPt 100) Voltage 0...1 V DC Voltage 0...5 V DC Voltage 1...5 V DC Voltage 0...10 V DC Current 0...20 mA Current 4...20 mA
[Us] Rated Supply Voltage	24 V AC/DC
[Us] Rated Supply Voltage	24 V AC/DC
Supply Voltage Limits	20...28 V
Measurement Accuracy	0.2 % full scale
Sampling Duration	250 ms
Number Of Outputs	1 relay output with NO contact for output 1 1 relay output with NO contact for output 2
Output Type	Relay output at 250 V AC / 3 A on resistive load Relay output at 250 V AC / 1 A on inductive load
Alarm Output	1 C/O
Power Consumption In Va	8 VA at 250 V AC
Communication Port Protocol	Modbus RTU and ASCII
Method Of Access	Slave
Transmission Frame	RTU/ASCII
Physical Interface	RS485 non isolated
Exchange Mode	Half duplex
Transmission Rate	9600, 19200 kbit/s

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Function Available	PID Auto tuning
Marking	CE
Operating Position	Any position
Display Type	11 segments LCD
Display Digits	5
Signalling Function	Process value green, orange and red Output status (OUT1, OUT2) orange Alarm status (EV1, EV2) orange Transmission/reception activity (TX/TR) orange Setpoint value green
Mounting Support	Panel
Net Weight	120 g

Environment

Standards	EN 61326-1 CSA C22.2 No 24-93 EN 61010-1
Product Certifications	cURus (873)
Ambient Air Temperature For Storage	-25...80 °C
Ambient Air Temperature For Operation	0...50 °C
Relative Humidity	35...85 % without condensation
Vibration Resistance	1 gn (f= 10...55 Hz) conforming to IEC 60068-2-6
Shock Resistance	10 gn conforming to IEC 60068-2-27
Ip Degree Of Protection	IP66 (front face) conforming to IEC 60529 IP20 (rear)
Nema Degree Of Protection	NEMA 4X front face

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.


[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

Well-being performance


 Mercury Free

Reach Regulation	REACH Declaration
Eu Rohs Directive	Not applicable, out of EU RoHS legal scope
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Dimensions Drawings

48 x 48 Size – 1/16 DIN Standard

Panel Mounting : Mounting Frame Supplied

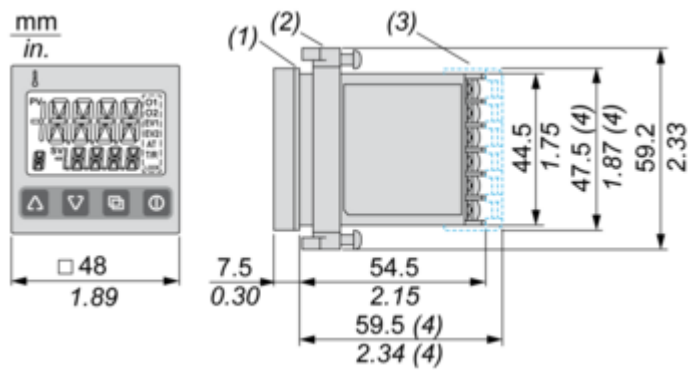

- (1) Gasket
 - (2) Mounting frame
 - (3) Terminal cover, to be ordered separately.
 - (4) When Terminal cover (sold separately) is used
- Panel cut-out

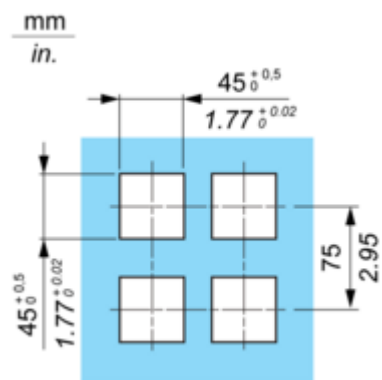


Side stick mounting: n units (water-proof property lost in this case)



Connections and Schema

Wiring Diagram

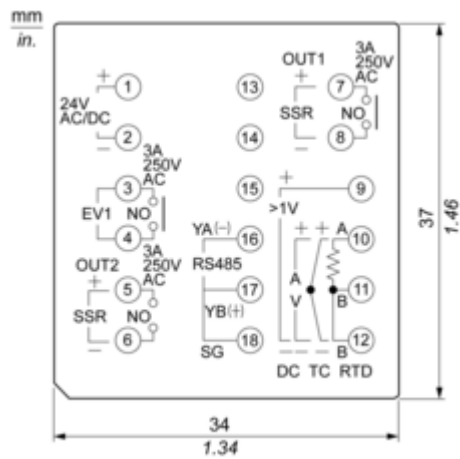

- EV : Alarm output
- OUT : Control output
- DC : DC current or DC voltage input
- TC : Thermocouple input
- RTD : Resistance temperature detector input
- RS485 : Serial communication
- SSR : Solid State relay