

Product data sheet

Specifications



Inductive proximity sensors XS,
inductive sensor XS5 M18, L39mm,
brass, Sn5mm, 12...24 VDC, cable 2
m

XS518BSDAL2

! Discontinued

! Discontinued on: May 31, 2023

Main

Range Of Product	Telemecanique Inductive proximity sensors XS
Series Name	General purpose
Sensor Type	Inductive proximity sensor
Device Application	-
Sensor Name	XS5
Sensor Design	Cylindrical M18
Size	39 mm
Body Type	Fixed
Detector Flush Mounting Acceptance	Flush mountable
Material	Metal
Type Of Output Signal	Discrete
Wiring Technique	2-wire
[Sn] Nominal Sensing Distance	5 mm
Discrete Output Function	1 NO
Output Circuit Type	DC
Electrical Connection	Cable
Cable Length	2 m
[Us] Rated Supply Voltage	12...24 V DC with reverse polarity protection
Switching Capacity In Ma	1.5...100 mA DC with overload and short-circuit protection
Ip Degree Of Protection	IP68 double insulation conforming to IEC 60529 IP69K conforming to DIN 40050

Complementary

Thread Type	M18 x 1
Detection Face	Frontal
Front Material	PPS
Enclosure Material	Nickel plated brass
Operating Zone	0...4 mm
Differential Travel	1...15% of Sr
Cable Composition	2 x 0.34 mm²

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Wire Insulation Material	PVC
Status Led	Output state: 1 LED (yellow)
Supply Voltage Limits	10...36 V DC
Maximum Residual Current	0.5 mA open state
Switching Frequency	<= 3000 Hz
Maximum Voltage Drop	<4 V (closed)
Maximum Delay First Up	10 ms
Maximum Delay Response	0.15 ms
Maximum Delay Recovery	0.2 ms
Marking	CE
Threaded Length	28 mm
Length	39 mm
Net Weight	0.11 kg

Environment

Product Certifications	CSA UL
Ambient Air Temperature For Operation	-25...70 °C
Ambient Air Temperature For Storage	-40...85 °C
Vibration Resistance	25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock Resistance	50 gn for 11 ms conforming to IEC 60068-2-27

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.1 cm
Package 1 Width	9.4 cm
Package 1 Length	13.5 cm
Package 1 Weight	108.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	44
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	5.338 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



RoHS/REACH

Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Certifications & Standards

Reach Regulation [REACH Declaration](#)


Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)

Circularity Profile [End of Life Information](#)

California Proposition 65
WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Diisodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings


Dimensions

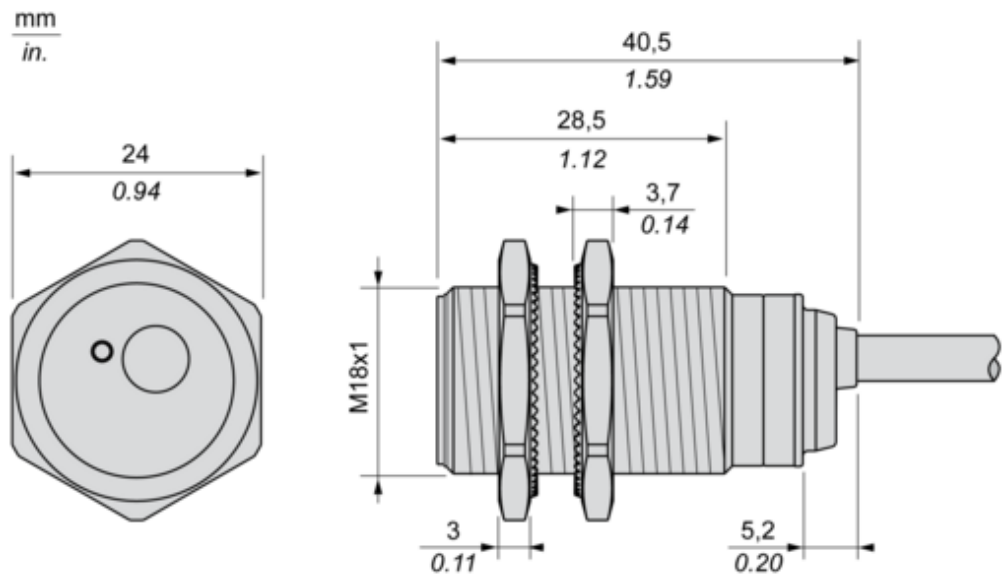

Mounting and Clearance


Minimum Mounting Distances

Side by side

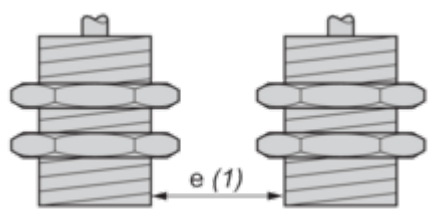


$e (1) \geq 10 \text{ mm}/0.39 \text{ in.}$

Face to face

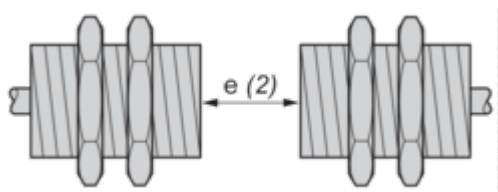


$e (2) \geq 60 \text{ mm}/2.36 \text{ in.}$

Facing a metal object

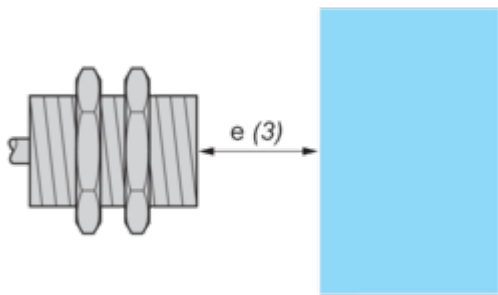

$e (3) \geq 15 \text{ mm}/0.60 \text{ in}$

Mounting

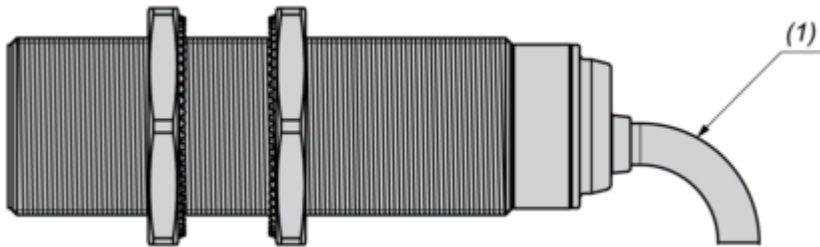


(1) Bending cable: 4 x external cable diameter

Connections and Schema

Wiring Schemes

2-Wire Non-polarised

NO output

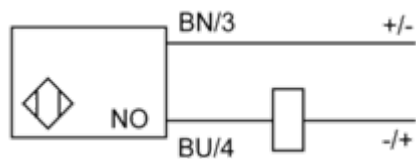


BU : Blue
BN : Brown

Performance Curves

Performance Curves

Standard Steel Target : 18x18x1 mm

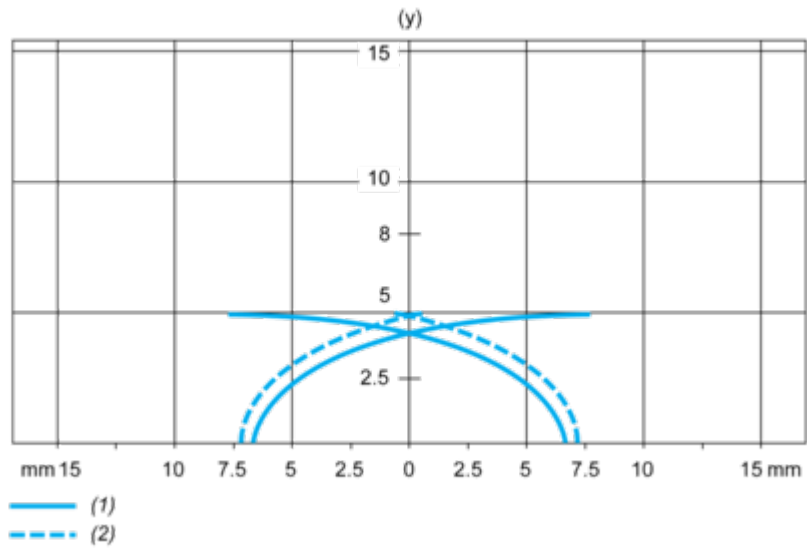

- (1) Pick-up points
- (2) Drop-out points (object approaching from the side)
- (y) Sensing distance in mm